



Bell Laboratories

subject: Study of UNIX

date: September 14, 1972

from: T. R. Bashkow

Messrs. W. S. Bartlett  
D. P. Clayton  
D. H. Copp  
Mmes. G. J. Hansen  
J. Hintz  
Mr. L. J. Kelly  
Miss R. L. Klein

Messrs. J. J. Ludwig  
J. F. Maranzano  
Mrs. G. Pettit  
Messrs. J. E. Ritacco  
B. A. Tague  
D. W. Vogel  
Mrs. L. S. Wright

On Tuesday, September 19, at 9:30 a.m. in Room 2A-418 at Murray Hill, I will give a talk on my study of the UNIX operating system. The emphasis will be on the structure, functional components, and internal operation of the system.

MH-8234-TRB-mbh

Copy to  
Mr. G. L. Baldwin

T. R. Bashkow

Subject: Preliminary Release of  
UNIX Implementation Document

Date: 6/20/72

The contents of this document are incomplete and subject to rapid change both in subject matter and organization. The purpose of this release is to make the information it contains available to persons who have an immediate and pressing need. The sections that are included here contain the following information:

<u>Section</u>	<u>Contents</u>
E.0 - E.10	Commented listing of UNIX operating system
E.11	Commented listing of UNIX shell
E.12	Commented listing of UNIX initialization program
F	System Overview
G	Data Base Item Descriptions
H.0 - H.9	Verbal descriptions of UNIX routines.

The verbal descriptions in sections H.0 - H.9 correspond to the listings in E.0 - E.9. However, the routines are listed in alphabetical order in the H sections, rather than in the order they appear in the listings.

J. DeFelice

modifications to UNIX to accomodate the T4002A graphic console

uo Page 1 add

```
gks = 177 ---- / graphic input status
gkb = 177 ---- / graphic input buffer
gps = 177 ---- / graphic output status
gpb = 177 ---- / graphic output buffer
```

uo Page 2 add somewhere

```
dsipi; 240 / graphic input interrupt vector
```

uo Page 3 add at end of "set up time out routines"

```
mov $ wakdsp, (r0) / time out subroutine for display
```

uo Page 4 add at end of device directory

```
23.
<dsp\0\0\0\0> / T4002A
```

u7 Page 4,5 add to end of iopen list

```
odsp / T4002A
```

add program odsp below

```
odsp: / open T4002A for reading or writing
mov $100,$gks / set interrupt enable on input
mov $14,r1 / put "np" in r1 (erase, home)
jsr r0,chout / output the char
mov $21,r1 / put "dc1" in r1 (turn on joystick)
jsr r0,chout / output char
mov $37,r1 / put "us" in r1 (alpha mode)
jsr r0,chout / output char
br sret
```

/Note: a graphic block and buffer like the tty's are not used. May need them when more than 1 dispaly is added.

u6 Page 1 add at end of readi list

```
rdsp / T4002A
```

add the routine rdsp

```
rdsp: / read from the graphics terminal
mov $240,$sps / set ps to 5
jsr r0,getc; 22 / take char off clist and put it in r1
br 1f / list is empty, go to sleep
clr $sps / clear ps
jsr r0,passc / move char to user core
br rdsp / get next char
```

1:

```

mov    r5,-(sp) / save r5
jsr    r0,sleep; 22 / put input process to sleep
mov    (sp)+,r5 / restore r5
br     rdsp / try again

```

add somewhere dsp:

```

dsp: / graphic display input interrupt routine
jsr    r0,setisp / save r1, r2, r3
mov    *$gkb,r1 / put char in r1
inc    *$,gks / set reader enable bit
bic    $!177,r1 / strip char to 7 bits
jsr    r0,putc; 22 / put char on the clist
br     1f / if full return

```

```

/Note: char is not echoed and quit
/      (fs) and interrupt (del) char are
/      not processed

```

```

cmp    r1,$4 / char = eot
beq    1f
cmp    r1,$12 / char = lf
beq    1f
cmpb   cc+22,$15 / are there less than 15 char on the clist?
blo    retisp / yes, return

```

```

1: jsr r0,wakeup;runq; 22 / wakeup the process that's inputting
br     retisp / return

```

u6 Page 3 add to bottom of writei list

wdsp / T4002A

add routines wdsp, chout, and wakdsp

```

/ write routine for the T4002A graphics console
/ a character at a time is taken out of the graphic
/ instruction buffer and sent over to the T4002A

```

```

wdsp: / write on the graphic display
jsr    r0,cpass / set next char from user buffer area
/      / if none, return to syswrite
tst    r1 / is the character null
beq    wdsp / yes, get the next character
jsr    r0,chout / output the character
br     wdsp / get next character

```

```

chout: / do the actual output of the character
tstb   *$gps / check for output ready
bge    chout / wait for ready

```

```

1: tstb   toutt+12 / check time out
bne    1b / wait for it to be 0
movb   r1,$gpb / output the character
cmpb   r1,$14 / is char ff (erase, home?)
beq    1f
cmpb   r1,$30 / is char "can" (erase)?
beq    1f
cmpb   r1,$5 / is char enq (digitize joystick)?

```

```

    beq    2f
    rts    r0
1:    movb  $30,toutt+12 / put 500 ms delay for erase
    jsr   r0,sleep; 23 / put output process to sleep
    rts    r0
2:    movb  $2,toutt+12 / put in 20 ms delay for joystick
    rts    r0

/ time out subroutine for display
wakdsp: / wakeup the output process
        jsr  r0, wakeup; runq+2; 23
        rts   r0

```

UNIX IMPLEMENTATION

/ u0 -- unix

cold = 0  
 orig = 0 . / orig = 0. relocatable

rkda = 177412 / disk address reg	rk03/rk11
rkds = 177400 / driv status reg	rk03/rk11
rkcs = 177404 / control status reg	rk03/rk11
rcsr = 174000 / receiver status reg	dc-11
rcbr = 174002 / receiver buffer reg	dc-11
tcsr = 174004 / xmtr status reg	dc-11
tcbr = 174006 / xmtr buffer reg	dc-11
tcst = 177340 / dec tape control status	tc11/tu56
tccm = 177342 / dec tape command reg	tc11/tu56
tcwc = 177344 / word count	tc11/tu56
tcba = 177346 / bus addr	tc11/tu56
tcdt = 177350 / data reg	tc11/tu56
dcs = 177460 / drum control status	rf11/rs11
dae = 177470 / drum address extension	rf11/rs11
lks = 177546 / clock status reg	kw11-1
prs = 177550 / papertape reader status	pc11
prb = 177552 / buffer	pc11
pps = 177554 / punch status	pc11
ppb = 177556 / punch buffer	pc11
/lps = 177514 line printer status	(future)
/lpb = 177516 line printer buffer	(future)
tkc = 177560 / console read status	asr-33
tkb = 177562 / read buffer	asr-33
tps = 177564 / punch status	asr-33
tpb = 177566 / punch buffer	asr-33
ps = 177776 / processor status	

halt = 0  
 wait = 1  
 rti = 2

nproc = 16. / number of processes  
 nfiles = 50.  
 ntty = 8+1  
 nbuf = 6  
 .if cold / ignored if cold = 0  
 nbuf = 2  
 .endif

core = orig+40000 / specifies beginning of user's core  
 ecore = core+20000 / specifies end of user's core (4096 words)

/ ~~loop~~ 4;4 init by copy  
 / 0;2 unkni;0 bus error  
 / 4;6 fpsym;0 illg in tr  
 / 10;12 unkni;0 / trace and trap (see Sec. B.1 page )  
 / 14;16 unkni;0 / trap  
 / 20;22 panic;0 / pwr  
 / 24;26 rtssym;0 / emt  
 / 30;32 sysent;0 / sys

# UNIX IMPLEMENTATION

```

. = orig+60
60,62 ttyi;240 / interrupt vector tty in ; processor level 5
64,66 ttyo;240 / interrupt vector tty out
70,72 ppti;240 / punch papertape in
74,76 ppto;240 / punch papertape out
100,102 clock;340 / clock interrupt vector ; processor level 7

. = orig+200
/ lpto; 240 line printer interrupt ; processor level 5 (future)

. = orig+204
drum;300 / drum interrupt ; processor level 6

. = orig+214
tape;300 / dec tape interrupt
disk;300 / rk03 interrupt

. = orig+300
0*4+trcv; 240; 0*4+txmt; 240 / dc11 input;output interrupt vectors
1*4+trcv; 240; 1*4+txmt; 240
2*4+trcv; 240; 2*4+txmt; 240
3*4+trcv; 240; 3*4+txmt; 240
4*4+trcv; 240; 4*4+txmt; 240
5*4+trcv; 240; 5*4+txmt; 240
6*4+trcv; 240; 6*4+txmt; 240
7*4+trcv; 240; 7*4+txmt; 240

```

```

. = orig+400
/ copy in transfer vectors

mov    $ecore,sp / put pointer to ecore in the stack pointer
jsr    r0,copyz; 0; 14 / clear locations 0 to 14 in core
mov    $4,r0
clr    r1
mov    r0,(r1)+ / put value of 4 into location 0
mov    r0,(r1)+ / put value of 4 into location 2
mov    $unkni,(r1)+ / put value of unkni into location 4;
                    / time out, bus error
clr    (r1)+ / put value of 0 into location 6
mov    $fpsym,(r1)+ / put value of fpsym into location 10
clr    (r1)+ / put value of 0 into location 12

/ clear core
.if cold / ignored if cold = 0
halt / halt before initializing rf file system; user has
    / last chance to reconsider
.endif

jsr    r0,copyz; systm; ecore / clear locations systm to ecore
mov    $s.chrgt+2,clockp / intialize clockp
/ allocate tty buffers; see H.0 for description
mov    $buffer,r0
mov    $tty+6,r1

1:
mov    r0,(r1)
add    $140.,r0 / tty buffers are 140. bytes long
add    $8,r1
cmp    r1,$tty+[ntty*8] / has a buffer been assigned for each tty
blo    1b

/ allocate disk buffers; see H.0 for description

```

UNIX IMPLEMENTATION

```

1:      mov      $bufp,r1

      mov      r0,(r1)+
      add      $8,r0
      mov      r0,-2(r0)          / bus address
      mov      $-256.,-4(r0)      / word count
      add      $512.,r0          / buffer space
      cmp      r1,$bufp+nbuf+nbuf
      blo     1b
      mov      $sb0,(r1)+        / I/O queue entry drum
      mov      $sb1,(r1)+ / I/O queue entry disk (mounted device)
      mov      $swp,(r1)+ / I/O queue entry core image being swapped
      mov      $[system-inode]\2,sb0+4 / sets up initial buffers per
                                   / format given in

      mov      $system,sb0+6 / memory map
      mov      $-512.,sb1+4
      mov      $mount,sb1+6
      mov      $user,swp+6

/ set devices to interrupt

      mov      $100,$lks / put 100 into clock status register;
                                   / enables clock interrupt

/ set up time out subroutines

      mov      $touts,r0
      mov      $startty,(r0)+ / if toutt = 0 call startty
      mov      $pptito,(r0)+ / if toutt+1 = 0 call pptito
      tst      (r0)+ / add 2 to r0
      mov      $ntty-1,r1

1:      mov      $xmtto,(r0)+ / if toutt+2 thru toutt+2+ntty=0 call xmtto
      dec      r1
      bne     1b

/ free all character blocks; see H.0 for description

      mov      $510.,r2
      mov      $-1,r1

1:      jsr      r0,put
      sub      $2,r2
      bgt     1b

/ set up drum swap addresses; see H.0 for description

      mov      $1024.-64.,r1 / highest drum address; high 64 blks allocated
                                   / to UNIX
      mov      $p.dska,r2 / p.dska contains disk addresses for processes

1:      sub      $17.,r1 / 17 blocks per process
      mov      r1,(r2)+
      cmp      r2,$p.dska+nproc+nproc
      bne     1b

```

UNIX IMPLEMENTATION

/ free rest of drum

```
.if cold
mov    $128.,system / initialize word 1 of drum superblock image;
           / number of bytes in free storage map=128.
mov    $64.,system+2+128. / init. wd 66. of superblock image; # of
           / bytes in i-node map=64.
```

```
1:
dec    r1 / r1=687.,...,34.
jsr    r0,free / free block 'r1', i.e., set bit 'r1' in free
           / storage map in core
cmp    r1,$34. / first drum address not in i list
bgt    1b / if block 34 has been freed, zero i list
```

/ zero i list

```
1:
dec    r0 / r0 = 33.,...,1
jsr    r0,clear / zero block 'r1' on fixed head disk
tst    r1
bgt    1b / if blocks 33.,...,1 have all been zeroed, done.
.endif
```

/ make current program a user

```
mov    $41.,r0 / rootdir set to 41 and never changed
mov    r0,rootdir / rootdir is i-number of root directory
mov    r0,u.cdir / u.cdir is i-number of process current directory
mov    $1,r0
movb   r0,u.uno / set process table index for this process to 1
mov    r0,mpid / initialize mpid to 1
mov    r0,p.pid / p.pid identifies process
movb   r0,p.stat / process status = 1 i.e., active
           /
           / = 0 free
.if cold / = 2 waiting for a child to die
           / = 3 terminated but not yet waited
           / for
```

/ initialize inodes for special files (inodes 1 to 40.)

```
1:
mov    $40.,r1 / set r1=i-node-number 40.
jsr    r0,iget / read i-node 'r1' from disk into inode area of
           / core and write modified inode out (if any)
mov    $100017,i.flgs / set flags in core image of inode to indi-
           / cate allocated, read (owner, non-owner),
           / write (owner, non-owner)
movb   $1,i.nlks / set no. of links = 1
movb   $1,i.uid / set user id of owner = 1
jsr    r0,setimod / set imod=1 to indicate i-node modified, also
           / stuff time of modification into i-node
dec    r1 / next i-node no. = present i-node no.-1
bgt    1b / has i-node 1 been initialized; no, branch
```

/ initialize i-nodes r1.,...,47. and write the root device, binary, etc.,  
/ directories onto fixed head disk. user temporary, initialization prog.

UNIX IMPLEMENTATION

```

mov    $idata,r0 / r0=base addr. of assembled directories.
mov    $u.off,u.fofp / pointer to u.off in u.fofp (holds file
                        / offset)
1:
mov    (r0)+,r1/r1=41.....,47; "0" in the assembled directory
                        / header signals last
beq    1f          / assembled directory has been written onto drum
jsr    r0,imap    / locate the inode map bit for i-node 'r1'
bisb   mq,(r2)    / set the bit to indicate the i-node is not
                        / available
jsr    r0,iget    / read inode 'r1' from disk into inode area of
                        / core and write modified i-node on drum (if any)
mov    (r0)+,i.flgs / set flags in core image of inode from
                        / assembled directories header
movb   (r0)+.i.nlks / set no. of links from header
movb   (r0)+,i.uid  / set user id of owner from header
jsr    r0,setimod  / set imod=1 to indicate inode modified: also,
                        / stuff time of modification into i-node
mov    (r0)+,u.count / set byte count for write call equal to
                        / size of directory
mov    r0,u.base  / set buffer address for write to top of directory
clr    u.off      / clear file offset used in 'seek' and 'tell'
add    u.count,r0 / r0 points to the header of the next directory
jsr    r0,writel  / write the directory and i-node onto drum
br     1b        / do next directory
.endif

/ next 2 instructions not executed during cold boot.
bis    $2000,sb0 / sb0 I/O queue entry for superblock on drum;
                        / set bit 10 to 1
jsr    r0,ppoke  / read drum superblock
1:
tstb   sb0+1    / has I/O request been honored (for drum)?
bne    1b       / no, continue to idle.

1:
decb   sysflg  / normally sysflag=0, indicates executing in system
sys    exec; 2f; 1f / generates trap interrupt; trap vector =
                        / sysent; 0
br     panic   / execute file/etc/init

1:
2f;0
2:
</etc/init\0> / UNIX looks for strings term, noted by nul\0

panic:
clr    ps
1:
dec    $0
bne    1b
dec    $5
bne    1b
jmp    *$173700 / rom loader address

```

*(on cold boot)*  
*— this is file #117 listed on E0, 9 See E0, 10*

UNIX IMPLEMENTATION

```

rtssym:
    mov    r0,-(sp)
    mov    r1,-(sp)
    mov    4(sp),r0
    mov    -(r0),r0
    bic    $!7,r0
    asl    r0
    jmp    *1f(r0)

1:
    Of;1f;2f;3f;4f;5f;badrts;7f
0:
    mov    2(sp),r0
    br     1f

2:
    mov    r2,r1
    br     1f

3:
    mov    r3,r1
    br     1f

4:
    mov    r4,r1
    br     1f

5:
    mov    r5,r1
    br     1f

7:
    mov    8.(sp),r1

1:
    cmp    r1,$score
    blo    badrts
    cmp    r1,$ecore
    bhis   badrts
    bit    $1,r1
    bne    badrts
    tst    (r1)
    beq    badrts
    add    $1f,r0
    mov    r0,4(sp)
    mov    (sp)+,r1
    mov    (sp)+,r0
    rti

1:
    rts    r0
    rts    r1
    rts    r2
    rts    r3
    rts    r4
    rts    r5
    rts    sp
    rts    pc

```

```

badrts:
    mov    (sp)+,r1
    mov    (sp)+,r0

```

rpsym:

```
jmp    unkni
```

```
.if cold
```

```
idata:
```

```
/ root
```

```
41.
140016
.byte 7,1
9f--2
41.
<..\0\0\0\0\0\0>
41.
<.\0\0\0\0\0\0\0>
42.
<dev\0\0\0\0\0>
43.
<bin\0\0\0\0\0>
44.
<etc\0\0\0\0\0>
45.
<usr\0\0\0\0\0>
46.
<tmp\0\0\0\0\0>
```

```
9:
```

```
/ device directory
```

```
42.
140016
.byte 2,1
9f--2
41.
<..\0\0\0\0\0\0>
42.
<.\0\0\0\0\0\0\0>
01.
<tty\0\0\0\0\0>
02.
<ppt\0\0\0\0\0>
03.
<mem\0\0\0\0\0>
04.
<rf0\0\0\0\0\0>
05.
<rk0\0\0\0\0\0>
06.
<tap0\0\0\0\0>
07.
<tap1\0\0\0\0>
08.
<tap2\0\0\0\0>
09.
<tap3\0\0\0\0>
```

UNIX IMPLEMENTATION

10.  
<tap4\0\0\0\0>  
11.  
<tap5\0\0\0\0>  
12.  
<tap6\0\0\0\0>  
13.  
<tap7\0\0\0\0>  
14.  
<tty0\0\0\0\0>  
15.  
<tty1\0\0\0\0>  
16.  
<tty2\0\0\0\0>  
17.  
<tty3\0\0\0\0>  
18.  
<tty4\0\0\0\0>  
19.  
<tty5\0\0\0\0>  
20.  
<tty6\0\0\0\0>  
21.  
<tty7\0\0\0\0>  
22.  
<lpr\0\0\0\0\0>  
01.  
<tty8\0\0\0\0> / really tty

9:

/ binary directory

43.  
140016  
.byte 2,3  
9f--2  
41.  
<..\0\0\0\0\0\0>  
43.  
<.\0\0\0\0\0\0\0>

9:

/ etcetra directory

44.  
140016  
.byte 2,3  
9f--2  
41.  
<..\0\0\0\0\0\0>  
44.  
<.\0\0\0\0\0\0\0>  
47.  
<init\0\0\0\0>

9:

UNIX IMPLEMENTATION

/ user directory

```

45.
140016
.byte 2,1
9f-.-2
41.
<..\0\0\0\0\0\0>
45.
<.\0\0\0\0\0\0\0>

```

9:

/ temporary directory

```

46.
140017
.byte 2,1
9f-.-2
41.
<..\0\0\0\0\0\0>
46.
<.\0\0\0\0\0\0\0>

```

9:

/ initialization program

```

47.
100036
.byte 1,3
9f-.-2

```

8:

```

sys    break; 0
sys    open; 6f-8b+core; 0
mov    r0,r1
sys    seek; 65.; 0

```

1:

```

mov    r1,r0
sys    read; 9f-8b+core; 512.
mov    9f,r5          / size
beq    1f
sys    creat; 9f-8b+core+4; 0
mov    r0,r2
movb   9f+2,0f
sys    chmod; 9f-8b+core+4; 0:..
movb   9f+3,0f
sys    chown; 9f-8b+core+4; 0:..

```

2:

```

tst    r5
beq    2f
mov    r1,r0
sys    read; 9f-8b+core; 512.
mov    $512.,0f
cmp    r5,$512.
bhi    3f
mov    r5,0f

```

3:

UNIX IMPLEMENTATION

```

mov    r2,r0
sys    write; 9f-8b+core; 0:...
sub    r0,r5
br     2b
2:
mov    r2,r0
sys    close
br     1b
1:
mov    r1,r0
sys    close
sys    exec; 5f-8b+core; 4f-8b+core
sys    exit
4:
5f-8b+core; 0
5:
</etcect/init\0>
6:
</dev/tap0\0>
.even
9:
/ end of initialization data
0
.endif

```

*this file #47 is init program that sets up system. <sup>was on sds</sup> It ~~was~~ replaced this init during execution of this init on cold boot!!*

UNIX IMPLEMENTATION

/ u1 -- unix

unkni: / used for all system calls

sysent:

```
incb sysflg / indicate a system routine is
beq 1f / in progress
jmp panic / called if trap inside system
```

1:

```
mov $s.syst+2,clockp
mov r0,-(sp) / save user registers
mov sp,u.r0 / pointer to bottom of users stack in u.r0
mov r1,-(sp)
mov r2,-(sp)
mov r3,-(sp)
mov r4,-(sp)
mov r5,-(sp)
mov ac,-(sp) / "accumulator" register for extended
/ arithmetic unit
mov mq,-(sp) / "multiplier quotient" register for the
/ extended arithmetic unit
mov sc,-(sp) / "step count" register for the extended
/ arithmetic unit
mov sp,u.sp / u.sp points to top of users stack
mov 18.(sp),r0 / store pc in r0
mov -(r0),r0 / sys inst in r0 10400xxx
sub $sys,r0 / get xxx code
asl r0 / multiply by 2 to jump indirect in bytes
cmp r0,$2f-1f / limit of table (35) exceeded
bhis badsys / yes, bad system call
bic $341,20.(sp) / set users processor priority to 0 and clear
/ carry bit
jmp *1f(r0) / jump indirect thru table of addresses
/ to proper system routine.
```

1:

```
sysrele / 0
sysexit / 1
sysork / 2
sysread / 3
syswrite / 4
sysopen / 5
sysclose / 6
syswait / 7
syscreat / 8
syslink / 9
sysunlink / 10
sysexec / 11
syschdir / 12
systeme / 13
sysmkdir / 14
syschmod / 15
syschown / 16
sysbreak / 17
sysstat / 18
sysseek / 19
systemell / 20
```

UNIX IMPLEMENTATION

```

sysmount / 21
sysumount / 22
syssetuid / 23
sysgetuid / 24
sysstime / 25
sysquit / 26
sysintr / 27
sysfstat / 28
sysemt / 29
sysmdate / 30
sysstty / 31
sysgtty / 32
sysilgins / 33

```

2:

error:

```

mov    u.sp,r1
bis    $1,20.(r1) / set c bit in processor status word below
                / users stack

```

sysret:

```

tstb   u.bsys / is a process about to be terminated because
bne    sysexit / of an error? yes, go to sysexit
mov    u.sp,sp / no point stack to users stack
clr    r1 / zero r1 to check last mentioned i-node
jsr    r0,iget / if last mentioned i-node has been modified
                / it is written out
tstb   smod / has the super block been modified
beq    1f / no, 1f
clrb   smod / yes, clear smod
bis    $1000,sb0 / set write bit in I/O queue for super block
                / output
jsr    r0,ppoke / write out modified super block to disk

```

1:

```

tstb   mmod / has the super block for the dismountable file
                / system
beq    1f / been modified? no, 1f
clrb   mmod / yes, clear mmod
movb   mntd,sb1 / set the I/O queue
bis    $1000,sb1 / set write bit in I/O queue for detached sb
jsr    r0,ppoke / write it out to its device

```

1:

```

tstb   uquant / is the time quantum 0?
bne    1f / no, don't swap it out

```

sysrele:

```

jsr    r0,tswap / yes, swap it out

```

1:

```

mov    (sp)+,sc / restore user registers
mov    (sp)+,mq
mov    (sp)+,ac
mov    (sp)+,r5
mov    (sp)+,r4
mov    (sp)+,r3
mov    (sp)+,r2
mov    (sp)+,r1

```

## UNIX IMPLEMENTATION

```

mov    (sp)+,r0
mov    $s.chrgt+2,clockp
decb  sysflg / turn system flag off
jsr    r0,isintr / is there an interrupt from the user
br    intract / yes, output gets flushed, take interrupt
        / action
rti    / no return from interrupt

```

**badsys:**

```

incb  u.bsyz / turn on the user's bad system flag
mov    $3f,u.namep / point u.namep to "core\0\0"
jsr    r0,namei / get the i-number for the core image file
br    1f / error
neg    r1 / negate the i-number to open the core image file
        / for writing
jsr    r0,iopen / open the core image file
jsr    r0,itrunc / free all associated blocks
br    2f

```

**1:**

```

mov    $17,r1 / put i-node mode (17) in r1
jsr    r0,maknod / make an i-node
mov    u.dirbuf,r1 / put i-nodes number in r1

```

**2:**

```

mov    $core,u.base / move address core to u.base
mov    $ecore-core,u.count / put the byte count in u.count
mov    $u.off,u.fofp / move user offset to u.fofp
clr    u.off / clear user offset
jsr    r0,writel / write out the core image to the user
mov    $user,u.base / pt. u.base to user
mov    $64.,u.count / u.count = 64
jsr    r0,writel / write out all the user parameters
neg    r1 / make i-number positive
jsr    r0,iclose / close the core image file
br    sysexit /

```

**3:**

<core\0\0>

**sysexit:** / terminate process

```

clr    u.intr / clear interrupt control word
clr    r1 / clear r1

```

**1:** / r1 has file descriptor (index to u.fp list) Search the whole list

```

jsr    r0,fclose / close all files the process opened
br    .+2 / ignore error return

```

```

inc    r1 / increment file descriptor

```

```

cmp    r1,$10. / end of u.fp list?

```

```

blt    1b / no, go back

```

```

movb   u.uno,r1 / yes, move dying process's number to r1

```

```

clrb   p.stat-1(r1) / free the process

```

```

asl    r1 / use r1 for index into the below tables

```

```

mov    p.pid-2(r1),r3 / move dying process's name to r3

```

```

mov    p.ppid-2(r1),r4 / move its parents name to r4

```

```

clr    r2

```

```

clr    r5 / initialize reg

```

**1:** / find children of this dying process, if they are zombies, free them

```

add    $2,r2 / search parent process table for dying process's name

```

```

cmp    p.ppid-2(r2),r3 / found it?

```

UNIX IMPLEMENTATION

```

bne      3f / no
asr      r2 / yes, it is a parent
cmpb     p.stat-1(r2),$3 / is the child of this dying process a
                        / zombie
bne      2f / no
clrb     p.stat-1(r2) / yes, free the child process
2:
asl      r2
3: / search the process name table for the dying process's parent
cmp      p.pid-2(r2),r4 / found it?
bne      3f / no
mov      r2,r5 / yes, put index to p.pid table (parents
                        / process # x2) in r5
3:
cmp      r2,$nproc+nproc / has whole table been searched?
blt      1b / no, go back
mov      r5,r1 / yes, r1 now has parents process # x2
beq      2f / no parent has been found. The process just dies
asr      r1 / set up index to p.stat
movb     p.stat-1(r1),r2 / move status of parent to r2
beq      2f / if its been freed, 2f
cmp      r2,$3 / is parent a zombie?
beq      2f / yes, 2f
movb     u.uno,r3 / move dying process's number to r3
movb     $3,p.stat-1(r3) / make the process a zombie
cmp      r2,$2 / is the parent waiting for this child to die
bne      2f / yes, notify parent not to wait any more
decb     p.stat-1(r1) / awaken it by putting it (parent)
mov      $runq+4,r2 / on the runq
jsr      r0,putlu
2: / the process dies
clrb     u.uno / put zero as the process number, so "swap" will
jsr      r0,swap / overwrite process with another process
0        / and thereby kill it; halt?

intract: / interrupt action
cmp      *(sp),$rti / are you in a clock interrupt?
bne      1f / no, 1f
cmp      (sp)+,(sp)+ / pop clock pointer
1: / now in user area
mov      r1,-(sp) / save r1
mov      u.ttyp,r1 / pointer to tty buffer in control to r1
cmpb     6(r1),$177 / is the interrupt char equal to "del"
beq      1f / yes, 1f
clrb     6(r1) / no, clear the byte (must be a quit character)
mov      (sp)+,r1 / restore r1
clr      u.quit / clear quit flag
bis      $20,2(sp) / set trace for quit (sets t bit of ps-trace trap)
rti      / return from interrupt
1: / interrupt char = del
clrb     6(r1) / clear the interrupt byte in the buffer
mov      (sp)+,r1 / restore r1
cmp      u.intr,$core / should control be transferred to loc core?
blo      1f
jmp      *u.intr / user to do rti yes, transfer to loc core
1:

```

UNIX IMPLEMENTATION

sys 1 / exit

syswait: / wait for a process to die

```

movb u.uno,r1 / put parents process number in r1
asl r1 / x2 to get index into p.pid table
mov p.pid-2(r1),r1 / get the name of this process
clr r2
clr r3 / initialize reg 3

```

```

1:
add $2,r2 / use r2 for index into p.ppid table / search table
      / of parent processes for this process name
cmp p.ppid-2(r2),r1 / r2 will contain the childs process number
bne 3f / branch if no match of parent process name
inc r3 / yes, a match, r3 indicates number of children
asr r2 / r2/2 to get index to p.stat table
cmpb p.stat-1(r2),$3 / is the child process a zombie?
bne 2f / no, skip it
clrb p.stat-1(r2) / yes, free it
asl r2 / r2x2 to get index into p.pid table
mov p.pid-2(r2),*u.r0 / put childs process name in (u.r0)
br sysret1 / return cause child is dead

```

```

2:
asl r2 / r2x2 to get index into p.ppid table

```

```

3:
cmp r2,$nproc+nproc / have all processes been checked?
blt 1b / no, continue search
tst r3 / one gets here if there are no children or children
      / that are still active
beq error1 / there are no children, error
movb u.uno,r1 / there are children so put parent process number
      / in r1
incb p.stat-1(r1) / it is waiting for other children to die
jsr r0,swap / swap it out, because it's waiting
br syswait / wait on next process

```

```

error1:
jmp error / see 'error' routine

```

```

sysret1:
jmp sysret / see 'sysret' routine

```

sysfork: / create a new process

```

clr r1
1: / search p.stat table for unused process number
inc r1
tstb p.stat-1(r1) / is process active, unused, dead
beq 1f / it's unused so branch
cmp r1,$nproc / all processes checked
blt 1b / no, branch back
add $2,18.(sp) / add 2 to pc when trap occurred, points
      / to old process return
br error1 / no room for new process

```

```

1:
movb u.uno,-(sp) / save parent process number
movb r1,u.uno / set child process number to r1
incb p.stat-1(r1) / set p.stat entry for child process to
      / active status

```

UNIX IMPLEMENTATION

```

mov    u.ttyp,r2 / put pointer to parent process' control tty
        / buffer in r2
beq    2f / branch, if no such tty assigned
clrb   6(r2) / clear interrupt character in tty buffer

2:
mov    $runq+4,r2
jsr    r0,putlu / put child process on lowest priority run queue
asl    r1 / multiply r1 by 2 to get index into p.pid table
inc    mpid / increment m.pid; get a new process name
mov    mpid,p.pid-2(r1) / put new process name in child process'
        / name slot
movb   (sp),r2 / put parent process number in r2
asl    r2 / multiply by 2 to get index into below tables
mov    p.pid-2(r2),r2 / get process name of parent process
mov    r2,p.ppid-2(r1) / put parent process name in parent
        / process slot for child
mov    r2,*u.r0 / put parent process name on stack at location
        / where r0 was saved
mov    $sysret1,(sp) /
mov    sp,u.usp / contents of sp at the time when user is
        / swapped out
mov    $sstack,sp / point sp to swapping stack space
jsr    r0,wswap / put child process out on drum
jsr    r0,unpack / unpack user stack
mov    u.usp,sp / restore user stack pointer
tst    (sp)+ / bump stack pointer
movb   (sp)+,u.uno / put parent process number in u.uno
mov    mpid,*u.r0 / put child process name on stack where r0
        / was saved
add    $2,18.(sp) / add 2 to pc on stack; gives parent
        / process return
clr    r1
1: / search u.fp list to find the files opened by the parent process
movb   u.fp(r1),r2 / get an open file for this process
beq    2f / file has not been opened by parent, so branch
asl    r2 / multiply by 8
asl    r2 / to get index into fsp table
asl    r2
incb   fsp-2(r2) / increment number of processes using file,
        / because child will now be using this file

2:
inc    r1 / get next open file
cmp    r1,$10. / 10. files is the maximum number which can be
        / opened
blt    1b / check next entry
br     sysret1

sysread:
jsr    r0,rw1 / get i-number of file to be read into r1
tst    r1 / negative i-number?
ble    error1 / yes, error 1 to read it should be positive
jsr    r0,readi / read data into core
br     1f

syswrite:
jsr    r0,rw1 / get i-number in r1 of file to write

```

UNIX IMPLEMENTATION

```

tst    r1 / positive i-number ?
bge    error1 / yes, error 1 negative i-number means write
neg    r1 / make it positive
jsr    r0,writel / write data

1:
mov    u.read,*u.r0 / put no. of bytes transferred into (u.r0)
br     sysret1

rw1:
jsr    r0,arg; u.base / get buffer pointer
jsr    r0,arg; u.count / get no. of characters
mov    *u.r0,r1 / put file descriptor (index to u.fp table) in r1
jsr    r0,getf / get i-number of the file in r1
rts    r0

sysopen:
jsr    r0,arg2 / get sys args into u.namep and on stack
jsr    r0,namei / i-number of file in r1
br     error2 / file not found
tst    (sp) / is mode = 0 (2nd arg of call; 0 means, open for read)
beq    1f / yes, leave i-number positive
neg    r1 / open for writing so make i-number negative

1:
jsr    r0,iopen / open file whose i-number is in r1
tst    (sp)+ / pop the stack and test the mode
beq    op1 / is open for read op1

op0:
neg    r1 / make i-number positive if open for writing

op1:
clr    r2 / clear registers
clr    r3

1: / scan the list of entries in fsp table
tstb   u.fp(r2) / test the entry in the u.fp list
beq    1f / if byte in list is 0 branch
inc    r2 / bump r2 so next byte can be checked
cmp    r2,$10. / reached end of list?
blt    1b / no, go back
br     error2 / yes, error (no files open)

1:
tst    fsp(r3) / scan fsp entries
beq    1f / if 0 branch
add    $8.,r3 / add 8 to r3 to bump it to next entry mfsp table
cmp    r3,$[nfiles*8.] / done scanning
blt    1b / no, back
br     error2 / yes, error

1: / r2 has index to u.fp list; r3, has index to fsp table
mov    r1,fsp(r3) / put i-number of open file into next available
mov    cdev,fsp+2(r3) / entry in fsp table, put # of device in
        / next word

clr    fsp+4(r3)
clr    fsp+6(r3) / clear the next two words
asr    r3
asr    r3 / divide by 8 to get number of the fsp entry-1
asr    r3
inc    r3 / add 1 to get fsp entry number

```

UNIX IMPLEMENTATION

```

movb    r3,u.fp(r2) / move entry number into next available slot
          / in u.fp list
mov     r2,*u.r0 / move index to u.fp list into r0 loc on stack
br      sysret2

error2:
jmp     error / see 'error' routine
sysret2:
jmp     sysret / see 'sysret' routine

syscreat: / name; mode
jsr    r0,arg2 / put file name in u.namep put mode on stack
jsr    r0,namei / get the i-number
br     2f / if file doesn't exist 2f
neg    r1 / if file already exists make i-number negative
          / (open for writing)
jsr    r0,iopen /
jsr    r0,itunc / truncate to 0 length
br     op0
2: / file doesn't exist
mov    (sp)+,r1 / put the mode in r1
bic    $!377,r1 / clear upper byte
jsr    r0,maknod / make an i-node for this file
mov    u.dirbuf,r1 / put i-number for this new file in r1
br     op0 / open the file

sysmkdir: / make a directory
jsr    r0,arg2 / point u.namep to the file name
jsr    r0,namei / get the i-number
br     .+4 / if file not found branch around error
br     error2 / directory already exists (error)
tstb   u.uid / is user the super user
bne    error2 / no, not allowed
mov    (sp)+,r1 / put the mode in r1
bic    $!317,r1 / all but su and ex
bis    $40000,r1 / directory flag
jsr    r0,maknod / make the i-node for the directory
br     sysret2 /

sysclose: / close the file
mov    *u.r0,r1 / move index to u.fp list into r1
jsr    r0,fclose / close the file
br     error2 / unknown file descriptor
br     sysret2

sysemt:
jsr    r0,arg; 30 / put the argument of the sysemt call in loc 30
cmp    30,$core / was the argument a lower address than core
blo    1f / yes, rtssym
cmp    30,$ecore / no, was it higher than "core" and less than
          / "ecore"
blo    2f / yes, sysret2
1:
mov    $rtssym,30
2:
br     sysret2

```

# UNIX IMPLEMENTATION

```

sysilgins: / calculate proper illegal instruction trap address
           jsr    r0,arg; 10 / take address from sysilgins call      , put
           / it in loc 8.,
           cmp    10,$score / making it the illegal instruction trap address
           blo    1f / is the address a user core address? yes, go to 2f
           cmp    10,$score
           blo    2f
1:
           mov    $fpsym,10 / no, make 'fpsum' the illegal instruction trap
           / address for the system
2:
           br     sysret2 / return to the caller via 'sysret'

sysmdate: / change the modification time of a file
           jsr    r0,arg; u.namep / point u.namep to the file name
           jsr    r0,namei / get its i-number
           br     error2 / no, such file
           jsr    r0,iget / get i-node into core
           cmpb   u.uid,i.uid / is user same as owner
           beq    1f / yes
           tstb   u.uid / no, is user the super user
           bne    error2 / no, error
1:
           jsr    r0,setimod / fill in modification data, time etc.
           mov    4(sp),i.mtim / move present time to
           mov    2(sp),i.mtim+2 / modification time
           br     sysret2

sysstty: / set mode of typewriter; 3 consecutive word arguments
           jsr    r0,gtty / r1 will have offset to tty block, r2 has source
           mov    r2,-(sp)
           mov    r1,-(sp) / put r1 and r2 on the stack
1: / flush the clist wait till typewriter is quiescent
           mov    (sp),r1 / restore r1 to tty block offset
           movb   tty+3(r1),0f / put cc offset into getc argument
           mov    $240,$sps / set processor priority to 5
           jsr    r0,getc; 0:.. / put character from clist in r1
           br     .+4 / list empty, skip branch
           br     1b / get another character until list is empty
           mov    0b,r1 / move cc offset to r1
           inc    r1 / bump it for output clist
           tstb   cc(r1) / is it 0
           beq    1f / yes, no characters to output
           mov    r1,0f / no, put offset in sleep arg
           jsr    r0,sleep; 0:.. / put tty output process to sleep
           br     1b / try to calm it down again
1:
           mov    (sp)+,r1
           mov    (sp)+,r2 / restore registers
           mov    (r2)+,r3 / put reader control status in r3
           beq    1f / if 0, 1f
           mov    r3,rcsr(r1) / move r.c. status to reader control status
           / register
1:
           mov    (r2)+,r3 / move pointer control status to r3

```

UNIX IMPLEMENTATION

```

1:      beq      1f / if 0 1f
        mov      r3,tcsr(r1) / move p.c. status to printer control status reg

        mov      (r2)+,tty+4(r1) / move to flag byte of tty block
        jmp      sysret2 / return to user

sysgTTY: / get status of typewriter; 3 consecutive word arguments
        jsr      r0,gTTY / r1 will have offset to tty block, r2 has
                / destination
        mov      rcsr(r1),(r2)+ / put reader control status in 1st word
                / of dest
        mov      tcsr(r1),(r2)+ / put printer control status in 2nd word
                / of dest
        mov      tty+4(r1),(r2)+ / put mode in 3rd word
        jmp      sysret2 / return to user

gTTY:
        jsr      r0,arg; u.off / put first arg in u.off
        mov      *u.r0,r1 / put file descriptor in r1
        jsr      r0,getf / get the i-number of the file
        tst      r1 / is it open for reading
        bgt      1f / yes
        neg      r1 / no, i-number is negative, so make it positive

1:      sub      $14.,r1 / get i-number of tty0
        cmp      r1,$nTTY-1 / is there such a typewriter
        bhis     error9 / no, error
        asl      r1 / 0%2
        asl      r1 / 0%4 / yes
        asl      r1 / 0%8 / multiply by 8 so r1 points to tty block
        mov      u.off,r2 / put argument in r2
        rts     r0 / return

```

UNIX IMPLEMENTATION

/ u2 -- unix

```

syslink: / name1, name2
        jsr    r0,arg2 / u.namep has 1st arg u.off has 2nd
        jsr    r0,name1 / find the i-number associated with the 1st
                        / path name
        br     error9 / cannot be found
        jsr    r0,iget / get the i-node into core
        mov    (sp)+,u.namep / u.namep points to 2nd name
        mov    r1,-(sp) / put i-number of name1 on the stack (a link
                        / to this file is to be created)
        mov    cdev,-(sp) / put i-nodes device on the stack
        jsr    r0,isdir / is it a directory
        jsr    r0,name1 / no, get i-number of name2
        br    .+4 / not found so r1=i-number of current directory
                        / ii = i-number of current directory
        br    error9 / file already exists., error
        cmp    (sp)+,cdev / u.dirp now points to end of current dir
        bne    error9
        mov    (sp),u.dirbuf / i-number of name1 into u.dirbuf
        jsr    r0,mkdir / make directory entry for name2 in current
                        / directory
        mov    (sp)+,r1 / r1 has i-number of name1
        jsr    r0,iget / get i-node into core
        incb   i.nlks / add 1 to its number of links
        jsr    r0,setimod / set the i-node modified flag
    
```

```

sysret9:
        jmp    sysret / see 'sysret' routine
    
```

```

error9:
        jmp    error / see 'error' routine
    
```

```

isdir: / if the i-node whose i-number is in r1 is a directory there is an
        / error unless super user made the call
        tstb   u.uid / super user
        beq    1f / yes, don't care
        mov    ii,-(sp) / put current i-number on stack
        jsr    r0,iget / get i-node into core (i-number in r1)
        bit    $40000,i.flgs / is it a directory
        bne    error9 / yes, error
        mov    (sp)+,r1 / no, put current i-number in r1 (ii)
        jsr    r0,iget / get it back in
    
```

```

1:
        rts    r0
    
```

```

sysunlink: / name - remove link name
        jsr    r0,arg; u.namep / u.namep points to name
        jsr    r0,name1 / find the i-number associated with the path name
        br    error9 / not found
        mov    r1,-(sp) / put its i-number on the stack
        jsr    r0,isdir / is it a directory
        clr    u.dirbuf / no, clear the location that will get written
                        / into the i-number portion of the entry
        sub    $10.,u.off / move u.off back 1 directory entry
        jsr    r0,wdir / free the directory entry
    
```

UNIX IMPLEMENTATION

```

mov    (sp)+,r1 / get i-number back
jsr    r0,iget / get i-node
jsr    r0,setimod / set modified flag
decbl i.nlks / decrement the number of links
bgt    sysret9 / if this was not the last link to file return
jsr    r0,anyi / if it was, see if anyone has it open. Then
        / free contents of file and destroy it.
br     sysret9

```

mkdir:

```

jsr    r0,copyz; u.dirbuf+2; u.dirbuf+10. / clear this
mov    u.namep,r2 / r2 points to name of directory entry
mov    $u.dirbuf+2,r3 / r3 points to u.dirbuf+2
1: / put characters in the directory name in u.dirbuf+2 - u.dirbuf+10
movbl (r2)+,r1 / move character in name to r1
beq    1f / if null, done
cmp    r1,$' / / is it a "/?
beq    error9 / yes, error
cmp    r3,$u.dirbuf+10. / have we reached the last slot for
        / a char?
beq    1b / yes, go back
movbl r1,(r3)+ / no, put the char in the u.dirbuf
br     1b / get next char
1:
mov    u.dirp,u.off / pointer to empty current directory slot to
        / u.off

```

wdir:

```

mov    $u.dirbuf,u.base / u.base points to created file name
mov    $10.,u.count / u.count = 10
mov    ii,r1 / r1 has i-number of current directory
jsr    r0,access; 1 / get i-node and set its file up for writing
jsr    r0,writel / write into directory
rts    r0

```

sysexec:

```

jsr    r0,arg2 / arg0 in u.namep,arg1 on top of stack
jsr    r0,namei / namei returns i-number of file named in
        / sysexec call in r1
br     error9
jsr    r0,iget / get i-node for file to be executed
bit    $20,i.flgs / is file executable
beq    error9
jsr    r0,iopen / gets i-node for file with i-number given in
        / r1 (opens file)
bit    $40,i.flgs / test user id on execution bit
beq    1f
tstbl u.uid / test user id
beq    1f / super user
movbl i.uid,u.uid / put user id of owner of file as process
        / user id
1:
mov    (sp)+,r5 / r5 now contains address of list of pointers to
        / arguments to be passed
mov    $1,u.quit / u.quit determines handling of quits;
        / u.quit = 1 take quit

```

UNIX IMPLEMENTATION

```

mov    $1,u.intr / u.intr determines handling of interrupts;
        / u.intr = 1 take interrupt
mov    $rtssym,*30 / emt trap vector set to take system routine
mov    $fpsym,*10 / reserved instruction trap vector set to take
        / system routine
mov    $sstack,sp / stack space used during swapping
mov    r5,-(sp) / save arguments pointer on stack
mov    $ecore,r5 / r5 has end of core
mov    $core,r4 / r4 has start of users core
mov    r4,u.base / u.base has start of users core
mov    (sp),r2 / move arguments list pointer into r2
1:
    tst    (r2)+ / argument char = "nul"
    bne    1b
    tst    -(r2) / decrement r2 by 2; r2 has addr of end of argument
        / pointer list
1: / move arguments to bottom of users core
    mov    -(r2),r3 / (r3) last non zero argument ptr
    cmp    r2,(sp) / is r2 = beginning of argument ptr list
    blo    1f / branch to 1f when all arguments are moved
2:
    tstb   (r3)+
    bne    2b / scan argument for \0 (nul)
2:
    movb   -(r3),-(r5) / move argument char by char starting at
        / ecore
    cmp    r3,(r2) / moved all characters in this argument
    bhi    2b / branch 2b if not
    mov    r5,(r4)+ / move r5 into top of users core; r5 has
        / pointer to nth arg
    br     1b / string
1:
    clrb   -(r5)
    bic    $1,r5 / make r5 even, r5 points to last word of argument
        / strings
    mov    $core,r2
1: / move argument pointers into core following argument strings
    cmp    r2,r4
    bhis   1f / branch to 1f when all pointers are moved
    mov    (r2)+,-(r5)
    br     1b
1:
    sub    $core,r4 / gives number of arguments *2
    asr    r4 / divide r4 by 2 to calculate the number of args stored
    mov    r4,-(r5) / save number of arguments ahead of the argument
        / pointers
    clr    -(r5) / popped into ps when rti in sysrele is executed
    mov    $core,-(r5) / popped into pc when rti in sysrele
        / is executed
    mov    r5,0f / load second copyz argument
    tst    -(r5) / decrement r5
    mov    r5,u.r0 /
    sub    $16.,r5 / skip 8 words
    mov    r5,u.sp / assign user stack pointer value, effectively
        / zeroes all regs when sysrele is executed
    jsr    r0,copyz; core; 0:0 / zero user's core

```

# UNIX IMPLEMENTATION

```

clr      u.break
mov      r5,sp / point sp to user's stack
mov      $14,u.count
mov      $u.off,u.fofp
clr      u.off / set offset in file to be read to zero
jsr      r0,readi / read in first six words of user's file, starting
           / at $core
mov      sp,r5 / put users stack address in r5
sub      $core+40.,r5 / subtract $core +40, from r5 (leaves
           / number of words less 26 available for
           / program in user core

mov      r5,u.count /
cmp      core,$405 / br .+14 is first instruction if file is
           / standard a.out format
bne      1f / branch, if not standard format
mov      core+2,r5 / put 2nd word of users program in r5; number of
           / bytes in program text
sub      $14,r5 / subtract 12
cmp      r5,u.count /
bgt      1f / branch if r5 greater than u.count
mov      r5,u.count
jsr      r0,readi / read in rest of user's program text
add      core+10,u.nread / add size of user data area to u.nread
br       2f

1:      jsr      r0,readi / read in rest of file

2:      mov      u.nread,u.break / set users program break to end of
           / user code
add      $core+14,u.break / plus data area
jsr      r0,iclose / does nothing
br       sysret3 / return to core image at $core

sysfstat: / set status of open file
jsr      r0,arg; u.off / put buffer address in u.off
mov      u.off,-(sp) / put buffer address on the stack
mov      *u.r0,r1 / put file descriptor in r1
jsr      r0,getf / get the files i-number
tst      r1 / is it 0?
beq      error3 / yes, error
bgt      1f / if i-number is negative (open for writing)
neg      r1 / make it positive, then branch
br       1f / to 1f

sysstat: / ; name of file; buffer - get files status
jsr      r0,arg2 / get the 2 arguments
jsr      r0,name1 / get the i-number for the file
br       error3 / no such file, error

1:      jsr      r0,iget / get the i-node into core
mov      (sp)+,r3 / move u.off to r3 (points to buffer)
mov      r1,(r3)+ / put i-number in 1st word of buffer
mov      $inode,r2 / r2 points to i-node

1:      mov      (r2)+,(r3)+ / move rest of i-node to buffer
cmp      r2,$inode+32 / done?

```

UNIX IMPLEMENTATION

```

    bne    1b / no, go back
    br     sysret3 / return through sysret

error3:
    jmp    error / see 'error' routine
sysret3:
    jmp    sysret / see 'sysret' routine

getf: / get the device number and the i-number of an open file
    cmp    r1,$10. / user limited to 10 open files
    bhis   error3 / u.fop is table of users open files, index in
           / fsp table
    movb   u.fop(r1),r1 / r1 contains number of entry in fsp table
    beq    1f / if its zero, return
    asl    r1
    asl    r1 / multiply by 8 to get index into fsp table entry
    add    $fsp-4,r1 / r1 is pointing at the 3rd word in the fsp entry
    mov    r1,u.fofp / save address of 3rd word in fsp entry in u.fofp
    mov    -(r1),cdev / remove the device number cdev
    mov    -(r1),r1 / and the i-number r1

1:
    rts    r0

namei:
    mov    u.cdir,r1 / put the i-number of current directory in r1
    mov    u.cdev,cdev / device number for users directory into cdev
    cmpb   *u.namep,$' / is first char in file name a /
    bne    1f
    inc    u.namep / go to next char
    mov    rootdir,r1 / put i-number of rootdirectory in r1
    clr    cdev / clear device number

1:
    tstb   *u.namep / is the character in file name a nul
    beq    nig / yes, end of file name reached; branch to "nig"

1:
    jsr    r0,access; 2 / get i-node with i-number r1
    bit    $40000,i.flgs / directory i-node?
    beq    error3 / no, got an error
    mov    i.size,u.dirp / put size of directory in u.dirp
    clr    u.off / u.off is file offset used by user
    mov    $u.off,u.fofp / u.fofp is a pointer to the offset portion
           / of fsp entry

2:
    mov    $u.dirbuf,u.base / u.dirbuf holds a file name copied from
           / a directory
    mov    $10.,u.count / u.count is byte count for reads and writes
    jsr    r0,readi / read 10. bytes of file with i-number (r1);
           / i.e. read a directory entry
    tst    u.nread
    ble    nib / gives error return
    tst    u.dirbuf /
    bne    3f / branch when active directory entry (i-node word in
           / entry non zero)
    mov    u.off,u.dirp
    sub    $10.,u.dirp

```

UNIX IMPLEMENTATION

```

br      2b
3:     mov      u.namep,r2 / u.namep points into a file name string
      mov      $u.dirbuf+2,r3 / points to file name of directory entry
3:     movb     (r2)+,r4 / move a character from u.namep string into r4
      beq      3f / if char is nul, then the last char in string has been
           / moved
      cmp      r4,$' / / is char a </>
      beq      3f
      cmp      r3,$u.dirbuf+10. / have I checked all 8 bytes of file name
      beq      3b
      cmpb    (r3)+,r4 / compare char in u.namep string to file name
           / char read from
      beq      3b / directory; branch if chars match
      br      2b / file names do not match go to next directory entry
3:     cmp      r3,$u.dirbuf+10. / if equal all 8 bytes were matched
      beq      3f
      tstb    (r3)+ /
      bne     2b
3:     mov      r2,u.namep / u.namep points to char following a / or nul
      mov      u.dirbuf,r1 / move i-node number in directory entry to r1
      tst      r4 / if r4 = 0 the end of file name reached, if r4 = </>
           / then go to next directory
      bne     1b

nig:   tst      (r0)+ / gives non-error return
nib:   rts      r0

syschdir: / makes the directory specified in the argument the current
           / directory
      jsr      r0,arg; u.namep / u.namep points to path name
      jsr      r0,name1 / find its i-number
      br      error3
      jsr      r0,access; 2 / get i-node into core
      bit     $40000,i.flgs / is it a directory?
      beq     error3 / no error
      mov     r1,u.cdir / move i-number to users current directory
      mov     cdev,u.cdev / move its device to users current device
      br      sysret3

isown: jsr      r0,arg2 / u.namep points to file name
      jsr      r0,name1 / get its i-number
      br      error3
      jsr      r0,iget / get i-node into core
      tstb    u.uid / super user?
      beq     1f / yes, branch
      cmpb    i.uid,u.uid / no, is this the owner of the file
      beq     1f / yes
      jmp     error3 / no, error
1:

```

UNIX IMPLEMENTATION

```

jsr    r0,setimod / indicates i-node has been modified
mov    (sp)+,r2 / mode is put in r2 (u.off put on stack with
           / 2nd arg)
rts    r0

```

```

syschmod: / name; mode
jsr    r0,isown / get the i-node and check user status
bit    $40000,i.flgs / directory?
beq    2f / no
bic    $60,r2 / su & ex / yes, clear set user id and
           / executable modes

```

```

2:
movb   r2,i.flgs / move remaining mode to i.flgs
br     1f

```

```

syschown: / name; owner
jsr    r0,isown / get the i-node and check user status
tstb   u.uid / super user
beq    2f / yes, 2f
bit    $40,i.flgs / no, set user id on execution?
bne    3f / yes error, could create Trojan Horses

```

```

2:
movb   r2,i.uid / no, put the new owners id in the i-node
1:
jmp    sysret4
3:
jmp    error

```

```

arg:
mov    u.sp,r1
mov    *18.(r1),*(r0)+ / put argument of system call into
           / argument of arg2 or rwi
add    $2,18.(r1) / point pc on stack to next system argument
rts    r0

```

```

arg2:
jsr    r0,arg; u.namep / u.namep contains value of first arg in
           / sys call
jsr    r0,arg; u.off / u.off contains value of second arg in
           / sys call
mov    r0,r1 / r0 points to calling routine
mov    (sp),r0 / put operation code back in r0
mov    u.off,(sp) / put pointer to second argument on stack
jmp    (r1) / return to calling routine

```

```

systime: / get time of year
mov    s.time,4(sp)
mov    s.time+2,2(sp) / put the present time on the stack
br     sysret4

```

```

sysstime: / set time
tstb   u.uid / is user the super user
bne    error4 / no, error
mov    4(sp),s.time
mov    2(sp),s.time+2 / set the system time
br     sysret4

```

```

sysbreak: / set the program break
    mov    u.break,r1 / move users break point to r1
    cmp    r1,$core / is it the same or lower than core?
    blos   1f / yes, 1f
    cmp    r1,sp / is it the same or higher than the stack?
    bhis   1f / yes, 1f
    bit    $1,r1 / is it an odd address
    beq    2f / no, its even
    clrb   (r1)+ / yes, make it even
2: / clear area between the break point and the stack
    cmp    r1,sp / is it higher or same than the stack
    bhis   1f / yes, quit
    clr    (r1)+ / clear word
    br     2b / go back
1:
    jsr    r0,arg; u.break / put the "address" in u.break (set new
    / break point)
    br     sysret4 / br sysret

maknod: / r1 contains the mode
    bis    $100000,r1 / allocate flag set
    mov    r1,-(sp) / put mode on stack
    mov    i1,r1 / move current i-number to r1
    jsr    r0,access; 1 / get its i-node into core
    mov    r1,-(sp) / put i-number on stack
    mov    $40.,r1 / r1 = 40
1: / scan for a free i-node (next 4 instructions)
    inc    r1 / r1 = r1+1
    jsr    r0,imap / get byte address and bit position in inode map in
    / r2 & m
    bitb   mq,(r2) / is the i-node active
    bne    1b / yes, try the next one
    bisb   mq,(r2) / no, make it active (put a 1 in the bit map)
    jsr    r0,iget / get i-node into core
    tst    i.flgs / is i-node already allocated
    blt    1b / yes, look for another one
    mov    r1,u.dirbuf / no, put i-number in u.dirbuf
    mov    (sp)+,r1 / get current i-number back
    jsr    r0,iget / get i-node in core
    jsr    r0,mkdir / make a directory entry in current directory
    mov    u.dirbuf,r1 / r1 = new inode number
    jsr    r0,iget / get it into core
    jsr    r0,copyz; inode; inode+32. / 0 it out
    mov    (sp)+,i.flgs / fill flags
    movb   u.uid,i.uid / user id
    movb   $1,i.nlks / 1 link
    mov    s.time,i.ctim / time created
    mov    s.time+2,i.ctim+2 / time modified
    jsr    r0,setimod / set modified flag
    rts    r0 / return

sysseek: / moves read write pointer in an fsp entry
    jsr    r0,seektell / get proper value in u.count
    add    u.base,u.count / add u.base to it
    mov    u.count,*u.fofp / put result into r/w pointer

```

UNIX IMPLEMENTATION

```

        br      sysret4

sysstell: / get the r/w pointer
        jsr    r0,seektell
        br     error4

error4:
        jmp    error / see 'error' routine
sysret4:
        jmp    sysret / see 'sysret' routine

seektell:
        jsr    r0,arg; u.base / puts offset in u.base
        jsr    r0,arg; u.count / put ptr name in u.count
        mov    *u.r0,r1 / file descriptor in r1 (index in u.fp list)
        jsr    r0,getf / u.fofp points to 3rd word in fsp entry
        mov    r1,-(sp) / r1 has i-number of file, put it on the stack
        beq    error4 / if i-number is 0, not active so error
        bgt    .+4 / if its positive jump
        neg    r1 / if not make it positive
        jsr    r0,iget / get its i-node into core
        cmp    u.count,$1 / is ptr name =1
        blt    2f / no its zero
        beq    1f / yes its 1
        mov    i.size,u.count / put number of bytes in file in u.count
        br     2f
1: / ptr name =1
        mov    *u.fofp,u.count / put offset in u.count
2: / ptrname =0
        mov    (sp)+,r1 / i-number on stack r1
        rts    r0

sysintr: / set interrupt handling
        jsr    r0,arg; u.intr / put the argument in u.intr
        br     1f / go into quit routine
sysquit: jsr    r0,arg; u.quit / put argument in u.quit
1:
        mov    u.ttyp,r1 / move pointer to control tty buffer to r1
        beq    sysret4 / return to user
        clrb   6(r1) / clear the interrupt character in the tty buffer
        br     sysret4 / return to user

syssetuid: / set process id
        movb   *u.r0,r1 / move process id (number) to r1
        cmpb   r1,u.ruid / is it equal to the real user id number
        beq    1f / yes
        tskb   u.uid / no, is current user the super user?
        bne    error4 / no, error
1:
        movb   r1,u.uid / put process id in u.uid
        movb   r1,u.ruid / put process id in u.ruid
        br     sysret4 / system return

sysgetuid:
        movb   u.ruid,*u.r0 / move the real user id to (u.r0)
        br     sysret4 / system return, sysret

```

UNIX IMPLEMENTATION

```

fclose:
    mov     r1,-(sp) / put r1 on the stack (it contains the index
                / to u.fp list)
    jsr     r0,getf / r1 contains i-number, cdev has device =, u.fofp
                / points to 3rd word of fsp entry
    tst     r1 / is inumber 0?
    beq     1f / yes, i-node not active so return
    tst     (r0)+ / no, jump over error return
    mov     r1,r2 / move i-number to r2
    mov     (sp),r1 / restore value of r1 from the stack which is
                / index to u.fp
    clrb   u.fp(r1) / clear that entry in the u.fp list
    mov     u.fofp,r1 / r1 points to 3rd word in fsp entry
    decb   2(r1) / decrement the number of processes that have opened
                / the file
    bge     1f / if all processes haven't closed the file, return
    mov     r2,-(sp) / put r2 on the stack (i-number)
    clr     -4(r1) / clear 1st word of fsp entry
    tstb   3(r1) / has this file been deleted
    beq     2f / no, branch
    mov     r2,r1 / yes, put i-number back into r1
    jsr     r0,anyi / free all blocks related to i-number
                / check if file appears in fsp again

2:
    mov     (sp)+,r1 / put i-number back into r1
    jsr     r0,iclose / check to see if its a special file

1:
    mov     (sp)+,r1 / put index to u.fp back into r1
    rts     r0

anyi: / r1 contains an i-number
    mov     $fsp,r2 / move start of fsp table to r2

1:
    cmp     r1,(r2) / do i-numbers match?
    beq     1f / yes, 1f
    neg     r1 / no complement r1
    cmp     r1,(r2) / do they match now?
    beq     1f / yes, transfer
                / i-numbers do not match
    add     $8,r2 / no, bump to next entry in fsp table
    cmp     r2,$fsp+[nfiles*8] / are we at last entry in the table
    blt     1b / no, check next entries i-number
    tst     r1 / yes, no match
    bge     .+4
    neg     r1 / make i-number positive
    jsr     r0,imap / get address of allocation bit in the i-map in r2
    bicb   mq,(r2) / clear bit for i-node in the imap
    jsr     r0,itunc / free all blocks related to i-node
    clr     i.flgs / clear all flags in the i-node
    rts     r0 / return

1: / i-numbers match
    incb   7(r2) / increment upper byte of the 4th word
    rts     r0 / in that fsp entry (deleted flag of fsp entry)

```

UNIX IMPLEMENTATION

/ u3 -- unix

tswap:

```

movb    u.uno,r1 / move users process number to r1
mov     $runq+4,r2 / move lowest priority queue address to r2
jsr    r0,putlu / create link from last user on Q to u.uno's user

```

swap:

```

mov     $300,$sps / processor priority = 6
mov     $runq,r2 / r2 points to runq table
1: / search runq table for highest priority process
tst     (r2)+ / are there any processes to run in this Q entry
bne    1f / yes, process 1f
cmp     r2,$runq+6 / if zero compare address to end of table
bne    1b / if not at end, go back
jsr    r0,idle; s.idlet+2 / wait for interrupt; all queues
                               / are empty
br     swap

```

1:

```

tst     -(r2) / restore pointer to right Q entry
mov     r2,u.pri / set present user to this run queue
movb   (r2)+,r1 / move 1st process in queue to r1
cmpb   r1,(r2)+ / is there only 1 process in this Q to be run
beq    1f / yes
tst     -(r2) / no, pt r2 back to this Q entry
movb   p.link-1(r1),(r2) / move next process in line into
                               / run queue
br     2f

```

1:

```

clr     -(r2) / zero the entry; no processes on the Q

```

2: / write out core to appropriate disk area and read in new process if  
/ required

```

clr     *$sps / clear processor status
cmpb   r1,u.uno / is this process the same as the process in core?
beq    2f / yes, don't have to swap
mov     r0,-(sp) / no, write out core; save r0 (address in routine
                               / that called swap)
mov     sp,u.usp / save stack pointer
mov     $sstack,sp / move swap stack pointer to the stack pointer
mov     r1,-(sp) / put r1 (new process #) on the stack
tstb   u.uno / is the process # = 0
beq    1f / yes, kill process by overwriting
jsr    r0,wswap / write out core to disk

```

1:

```

mov     (sp)+,r1 / restore r1 to new process number
jsr    r0,rswap / read new process into core
jsr    r0,unpack / unpack the users stack from next to his program
                               / to its normal
mov     u.usp,sp / location; restore stack pointer to new process
                               / stack
mov     (sp)+,r0 / put address of where the process that just got
                               / swapped in, left off., i.e., transfer control
                               / to new process

```

2:

```

movb   $30.,uquant / initialize process time quantum
rts    r0 / return

```

UNIX IMPLEMENTATION

wswap:

```

mov    *$30,u.emt / determines handling of emts
mov    *$10,u.ilgins / determines handling of illegal instructions
mov    u.break,r2 / put process program break address in r2
inc    r2 / add 1 to it
bic    $1,r2 / make it even
mov    r2,u.break / set break to an even location
mov    u.usp,r3 / put users stack pter at moment of swap in r3
cmp    r2,$score / is u.break less than $score
blos   2f / yes
cmp    r2,r3 / no, is (u.break) greater than stack pointer
bhis   2f / yes

```

1:

```

mov    (r3)+,(r2)+ / no, pack stack next to users program
cmp    r3,$score / has stack reached end of core
bne    1b / no, keep packing
br     1f / yes

```

2:

```

mov    $score,r2 / put end of core in r2

```

1:

```

sub    $user,r2 / get number of bytes to write out (user up
              / to end of stack gets written out)
neg    r2 / make it negative
asr    r2 / change bytes to words (divide by 2)
mov    r2,swp+4 / word count
movb   u.uno,r1 / move user process number to r1
asl    r1 / x2 for index
mov    r2,p.break-2(r1) / put negative of word count into the
              / p.break table
mov    p.dska-2(r1),r1 / move disk address of swap area for
              / process to r1
mov    r1,swp+2 / put processes dska address in swp +2 (block
              / number)
bis    $1000,swp / set it up to write (set bit 9)
jsr    r0,ppoke / write process out on swap area of disk

```

1:

```

tstb   swp+1 / is it done writing?
bne    1b / no, wait
rts    r0 / yes, return to swap

```

rswap:

```

asl    r1 / process number x2 for index
mov    p.break-2(r1), swp+4 / word count
mov    p.dska-2(r1),swp+2 / disk address
bis    $2000,swp / read
jsr    r0,ppoke / read it in

```

1:

```

tstb   swp+1 / done
bne    1b / no, wait for bit 15 to clear (inhibit bit)
mov    u.emt,*$30 / yes move these
mov    u.ilgins,*$10 / back
rts    r0 / return

```

```

unpack: / move stack back to its normal place
mov    u.break,r2 / r2 points to end of user program

```

UNIX IMPLEMENTATION

```

cmp      r2,$score / at beginning of user program yet?
blos    2f / yes, return
cmp      r2,u.usp / is break above the "stack pointer before
          / swapping"
bhis    2f / yes, return
mov      $score,r3 / r3 points to end of core
add      r3,r2
sub      u.usp,r2 / end of users stack is in r2
1:
mov      -(r2),-(r3) / move stack back to its normal place
cmp      r2,u.break / in core
bne     1b
2:
rts      r0

putlu: / r1 = user process no.; r2 points to lowest priority queue
tstb    (r2)+ / is queue empty?
beq     1f / yes, branch
movb    (r2),r3 / no, save the "last user" process number in r3
movb    r1,p.link-1(r3) / put pointer to user on "last users" link
br      2f /
1:
movb    r1,-1(r2) / user is only user; put process no. at beginning
          / and at end
2:
movb    r1,(r2) / user process in r1 is now the last entry on
          / the queue
dec     r2 / restore r2
rts     r0

copyz:
mov      r1,-(sp) / put r1 on stack
mov      r2,-(sp) / put r2 on stack
mov      (r0)+,r1
mov      (r0)+,r2
1:
clr     (r1)+ / clear all locations between r1 and r2
cmp     r1,r2
blo     1b
mov     (sp)+,r2 / restore r2
mov     (sp)+,r1 / restore r1
rts     r0

idle:
mov      *$ps,-(sp) / save ps on stack
clr     *$ps / clear ps
mov      clockp,-(sp) / save clockp on stack
mov      (r0)+,clockp / arg to idle in clockp
1 / wait for interrupt
mov     (sp)+,clockp / restore clockp, ps
mov     (sp)+,*$ps
rts     r0

clear:
jsr     r0,wslot / get an I/O buffer set bits 9 and 15 in first
          / word of I/O queue r5 points to first data word

```

UNIX IMPLEMENTATION

```
1:      mov      $256.,r3      / in buffer
      clr      (r5)+ / zero data word in buffer
      dec      r3
      bgt      1b / branch until all data words in buffer are zero
      jsr      r0,dskwr / write zeroed buffer area out onto physical
                        / block specified
      rts      r0 / in r1
```

UNIX IMPLEMENTATION

/ u4 -- unix

setisp:

```

mov    r1,-(sp)
mov    r2,-(sp)
mov    r3,-(sp)
mov    clockp,-(sp)
mov    $s.syst+2,clockp
jmp    (r0)

```

clock: / interrupt from 60 cycle clock

```

mov    r0,-(sp) / save r0
tst    *$lks / restart clock?
mov    $s.time+2,r0 / increment the time of day
inc    (r0)
bne    1f
inc    -(r0)

```

1:

```

mov    clockp,r0 / increment appropriate time category
inc    (r0)
bne    1f
inc    -(r0)

```

1:

```

mov    $uquant,r0 / decrement user time quantum
dec    (r0)
bge    1f / if less than 0
clrb   (r0) / make it 0

```

1: / decrement time out counts return now if priority was not 0

```

cmp    4(sp),$200 / ps greater than or equal to 200
bge    2f / yes, check time outs
tstb   (r0) / no, user timed out?
bnc    1f / no
cmpb   sysflg,$-1 / yes, are we outside the system?
bne    1f / no, 1f
mov    (sp)+,r0 / yes, put users r0 in r0
sys    0 / sysrele
rti

```

2: / priority is high so just decrement time out counts

```

mov    $toutt,r0 / r0 points to beginning of time out table

```

2:

```

tstb   (r0) / is the time out?
beq    3f / yes, 3f (get next entry)
dec    (r0) / no, decrement the time
bne    3f / isit zero now?
incb   (r0) / yes, increment the time

```

3:

```

inc    r0 / next entry
cmp    r0,$touts / end of toutt table?
blo    2b / no, check this entry
mov    (sp)+,r0 / yes, restore r0
rti    / return from interrupt

```

1: / decrement time out counts; if 0 call subroutine

```

mov    (sp)+,r0 / restore r0
mov    $240,*$ps / set processor priority to 5
jsr    r0,setisp / save registers

```

UNIX IMPLEMENTATION

```

mov      $touts-toutt-1,r0 / set up r0 as index to decrement thru
                          / the table
1:
tstb    toutt(r0) / is the time out for this entry
beq     2f / yes
decb    toutt(r0) / no, decrement the time
bne     2f / is the time 0, now
asl     r0 / yes, 2 x r0 to get word index for tout entry
jsr     r0,*touts(r0) / go to appropriate routine specified in this
asr     r0 / touts entry; set r0 back to toutt index
2:
dec     r0 / set up r0 for next entry
bge     1b / finished? , no, go back
br      retisp / yes, restore registers and do a rti

ttyi: / console tty input interrupt routine
jsr     r0,setisp / save reg r1, r2, r3
mov     *$tkb,r1 / r1 = char in tty reader buffer
inc     *$tkb / set the reader enable bit
bic     $!177,r1 / clear upper 9 bits of the character (strip off
                / 8th bit of char)
cmp     r1,$'a-40 / is character upper case A,..., upper case Z.
                / note that
blt     1f / lower case a is represented by 141, upper case by
cmp     r1,$'z-40 / 101; and lower case z by 172, upper
                / case Z by 132.
bgt     1f / if not upper case, branch
add     $40,r1 / if upper case, calculate the representation of its
                / lower case counter part
1:
cmp     r1,$175 / char = "]"? Note: may be quit char (fs)
beq     2f / yes 2f
cmp     r1,$177 / char = "del"?
beq     2f / yes, 2f
jsr     r0,putc; 0 / put char in r1 on clist entry
br      1f
movb    r1,ttyoch / put char in ttyoch
jsr     r0,starttty / load char in tty output data buffer
cmp     r1,$4 / r1 = "eot"
beq     1f / yes, 1f
cmp     r1,$12 / r1 = "lf"
beq     1f / yes 1f
cmpb    cc+0,$15. / are there less than 15 chars on the input list
blo     1:
jsr     r0,wakeup; runq; 0 / no, wakeup the input process
br      retisp / return
2: / r1 = "]" or "delete" to get here
mov     tty+[ntty*8]-8+6,r2 / move console tty buffer address to r2
beq     2f / if 0, wakeall
movb    r1,6(r2) / move "]" or del into "interrupt char"
                / byte of buffer
2:
jsr     r0,wakeall / wakeup all sleeping processes
br      retisp / return

```

UNIX IMPLEMENTATION

```

wakeall:
    mov    $39.,0f / fill arg2 of wakeup call with 39
1:
    jsr    r0,wakeup; runq+4; 0:.. / wakeup the processes in the
    dec    0b / wait list; decrement arg2
    bge    1b / if not done, go back
    rts    r0

ttyo: / console typewriter output interrupt routine
    jsr    r0,setisp / save registers
    jsr    r0,startty / put a char onthe console tty output buffer register
    br     retisp / restore registers

retisp:
    mov    (sp)+,clockp / pop values before interrupt off the stack
    mov    (sp)+,r3
    mov    (sp)+,r2
    mov    (sp)+,r1
    mov    (sp)+,r0
    rti    / return from interrupt

ppti: / paper tape input interrupt routine
    jsr    r0,setisp / save registers
    movb   pptiflg,r1 / place "pptiflg" in r1
    jmp    *1f(r1) / jump to location specified by value of "pptiflg"
1:
    retisp / file not open
    1f / file just opened
    2f / file normal
    retisp / file not closed

1: / file just opened
    tstb   $sprs+1 / is error bit set in prs
    bge    1f / no
    jsr    r0,pptito / place 10 in toutt entry for ppt input
    br     retisp

1:
    movb   $4,pptiflg / change "pptiflg" to indicate file "normal"
2:
    jsr    r0,wakeup; runq+2; 2 / wakeup process for ppt input entry
    / in wlist
    tstb   $sprs+1 / is error bit set
    blt    1f / yes
    mov    $sprb,r1 / place contents ppt read buffer in r1
    jsr    r0,putc; 2 / place character in clist area for ppt input
    br     .+2 / temp / if no space in clist character lost
    cmpb   cc+2,$50. / character count in clist area for ppt input
    / greater than or equal to 50
    bhis   retisp / yes
    inc    $sprs / no, set reader enable bit in prs
    br     retisp

1:
    movb   $6,pptiflg / set pptiflg to 6 to indicate error bit set
    br     retisp

```

/lpto:

UNIX IMPLEMENTATION

```

/      jsr    r0,setisp
/      jsr    r0,starlpt
/      br     retisp

```

```

ppto: / paper tape output interrupt routine
      jsr    r0,setisp / save registers
      jsr    r0,starppt / get next character from clist, and output
                        / if possible
      br     retisp / pop register values from stack

```

```

/starlpt:
/      cmpb   cc+5.,$100.
/      bhi    1f
/      jsr    r0,wakeup; runq+2; 5
/1:
/      tstb   *$lps
/      bge    1f
/      jsr    r0,getc; 5
/      br     1f
/      mov    r1,*$lps
/      br     starlpt
/1:
/      rts    r0

```

```

startty: / start or restart console tty output
      cmpb   cc+1,$5.
      bhi    1f / branch to 1f when character count on tty (? input,
                / output) list is greater than 5.
      jsr    r0,wakeup; runq+2; 1
1:
      tstb   *$tps / test console output ready bit
      bge    2f / branch if ready bit is clear
      tstb   toutt+0 / is toutt for console a zero
      bne    2f / if not; branch to 2f
      movb   ttyoch,r1 / put character to be output in r1
      bne    1f
      jsr    r0,getc; 1 / if char is nul, get a char from console
                        / output list
      br     2f / if console output list is empty, branch to 2f
1:
      clrb   ttyoch
      mov    r1,*$tpb / put character in console output register
      cmp    r1,$12 / is char a line feed
      bne    1f
      movb   $15,ttyoch / put a cr in ttyoch
1:
      cmp    r1,$11 / char = ht
      bne    1f
      movb   $15.,toutt+0 / set time out to 15 clock tics
1:
      cmp    r1,$15 / char = cr
      bne    2f
      movb   $15.,toutt+0 / set time out to 15 clock ticks
2:
      rts    r0

```

UNIX IMPLEMENTATION

```

pptito: / paper tape input tous subrouting
        cmpb  pptiflg,$2 / does "pptiflg" indicate file just opened
        bne  1f / no, do nothing
        movb  $10.,toutt+1 / yes, place 10 in tout entry for ppt tty input
        tstb  *$prsr+1 / is error bit set
        blt  1f / yes, return
        inc  *$prsr / no, set read enable bit
1:
        rts   r0

starppt: / start ppt output
        cmpb  cc+3,$10. / is character count for ppt output greater
                / than 10.
        bhi  1f / yes, branch
        jsr  r0,wakeup; runq+2; 3 / no, wakeup process in wlist
                / entry for ppt input
1:
        tstb  *$ppsr / is ready bit set in punch status word
        bge  1f / no, branch
        jsr  r0,getc; 3 / yes, get next char in clist for pptout and
                / place in r1
        br  1f / if none, branch
        mov  r1,*$ppsb / place character in ppt buffer
1:
        rts   r0

wakeup: / wakeup processes waiting for an event by linking them to the
        / queue
        mov  r1,-(sp) / put char on stack
        mov  (r0)+,r2 / r2 points to a queue
        mov  (r0)+,r3 / r3 = wait channel number
        movb wlist(r3),r1 / r1 contains process number in that wait
                / channel that was sleeping
        beq  2f / if 0 return, nothing to wakeup
        cmp  r2,u.pri / is runq greater than or equal to users process
                / priority
        bhis 1f / yes, don't set time quantum to zero
        clrb quant / time quantum = 0
1:
        clrb wlist(r3) / zero wait channel entry
        jsr  r0,putlu / create a link from the last user on the Q
                / to this process number that got woken
2:
        mov  (sp)+,r1 / restore r1
        rts   r0

sleep: / wait for event
        jsr  r0,isintr / check to see if interrupt or quit from user
                br 2f / something happened / yes, his interrupt so return
                / to user
        mov  (r0)+,r1 / put number of wait channel in r1
        movb wlist(r1),-(sp) / put old process number in there, on
                / the stack
        movb u.uno,wlist(r1) / put process number of process to put
                / to sleep in there
        mov  cdev,-(sp) / nothing happened in isintr so

```

UNIX IMPLEMENTATION

```

jsr    r0,swap / swap out process that needs to sleep
mov    (sp)+,cdev / restore device
jsr    r0,isintr / check for interrupt of new process
br     2f / yes, return to new user
movb   (sp)+,r1 / no, r1 = old process number that was originally
        / on the wait channel
beq    1f / if 0 branch
mov    $runc+4,r2 / r2 points to lowest priority queue
mov    $300,*$ps / processor priority = 6
jsr    r0,putlu / create link to old process number
clr    *$ps / clear the status; process priority = 0
1:
rts    r0 / return
2:
jmp    sysret / return to user

isintr:
mov    r1,-(sp) / put number of wait channel on the stack
mov    r2,-(sp) / save r2
mov    u.ttyp,r1 / r1 = pointer to buffer of process control
        / typewriter
beq    1f / if 0, do nothing except skip return
movb   6(r1),r1 / put interrupt char in the tty buffer in r1
beq    1f / if its 0 do nothing except skip return
cmp    r1,$177 / is interrupt char = delete?
bne    3f / no, so it must be a quit (fs)
tst    u.intr / yes, value of u.intr determines handling
        / of interrupts
bne    2f / if not 0, 2f. If zero do nothing.
1:
tst    (r0)+ / bump r0 past system return (skip)
4:
mov    (sp)+,r2 / restore r1 and r2
mov    (sp)+,r1
rts    r0
3: / interrupt char = quit (fs)
tst    u.quit / value of u.quit determines handling of quits
beq    1b / u.quit = 0 means do nothing
2: / get here because either u.intr ≠ 0 or u.quit ≠ 0
mov    $tty+6,r1 / move pointer to tty block into r1
1: / find process control tty entry in tty block
cmp    (r1),u.ttyp / is this the process control tty buffer?
beq    1f / block found go to 1f
add    $8,r1 / look at next tty block
cmp    r1,$tty+[ntty*8]+6 / are we at end of tty blocks
blo    1b / no
br     4b / no process control tty found so go to 4b
1:
mov    $240,*$ps / set processor priority to 5
movb   -3(r1),0f / load getc call argument; character list
        / identifier
inc    0f / increment
1:
jsr    r0,getc; 0:... / erase output char list for control
br     4b / process tty. This prevents a line of stuff
        / being typed out after you hit the interrupt

```

br      1b      / key

UNIX IMPLEMENTATION

/ u5 -- unix

mget:

```

mov    *u.fofp,mq / file offset in mq
clr    ac / later to be high sig
mov    $-8,lsh / divide ac/mq by 256.
mov    mq,r2
bit    $10000,i.flgs / lg/sm is this a large or small file
bne    4f / branch for large file
bit    $!17,r2
bne    3f / branch if r2r2 greater than or equal to 16
bic    $!16,r2 / clear all bits but bits 1,2,3
mov    i.dskp(r2),r1 / r1 has physical block number
bne    2f / if physical block num is zero then need a new block
        / for file
jsr    r0,alloc / allocate a new block
mov    r1,i.dskp(r2) / physical block number stored in i-node
jsr    r0,setimod / set inode modified byte (imod)
jsr    r0,clear / zero out disk/drum block just allocated

```

2:

```

rts    r0

```

```

3: / adding on block which changes small file to a large file
jsr    r0,alloc / allocate a new block for this file; block number
        / in r1
jsr    r0,wslot / set up I/O buffer for write, r5 points to first
        / data word in buffer
mov    $8.,r3 / next 6 instructions transfer old physical block
        / pointers
mov    $i.dskp,r2 / into new indirect block for the new large file

```

1:

```

mov    (r2),(r5)+
clr    (r2)+
dec    r3
bgt    1b
mov    $256.-8.,r3 / clear rest of data buffer

```

1:

```

clr    (r5)+
dec    r3
bgt    1b
jsr    r0,dskwr / write new indirect block on disk
mov    r1,i.dskp / put pointer to indirect block in i-node
bis    $10000,i.flgs / set large file bit in i.flgs word of i-node
jsr    r0,setimod / set i-node modified flag
br     mget

```

4: / large file

```

mov    $-8,lsh / divide byte number by 256.
bic    $!776,r2 / zero all bits but 1,2,3,4,5,6,7,8; gives offset
        / in indirect block
mov    r2,-(sp) / save on stack
mov    mq,r2 / calculate offset in i-node for pointer to proper
        / indirect block
bic    $!16,r2
mov    i.dskp(r2),r1
bne    2f / if no indirect block exists
jsr    r0,alloc / allocate a new block

```

UNIX IMPLEMENTATION

```

mov    r1,i.dskp(r2) / put block number of new block in i-node
jsr    r0,setimod / set i-node modified byte
jsr    r0,clear / clear new block
2:
jsr    r0,dskrd / read in indirect block
mov    (sp)+,r2 / get offset
mov    r1,-(sp) / save block number of indirect block on stack
add    r5,r2 / r5 points to first word in indirect block, r2
        / points to location of inter
mov    (r2),r1 / put physical block no of block in file
        / sought in r1
bne    2f / if no block exists
jsr    r0,alloc / allocate a new block
mov    r1,(r2) / put new block number into proper location in
        / indirect block
mov    (sp)+,r1 / get block number of indirect block
mov    (r2),-(sp) / save block number of new block
jsr    r0,wslot
jsr    r0,dskwr / write newly modified indirect block back out
        / on disk
mov    (sp),r1 / restore block number of new block
jsr    r0,clear / clear new block
2:
tst    (sp)+ / bump stack pointer
rts    r0

alloc:
mov    r2,-(sp) / save r2, r3 on stack
mov    r3,-(sp)
mov    $system,r2 / start of inode and free storage map for drum
tst    cdev
beq    1f / drum is device
mov    $mount,r2 / disk or tape is device, start of inode and free
        / storage map
1:
mov    (r2)+,r1 / first word contains number of bytes in free
        / storage map
asl    r1 / multiply r1 by eight gives, number of blocks in device
asl    r1
asl    r1
mov    r1,-(sp) / save # of blocks in device on stack
clr    r1 / r1 contains bit count of free storage map
1:
mov    (r2)+,r3 / word of free storage map in r3
bne    1f / branch if any free blocks in this word
add    $16.,r1
cmp    r1,(sp) / have we examined all free storage bytes
blo    1b
jmp    panic / found no free storage
1:
asr    r3 / find a free block
bcs    1f / branch when free block found; bit for block k is in
        / byte k/8 / in bit k (mod 8)
inc    r1 / increment bit count in bit k (mod8)
br     1b
1:

```

UNIX IMPLEMENTATION

```
tst    (sp)+ / bump sp
jsr    r0,3f / have found a free block
bic    r3,(r2) / set bit for this block i.e. assign block
br     2f
```

free:

```
mov    r2,-(sp) / save r2, r3
mov    r3,-(sp)
jsr    r0,3f / set up bit mask and word no. in free storage map
        / for block
bis    r3,(r2) / set free storage block bit; indicates free block
```

2:

```
mov    (sp)+,r3 / restore r2, r3
mov    (sp)+,r2
tst    cdev / cdev = 0, block structured, drum; cdev = 1
        / mountable device
bne    1f
incb   smod / set super block modified for drum
rts    r0
```

1:

```
incb   mmod / set super block modified for mountable device
rts    r0
```

3:

```
mov    r1,r2 / block number, k, = 1
bic    $!7,r2 / clear all bits but 0,1,2; r2 = (k) mod (8)
clr    r3
bisb   2f(r2),r3 / use mask to set bit in r3 corresponding to
        / (k) mod 8
mov    r1,r2 / divide block number by 16
asr    r2
asr    r2
asr    r2
asr    r2
bcc    1f / branch if bit 3 in r1 was 0 i.e., bit for block is in
        / lower half of word
swab   r3 / swap bytes in r3; bit in upper half of word in free
        / storage map
```

1:

```
asl    r2 / multiply block number by 2; r2 = k/8
add    $system+2,r2 / address of word of free storage map for drum
        / with block bit in it
tst    cdev
beq    1f / cdev = 0 indicates device is drum
add    $mount-system,r2 / address of word of free storage map for
        / mountable device with bit of block to be
        / freed
```

1:

```
rts    r0 / return to 'free'
```

2:

```
.byte 1,2,4,10,20,40,100,200 / masks for bits 0,...,7
```

access:

```
jsr    r0,iget / read in i-node for current directory (i-number
        / passed in r1)
mov    i.flgs,r2
```

UNIX IMPLEMENTATION

```

cmpb    i.uid,u.uid / is user same as owner of file
bne     1f / no, then branch
asrb    r2 / shift owner read write bits into non owner
        / read/write bits
asrb    r2
1:
bit     r2,(r0)+ / test read-write flags against argument in
        / access call
bne     1f
tstb    u.uid
beq     1f
jmp     error
1:
rts     r0

setimod:
movb    $1,imod / set current i-node modified bytes
mov     s.time,i.mtim / put present time into file modified time
mov     s.time+2,i.mtim+2
rts     r0

imap: / get the byte that has the allocation bit for the i-number contained
      / in r1
mov     $1,mq / put 1 in the mq
mov     r1,r2 / r2 now has i-number whose byte in the map we
        / must find
sub     $41.,r2 / r2 has i-41
mov     r2,r3 / r3 has i-41
bic     $17,r3 / r3 has (i-41) mod 8 to get the bit position
mov     r3,lsh / move the 1 over (i-41) mod 8 positions to the left
        / to mask the correct bit
asr     r2
asr     r2
asr     r2 / r2 has (i-41) base 8 of the byte no. from the start of
        / the map
mov     r2,-(sp) / put (i-41) base 8 on the stack
mov     $system,r2 / r2 points to the in-core image of the super
        / block for drum
tst     cdev / is the device the disk
beq     1f / yes
add     $mount-system,r2 / for mounted device, r2 points to 1st word
        / of its super block
1:
add     (r2)+,(sp) / get byte address of allocation bit
add     (sp)+,r2 / ?
add     $2,r2 / ?
rts     r0

iget:
cmp     r1,ii / r1 = i-number of current file
bne     1f
cmp     idev,cdev / is device number of i-node = current device
beq     2f
1:
tstb    imod / has i-node of current file been modified i.e.,
        / imod set

```

UNIX IMPLEMENTATION

```

beq      1f
clrb    imod / if it has, we must write the new i-node out on disk
mov     r1,-(sp)
mov     cdev,-(sp)
mov     ii,r1
mov     idev,cdev
jsr     r0,icalc; 1
mov     (sp)+,cdev
mov     (sp)+,r1

1:
tst     r1 / is new i-number non zero
beq     2f / branch if r1=0
tst     cdev / is the current device number non zero (i.e., device
        / ≠ drum)
bne     1f / branch if cdev ≠ 0
cmp     r1,mnti / mnti is the i-number of the cross device
        / file (root directory of mounted device)
bne     1f
mov     mntd,cdev / make mounted device the current device
mov     rootdir,r1

1:
mov     r1,ii
mov     cdev,idev
jsr     r0,icalc; 0 / read in i-node ii

2:
mov     ii,r1
rts     r0

icalc: / i-node i is located in block (i+31.)/16. and begins 32.*
        / (i+31)mod16 bytes from its start
add     $31.,r1 / add 31. to i-number
mov     r1,-(sp) / save i+31. on stack
asr     r1 / divide by 16.
asr     r1
asr     r1
asr     r1 / r1 contains block number of block in which
        / i-node exists
jsr     r0,dskrd / read in block containing i-node i.
tst     (r0)
beq     1f / branch to wslot when argument in icalc call = 1
jsr     r0,wslot / set up data buffer for write (will be same buffer
        / as dskrd got)

1:
bic     $!17,(sp) / zero all but last 4 bits; gives (i+31.) mod 16
mov     (sp)+,mq / calculate offset in data buffer; 32.*(i+31.)mod16
mov     $5,lsh / for i-node i.
add     mq,r5 / r5 points to first word in i-node i.
mov     $inode,r1 / inode is address of first word of current i-node
mov     $!16.,r3
tst     (r0)+ / branch to 2f when argument in icalc call = 0
beq     2f / r0 now contains proper return address for rts r0

1:
mov     (r1)+,(r5)+ / over write old i-node
dec     r3
bgt     1b
jsr     r0,dskwr / write inode out on device

```

UNIX IMPLEMENTATION

```

rts      r0
2:
mov      (r5)+,(r1)+ / read new i-node into "inode" area of core
dec      r3
bgt      2b
rts      r0

itrunc:
jsr      r0,iaget
mov      $i.dskp,r2 / address of block pointers in r2
1:
mov      (r2)+,r1 / move physical block number into r1
beq      5f
mov      r2,-(sp)
bit      $10000,i.flgs / test large file bit?
beq      4f / if clear, branch
mov      r1,-(sp) / save block number of indirect block
jsr      r0,dskrd / read in block, 1st data word pointed to by r5
mov      $256.,r3 / move word count into r3
2:
mov      (r5)+,r1 / put 1st data word in r1; physical block number
beq      3f / branch if zero
mov      r3,-(sp) / save r3, r5 on stack
mov      r5,-(sp)
jsr      r0,free / free block in free storage map
mov      (sp)+,r5
mov      (sp)+,r3
3:
dec      r3 / decrement word count
bgt      2b / branch if positive
mov      (sp)+,r1 / put physical block number of indirect block
4:
jsr      r0,free / free indirect block
mov      (sp)+,r2
5:
cmp      r2,$i.dskp+16.
bne      1b / branch until all i.dskp entries checked
bic      $10000,i.flgs / clear large file bit
clr      i.size / zero file size
jsr      r0,copyz; i.dskp; i.dskp+16. / zero block pointers
jsr      r0,setimod / set i-node modified flag
mov      ii,r1
rts      r0

```

UNIX IMPLEMENTATION

/ u6 -- unix

read1:

clr u.nread / accumulates number of bytes transmitted  
 tst u.count / is number of bytes to be read greater than 0  
 bgt 1f / yes, branch  
 rts r0 / no, nothing to read; return to caller

1:

mov r1,-(sp) / save i-number on stack  
 cmp r1,\$40. / want to read a special file (i-nodes 1,...,40 are  
 / for special files)  
 ble 1f / yes, branch  
 jmp dskr / no, jmp to dskr; read file with i-node number (r1)  
 / starting at byte ((u.fofp)), read in u.count bytes

1:

asl r1 / multiply inode number by 2  
 jmp \*1f-2(r1)

1:

rtty / tty; r1=2  
 rppt / ppt; r1=4  
 rmem / mem; r1=6  
 rrf0 / rf0  
 rrk0 / rk0  
 rtap / tap0  
 rtap / tap1  
 rtap / tap2  
 rtap / tap3  
 rtap / tap4  
 rtap / tap5  
 rtap / tap6  
 rtap / tap7  
 rcvt / tty0  
 rcvt / tty1  
 rcvt / tty2  
 rcvt / tty3  
 rcvt / tty4  
 rcvt / tty5  
 rcvt / tty6  
 rcvt / tty7  
 rcrd/ crd

rtty: / read from console tty

mov tty+[8\*ntty]-8+6,r5 / r5 is the address of the 4th word of  
 / of the control and status block  
 tst 2(r5) / for the console tty; this word points to the console  
 / tty buffer  
 bne 1f / 2nd word of console tty buffer contains number  
 / of chars. Is this number non-zero?  
 jsr r0,canon; ttych / if 0, call 'canon' to get a line  
 / (120 chars.)

1:

tst 2(r5) / is the number of characters zero  
 beq ret1 / yes, return to caller via 'ret1'  
 movb \*4(r5),r1 / no, put character in r1  
 inc 4(r5) / 3rd word of console tty buffer points to byte which  
 / contains the next char.

UNIX IMPLEMENTATION

```

dec    2(r5) / decrement the character count
jsr    r0,passc / move the character to core (user)
br     1b / get next character

```

```

ret1:  jmp    ret / return to caller via 'ret'

```

```

rppt: / read paper tape
jsr    r0,pptic / gets next character in clist for ppt input and
           / places
br     ret / it in r1; if there is no problem with reader, it
           / also enables read bit in prs
jsr    r0,passc / place character in users buffer area
br     rppt

```

```

rmem: / transfer characters from memory to a user area of core
mov     *u.fofp,r1 / save file offset which points to the char to
           / be transferred to user
inc     *u.fofp / increment file offset to point to 'next' char in
           / memory file
movb    (r1),r1 / get character from memory file, put it in r1
jsr     r0,passc / move this character to the next byte of the
           / users core area
br     rmem / continue

```

```

1:
rcrd:  jmp     error / see 'error' routine

```

```

dskr:  mov     (sp),r1 / i-number in r1
jsr     r0,iget / get i-node (r1) into i-node section of core
mov     i.size,r2 / file size in bytes in r2
sub     *u.fofp,r2 / subtract file offset
blos    ret
cmp     r2,u.count / are enough bytes left in file to carry out read
bhis    1f
mov     r2,u.count / no, just read to end of file

```

```

1:
jsr     r0,mget / returns physical block number of block in file
           / where offset points
jsr     r0,dskrd / read in block, r5 points to 1st word of data in
           / buffer
jsr     r0,sioreg

```

```

2:
movb    (r2)+,(r1)+ / move data from buffer into working core
           / starting at u.base
dec     r3
bne     2b / branch until proper number of bytes are transferred
tst     u.count / all bytes read off disk
bne     dskr
br     ret

```

```

passc: movb    r1,*u.base / move a character to the next byte of the
           / users buffer
inc     u.base / increment the pointer to point to the next byte

```

UNIX IMPLEMENTATION

```

                                / in users buffer
inc    u.nread / increment the number of bytes read
dec    u.count / decrement the number of bytes to be read
bne    1f / any more bytes to read?; yes, branch
mov    (sp)+,r0 / no, do a non-local return to the caller of
                                / 'readi' by;

ret: / (1) pop the return address off the stack into r0
      mov    (sp)+,r1 / (2) pop the i-number off the stack into r1
1:
      clr    *$ps / clear processor status
      rts    r0 / return to address currently on top of stack

writei:
      clr    u.nread / clear the number of bytes transmitted during
                                / read or write calls
      tst    u.count / test the byte count specified by the user
      bgt    1f / any bytes to output; yes, branch
      rts    r0 / no, return - no writing to do

1:
      mov    r1,-(sp) / save the i-node number on the stack
      cmp    r1,$40. / does the i-node number indicate a special file?
      bgt    dskw / no, branch to standard file output
      asl    r1 / yes, calculate the index into the special file
      jmp    *1f-2(r1) / jump table and jump to the appropriate routine

1:
      wtty   / tty
      wppt   / ppt
      wmem   / mem
      wrf0   / rf0
      wrk0   / rk0
      wtap   / tap0
      wtap   / tap1
      wtap   / tap2
      wtap   / tap3
      wtap   / tap4
      wtap   / tap5
      wtap   / tap6
      wtap   / tap7
      xmtt   / tty0
      xmtt   / tty1
      xmtt   / tty2
      smtt   / tty3
      xmtt   / tty4
      xmtt   / tty5
      xmtt   / tty6
      xmtt   / tty7
/
      wlpr  / lpr

wttty:
      jsr    r0,cpass / get next character from user buffer area; if
                                / none go to return address in syswrite
      tst    r1 / is character = null
      beq    wtty / yes, get next character

1:
      mov    $240,*$ps / no, set processor priority to five

```

UNIX IMPLEMENTATION

```

cmpb    cc+1,$20. / is character count for console tty greater
          / than 20
bhis    2f / yes; branch to put process to sleep
jsr     r0,putc; 1 / find place in freelist to assign to console
          / tty and
br      2f / place character in list; if none available
          / branch to put process to sleep
jsr     r0,startty / attempt to output character on tty
br      wtty

2:
mov     r1,-(sp) / place character on stack
jsr     r0,sleep; 1 / put process to sleep
mov     (sp)+,r1 / remove character from stack
br      1b / try again to place character in clist and output

wppt:
jsr     r0,cpass / get next character from user buffer area,
          / if none return to writei's calling routine
jsr     r0,pptoc / output character on ppt
br      wppt

/wlpr:
/      jsr     r0,cpass
/      cmp     r0,$'a
/      blo    1f
/      cmp     r1,$'z
/      bhi    1f
/      sub    $40,r1
/1:
/      jsr     r0,lptoc
/      br     wlpr

wmem: / transfer characters from a user area of core to memory file
jsr     r0,cpass / get next character from users area of core and
          / put it in r1
mov     r1,-(sp) / put character on the stack
mov     *u.fofp,r1 / save file offset in r1
inc     *u.fofp / increment file offset to point to next available
          / location in file
movb    (sp)+,(r1) / pop char off stack, put in memory loc assigned
          / to it
br      wmem / continue

1:
jmp     error / ?

dskw: / write routine for non-special files
mov     (sp),r1 / get an i-node number from the stack into r1
jsr     r0,iget / write i-node out (if modified), read i-node 'r1'
          / into i-node area of core
mov     *u.fofp,r2 / put the file offset [(u.off) or the offset in
          / the fsp entry for this file] in r2
add     u.count,r2 / no. of bytes to be written + file offset is
          / put in r2
cmp     r2,i.size / is this greater than the present size of
          / the file?
blos    1f / no, branch

```

UNIX IMPLEMENTATION

```

mov    r2,i.size / yes, increase the file size to file offset +
        / no. of data bytes
jsr    r0, settimod / set imod=1 (i.e., core inode has been
        / modified), stuff time of modification into
        / core image of i-node

1:
jsr    r0,mget / get the block no. in which to write the next data
        / byte
bit    *u.fofp,$777 / test the lower 9 bits of the file offset
bne    2f / if its non-zero, branch; if zero, file offset = 0,
        / 512, 1024,...(i.e., start of new block)
cmp    u.count,$512. / if zero, is there enough data to fill an
        / entire block? (i.e., no. of
bhis   3f / bytes to be written greater than 512.? Yes, branch.
        / Don't have to read block

2: / in as no past info. is to be saved (the entire block will be
    / overwritten).
jsr    r0,dskrd / no, must retain old info.. Hence, read block 'r1'
        / into an I/O buffer

3:
jsr    r0,wslot / set write and inhibit bits in I/O queue, proc.
        / status=0, r5 points to 1st word of data
jsr    r0,sioreg / r3 = no. of bytes of data, r1 = address of data,
        / r2 points to location in buffer in which to
        / start writing data

2:
movb   (r1)+,(r2)+ / transfer a byte of data to the I/O buffer
dec    r3 / decrement no. of bytes to be written
bne    2b / have all bytes been transferred? No, branch
jsr    r0,dskwr / yes, write the block and the i-node
tst    u.count / any more data to write?
bne    1b / yes, branch
jmp    ret / no, return to the caller via 'ret'

cpass: / get next character from user area of core and put it in r1
tst    u.count / have all the characters been transferred (i.e.,
        / u.count, # of chars. left
beq    1f / to be transferred = 0?) yes, branch
dec    u.count / no, decrement u.count
movb   *u.base,r1 / take the character pointed to by u.base and
        / put it in r1
inc    u.nread / increment no. of bytes transferred
inc    u.base / increment the buffer address to point to the
rts    r0 / next byte

1:
mov    (sp)+,r0 / put return address of calling routine into r0
mov    (sp)+,r1 / i-number in r1
rts    r0 / non-local return

sioreg:
mov    *u.fofp,r2 / file offset (in bytes) is moved to r2
mov    r2,r3 / and also to r3
bis    $177000,r3 / set bits 9,...,15. of file offset in r3
bic    $1777,r2 / calculate file offset mod 512.
add    r5,r2 / r2 now points to 1st byte in system buffer where
        / data is to be placed

```

# UNIX IMPLEMENTATION

```

mov    u.base,r1 / address of data is in r1
neg    r3 / 512 - file offset (mod512.) in r3 (i.e., the number
        / of free bytes in the file block
cmp    r3,u.count / compare this with the number of data bytes to
        / be written to the file
blos   2f / if less than branch. Use the number of free bytes
        / in the file block as the number to be written
mov    u.count,r3 / if greater than, use the number of data bytes
        / as the number to be written

```

2:

```

add    r3,u.nread / r3 + number of bytes xmitted during write is
        / put into u.nread
sub    r3,u.count / u.count = no. of bytes that still must be
        / written or read
add    r3,u.base / u.base points to the 1st of the remaining data
        / bytes
add    r3,*u.fofp / new file offset = number of bytes done + old
        / file offset
rts    r0

```

UNIX IMPLEMENTATION

/ u7 -- unix

canon:

```

mov    r5,r1 / move tty buffer address to r1
add    $10.,r1 / add 10 to get start of data
mov    r1,4(r5) / canp = 10(r5) / move buffer addr + 10 to 3rd
        / word in buffer (char. pointer)
clr    2(r5) / ncan / clear 2nd word in buffer, 0 char. count

```

1:

```

jsr    r0,*(r0) / jump to arg get char off Q of characters, sleep
        / if none
jsr    r0,cesc; 100 / test for @ (kill line)
br     canon / character was @ so start over
jsr    r0,cesc; 43 / test for # (erase last char. typed)
br     1b / character was #, go back
cmp    r0,$4 / is char eot?
beq    1f / yes, reset and return
movb   r1,*4(r5) / no, move char to address in 3rd word of buffer
        / (char. pointer)
inc    2(r5) / increment 2nd word (char. count)
inc    4(r5) / increment 3rd word (char. pointer)
cmp    r1,$'\n' / is char = newline
beq    1f / yes, 1f
cmp    2(r5),$120. / is byte count greater than or equal to 120
bhis   1f / yes, 1f
br     1b / no, get another char off the Q

```

1: / get here if line is full, a new line has been received or an eot  
/ has been received

```

mov    r5,r1 / move buffer address to r1
add    $10.,r1 / add 10
mov    r1,4(r5) / canp = 10(r5) / reset char pointer
tst    (r0)+ / skip over argument
rts    r0 / return

```

cesc: / test for erase or kill char

```

cmp    r1,(r0)+ / char in r1 = erase or kill character?
bne    1f / no, skip return
tst    2(r5) / yes, is char. count = 0
beq    2f / yes, don't skip return
dec    2(r5) / no, decrement char count
dec    4(r5) / decrement character pointer
cmpb   *4(r5),$'\\' / was previous character a "\"
bne    2f / no, don't skip

```

1:

```

tst    (r0)+ / yes, skip

```

2:

```

rts    r0 / return

```

ttych: / get characters from Q of characters inputted <sup>from</sup> to tty

```

mov    $240,*$ps / set processor priority to 5
jsr    r0,getc; 0 / takes char. off clist and puts it in r1
br     1f / list is empty, go to sleep
clr    *$ps / clear process priority
rts    r0 / return

```

1: / list is empty

UNIX IMPLEMENTATION

```

mov    r5,-(sp) / save r5
jsr    r0,sleep; 0 / put process to sleep in input wait channel
mov    (sp)+,r5 / restore r5
br     ttych / try again

```

```

pptic: / paper tape input control
mov    $240,$$ps / set processor priority to five
cmpb   cc+2,$30. / is character count for paper tape input in
        / clist greater than or equal to 30
bhis   1f / yes, branch
bit    *$prs,$104200 / is there either an error, an unread char
        / in buffer, or reader busy
bne    1f / yes, don't enable reader
inc    *$prs / set reader enable bit

1:
jsr    r0,getc; 2 / get next character in clist for ppt input and
br     1f / place in r1; if no char in clist for ppt input
        / branch
tst    (r0)+ / pop stack so that return will be four locations past
        / subroutine call

2:
clr    $$ps / set process priority equal to zero
rts    r0 / return

1:
cmpb   pptiflg,$6 / does pptiflg indicate file "not closed"
beq    2b / yes, return to calling routine at instruction
        / immediately following jsr
jsr    r0,sleep; 2 / no, all characters to be read in not yet in
        / clist, put process to sleep
br     pptic

```

```

pptoc: / paper tape output control
mov    $240,$$ps / set processor priority to five
cmpb   cc+3,$50. / is character count for paper tape output in
        / clist greater than or equal to 50
bhis   1f / yes
jsr    r0,putc; 3 / find place in freelist to assign ppt output
        / and place
br     1f / character in list; if none available branch to put
        / process to sleep
jsr    r0,starppt / try to output character
clr    $$ps / clear processor priority
rts    r0 / return

1:
mov    r1,-(sp) / place character on stack
jsr    r0,sleep; 3 / put process to sleep
mov    (sp)+,r1 / place character in r1
br     pptoc / try again to place character in clist and output

```

```

/lptoc: / line printer output control
/      mov    $240,$$ps / set processor priority to five
/      cmpb   cc+5,$200. / is character count for printer greater than or
/                / equal to 200
/      bhis   1f / yes
/      jsr    r0,putc; 5 / find place in freelist to assign to printer
/                / and place

```

UNIX IMPLEMENTATION

```

        br 1f / char in list, if none available branch to put
        / process to sleep
/      jsr   r0,starlpt / try to output character
/      clr   *$ps / set processor priority = 0
/      rts   r0 / return
/1:
/      mov   r1,-(sp) / place character on stack
/      jsr   r0,sleep; 5 / put process to sleep
/      mov   (sp)+,r1 / place character on stack
/      br    lptoc

getc: / get a character off character list
      mov   (r0)+,r1 / put argument in getc call in r1 (char list id)
      jsr   r0,get
      br 1f / empty char list return
      decb  cc(r1) / decrement number of char in char list
      mov   $-1,r1 / load minus 1 in r1
      jsr   r0,put / put char back on free list
      movb  clist-2(r2),r1 / put char in r1
      tst   (r0)+ / bump r0 for non blank char list return
1:
      rts   r0

putc:
      mov   r1,-(sp) / save char on stack
      mov   $-1,r1 / put free list list id in r1
      jsr   r0,get / take char off free list / clist slot taken
      / identified by r2
      br 1f / branch when no chars in free list
      mov   (r0)+,r1 / put putc call arg in r1 (i.e., list identifier)
      incb  cc(r1) / increment character count for list (r1)
      jsr   r0,put / put clist entry on list
      movb  (sp),clist-2(r2) / put character in new entry
1:
      tst   (r0)+
      mov   (sp)+,r1
      rts   r0

get:
      movb  cf+1(r1),r2 / move current first char offset to r2
      beq   2f / no characters in char list
      tst   (r0)+ / bump r0, second return
      cmpb  r2,cl+1(r1) / r2 equal to last char offset
      beq   1f / yes, (i.e., entire char list scanned), branch to 1f
      bic   $!377,r2 / clear bits 8-15 in r2
      asl   r2 / multiply r2 by 2 to get offset in clist
      movb  clist-1(r2),cf+1(r1) / move next char in list pointer to
      / first char offset ptr
      br    2f
1:
      clrb  cf+1(r1) / clear first char clist offset
      clrb  cl+1(r1) / clear last char clist offset
      bic   $!377,r2 / zero top half of r2
      asl   r2 / multiply r2 by 2
2:
      rts   r0

```

UNIX IMPLEMENTATION

```

put:      r2
asr      r0 / divide r2 by 2; r2 is offset in clist
mov      r2,-(sp) / save r2 on stack
movb     cl+1(r1),r2 / move offset of last char in list (r1) into r2
beq      1f / offset = 0 then go to 1f (i.e., start a new list)
bic      $!377,r2 / zero top half of r2
asl      r2 / multiply offset by 2, r2 now has offset in clist
movb     (sp),clist-1(r2) / link new list entry to current last
                               / entry in list (r1)

br       2f

1:      movb     (sp),cf+1(r1) / put new list entry offset into first char
                               / offset of list (r1)

2:      mov      (sp)+,r2 / pop stack into r2; offset of new list
                               / entry in r2
movb     r2,cl+1(r1) / make new list entry the last entry in list
                               / (r1)
asl      r2 / multiply r2 by 2; r2 has clist offset for new
                               / list entry
rts      r0

iopen:  / open file whose i-number is in r1
tst      r1 / write or read access?
blt      2f / write, go to 2f
jsr      r0,access; 2 / get inode into core with read access
cmp      r1,$40. / is it a special file
bgt      3f / no, 3f
mov      r1,-(sp) / yes, figure out
asl      r1
jmp      *1f-2(r1) / which one and transfer to it

1:      otty     / tty
oppt     / ppt
sret     / mem
sret     / rf0
sret     / rk0
sret     / tap0
sret     / tap1
sret     / tap2
sret     / tap3
sret     / tap4
sret     / tap5
sret     / tap6
sret     / tap7
ocvt     / tty0
ocvt     / tty1
ocvt     / tty2
ocvt     / tty3
ocvt     / tty4
ocvt     / tty5
ocvt     / tty6
ocvt     / tty7
error    / crd

```

UNIX IMPLEMENTATION

2: / check open write access

```

neg    r1 / make inode number positive
jsr    r0,access; 1 / get inode in 0 core
bit    $40000,i.flgs / is it a directory?
bne    2f / yes, transfer (error)
cmp    r1,$40. / no, is it a special file?
bgt    3f / no, return
mov    r1,-(sp) / yes
asl    r1
jmp    *1f-2(r1) / figure out which special file it is
        / and transfer

```

1:

```

otty   / tty
leadr  / ppt
sret   / mem
sret   / rf0
sret   / rk0
sret   / tap0
sret   / tap1
sret   / tap2
sret   / tap3
sret   / tap4
sret   / tap5
sret   / tap6
sret   / tap7
ocvt   / tty0
ocvt   / tty1
ocvt   / tty2
ocvt   / tty3
ocvt   / tty4
ocvt   / tty5
ocvt   / tty6
ocvt   / tty7
/      ejec / lpr

```

otty: / open console tty for reading or writing

```

mov    $100,*$tks / set interrupt enable bit (zero others) in
        / reader status reg
mov    $100,*$tps / set interrupt enable bit (zero others) in
        / punch status reg
mov    tty+[ntty*8]-8+6,r5 / r5 points to the header of the
        / console tty buffer
incb   (r5) / increment the count of processes that opened the
        / console tty
tst    u.ttyp / is there a process control tty (i.e., has a tty
        / buffer header
bne    sret / address been loaded into u.ttyp yet)? Yes, branch
mov    r5,u.ttyp / no, make the console tty the process control
        / tty
br     sret / ?

```

sret:

```

clr    *$ps / set processor priority to zero
mov    (sp)+,r1 / pop stack to r1

```

3:

```

rts    r0

```

UNIX IMPLEMENTATION

```

oppt: / open paper tape for reading or writing
      mov    $100,$sprs / set reader interrupt enable bit
      tstb  pptiflg / is file already open
      bne   2f / yes, branch
1:
      mov    $240,$ps / no, set processor priority to 5
      jsr   r0,getc; 2 / remove all entries in clist
      br    .+4 / for paper tape input and place in free list
      br    1b
      movb  $2,pptiflg / set pptiflg to indicate file just open
      movb  $10.,toutt+1 / place 10 in paper tape input tout entry
      br    sret
2:
      jmp   error / file already open

iclose: / close file whose i-number is in r1
      tst   r1 / test i-number
      blt   2f / if neg., branch
      cmp   r1,$40. / is it a special file
      bgt   3b / no, return
      mov   r1,-(sp) / yes, save r1 on stack
      asl   r1
      jmp   *1f-2(r1) / compute jump address and transfer
1:
      cttty / tty
      cppt  / ppt
      sret  / mem
      sret  / rf0
      sret  / rk0
      sret  / tap0
      sret  / tap1
      sret  / tap2
      sret  / tap3
      sret  / tap4
      sret  / tap5
      sret  / tap6
      sret  / tap7
      ccvt  / tty0
      ccvt  / tty1
      ccvt  / tty2
      ccvt  / tty3
      ccvt  / tty4
      ccvt  / tty5
      ccvt  / tty6
      ccvt  / tty7
      error / crd

2: / negative i-number
      neg   r1 / make it positive
      cmp   r1,$40. / is it a special file
      bgt   3b / no, return
      mov   r1,-(sp)
      asl   r1 / yes, compute jump address and transfer
      jmp   *1f-2(r1)
1:

```

UNIX IMPLEMENTATION

```

ctty    / tty
leadr   / ppt
sret    / mem
sret    / rf0
sret    / rk0
sret    / tap0
sret    / tap1
sret    / tap2
sret    / tap3
sret    / tap4
sret    / tap5
sret    / tap6
sret    / tap7
ccvt    / tty0
ccvt    / tty1
ccvt    / tty2
ccvt    / tty3
ccvt    / tty4
ccvt    / tty5
ccvt    / tty6
ccvt    / tty7
/      ejec / lpr

ctty: / close console tty
      mov    tty+[ntty*8]-8+6,r5 / point r5 to the console tty buffer
      decb   (r5) / dec number of processes using console tty
      br     sret / return via sret

cppt: / close paper tape
      clrb   pptiflg / set pptiflg to indicate file not open
1:
      mov    $240.*$ps / set process or priority to 5
      jsr    r0,getc; 2 / remove all ppt input entries from clist
                        / and assign to free list
      br     sret
      br     1b

/ejec:
/      mov    $100,*$lps / set line printer interrupt enable bit
/      mov    $14,r1 / 'form feed' character in r1 (new page).
/      jsr    r0,lptoc / space the printer to a new page
/      br     sret / return to caller via 'sret'

leadr: / produce paper tape leader
      mov    $100,*$pps / set paper tape punch interrupt enable
      mov    $100.,-(sp) / 101. characters of 'nul' will be output as
                        / leader
1:
      clr    r1 / r1 contains a 'nul' character
      jsr    r0,pptoc / output the 'nul' character
      dec    (sp)
      bge    1b / last leader character output? no, branch
      tst    (sp)+ / bump stack pointer
      br     sret / return to caller via 'sret'

sysmount: / mount file system; args special; name

```

UNIX IMPLEMENTATION

```

jsr    r0,arg2 / get arguments special and name
tst    mnti / is the i-number of the cross device file zero?
bne    errora / no, error
jsr    r0,getspl / get special files device number in r1
mov    (sp)+,u.namep / put the name of file to be placed on the
                    / device
mov    r1,-(sp) / save the device number
jsr    r0,namei / get the i-number of the file
br     errora
mov    r1,mnti / put it in mnti
1:
tstb   sb1+1 / is 15th bit of I/O queue entry for dismountable
        / device set?
bne    1b / (inhibit bit) yes, skip writing
mov    (sp),mntd / no, put the device number in mntd
movb   (sp),sb1 / put the device number in the lower byte of the
        / I/O queue entry
mov    (sp)+,cdev / put device number in cdev
bis    $2000,sb1 / set the read bit
jsr    r0,ppoke / read in entire file system super block
1:
tstb   sb1+1 / done reading?
bne    1b / no, wait
br     sysreta / yes

sysumount: / special dismount file system
jsr    r0,arg; u.namep / point u.namep to special
jsr    r0,getspl / get the device number in r1
cmp    r1,mntd / is it equal to the last device mounted?
bne    errora / no error
1:
tstb   sb1+1 / yes, is the device still doing I/O (inhibit
        / bit set)?
bne    1b / yes, wait
clr    mntd / no, clear these
clr    mnti
br     sysreta / return

getspl: / get device number from a special file name
jsr    r0,namei / get the i-number of the special file
br     errora / no such file
sub    $4,r1 / i-number-4 rk=1,tap=2+n
ble    errora / less than 0? yes, error
cmp    r1,$9. / greater than 9 tap 7
bgt    errora / yes, error
rts    r0 / return with device number in r1

errora:
jmp    error / see 'error' routine

sysreta:
jmp    sysret / see 'sysret' routine

```

UNIX IMPLEMENTATION

/ u8 -- unix

```

rtap: / read from the dec tape
      asr    r1 / divide the i-number by 2
      sub    $4.,r1 / (i-number/2)-4 r1
      mov    r1,cdev / cdev now has device number
      jsr    r0,bread; 578. / read in block thats in *u.fofp

wtap:
      asr    r1 / divide i-number by 2
      sub    $4.,r1 / r1 = i-number minus 4
      mov    r1,cdev / this is used as the device number
      jsr    r0,bwrite; 578. / write block (u.fofp) on dec tape
                          / Maximum

rrk0:
      mov    $1,cdev / set current device to 1., disk
      jsr    r0,bread; 4872. / read block from disk (maximum block
                          / number allowed on device is 4872.)
                          / - (u.fofp) contains block number

wrk0:
      mov    $1,cdev / set current device to 1; disk
      jsr    r0,bwrite; 4872. / write block (u.fofp) on disk

rrf0:
      clr    cdev / set current device to 0., fixed head disk
      jsr    r0,bread; 1024. / read block (u.fofp) from fixed head
                          / disk (max. block number allowed on
                          / device is 1024.)

wrf0:
      clr    cdev / set current device to 0., fixed head disk
      jsr    r0,bwrite; 1024. / write block '(u.fofp)' on fixed head
                          / disk

bread: / read a block from a block structured device
      jsr    r0,tstdeve / error on special file I/O (only works on
                          / tape)
      mov    *u.fofp,r1 / move block number to r1
      mov    $2.-cold,-(sp) / "2-cold" to stack

1:
      cmp    r1,(r0) / is this block # greater than or equal to
                          / maximum block # allowed on device
      bhis   1f / yes, 1f (error)
      mov    r1,-(sp) / no, put block # on stack
      jsr    r0,preread / read in the block into an I/O buffer
      mov    (sp)+,r1 / return block # to r1
      inc    r1 / bump block # to next consecutive block
      dec    (sp) / "2-1-cold" on stack
      bgt    1b / 2-1-cold = 0? No, go back and read in next block

1:
      tst    (sp)+ / yes, pop stack to clear off cold calculation
      mov    *u.fofp,r1 / restore r1 to initial value of the
                          / block #

```

UNIX IMPLEMENTATION

```

cmp      r1,(r0)+ / block # greater than or equal to maximum
          / block number allowed
bhis    error10 / yes, error
inc     *u.fofp / no, *u.fofp has next block number
jsr     r0,preread / read in the block whose number is in r1
bis     $40000,(r5) / set bit 14 of the 1st word of the I/O
          / buffer

1:
bit     $22000,(r5) / are 10th and 13th bits set (read bits)
beq     1f / no
cmp     cdev,$1 / disk or drum?
ble     2f / yes
tstb    uquant / is the time quantum = 0?
bne     2f / no, 2f
mov     r5,-(sp) / yes, save r5 (buffer address)
jsr     r0,sleep; 31. / put process to sleep in channel 31 (tape)
mov     (sp)+,r5 / restore r5
br      1b / go back

2: / drum or disk
jsr     r0,idle; s.wait+2 / wait
br      1b

1: / 10th and 13th bits not set
bic     $40000,(r5) / clear bit 14
jsr     r0,tstdeve / test device for error (tape)
add     $8,r5 / r5 points to data in I/O buffer
jsr     r0,dioreg / do bookkeeping on u.count etc.

1: / r5 points to beginning of data in I/O buffer, r2 points to beginning
  / of users data
movb    (r5)+,(r2)+ / move data from the I/O buffer
dec     r3 / to the user's area in core starting at u.base
tst     u.count / done
beq     1f / yes, return
tst     -(r0) / no, point r0 to the argument again
br      bread / read some more

1:
mov     (sp)+,r0 / jump to routine that called readi
jmp     ret

bwrite: / write on block structured device
jsr     r0,tstdeve / test the device for an error
mov     *u.fofp,r1 / put the block number in r1
cmp     r1,(r0)+ / does block number exceed maximum allowable #
bhis    error10 / yes, error
inc     *u.fofp / no, increment block number
jsr     r0,wslot / get an I/O buffer to write into
jsr     r0,dioreg / do the necessary bookkeeping

1: / r2 points to the users data; r5 points to the I/O buffers data area
movb    (r2)+,(r5)+ / ; r3, has the byte count
dec     r3 / area to the I/O buffer
bne     1b
jsr     r0,dskwr / write it out on the device
tst     u.count / done
beq     1f / yes, 1f
tst     -(r0) / no, point r0 to the argument of the call
br      bwrite / go back and write next block

1:

```

UNIX IMPLEMENTATION

```

mov    (sp)+,r0 / return to routine that called write1
jmp    ret

tstdev: / check whether permanent error has occurred on special file
        / I/O
mov    cdev,r1 / only works on tape; r1 has device #
tstb  deverr(r1) / test error bit of device
bne   1f / error
rts   r0 / device okay

1:
clr   deverr(r1) / clear error

error10:
jmp   error / see 'error' routine

dioreg:
mov   u.count,r3 / move char count to r3
cmp   r3,$512. / more than 512. char?
blos  1f / no, branch
mov   $512.,r3 / yes, just take 512.

1:
mov   u.base,r2 / put users base in r2
add   r3,u.nread / add the number to be read to u.nread
sub   r3,u.count / update count
add   r3,u.base / update base
rts   r0 / return

preread:
jsr   r0,bufaloc / get a free I/O buffer (r1 has block number)
br   1f / branch if block already in a I/O buffer
bis   $2000,(r5) / set read bit (bit 100 in I/O buffer)
jsr   r0,poke / perform the read

1:
clr   *$ps / ps = 0
rts   r0

dskrd:
jsr   r0,bufaloc / shuffle off to bufaloc; get a free I/O buffer
br   1f
bis   $2000,(r5) / set bit 10 of word 1 of I/O queue entry
        / for buffer
jsr   r0,poke / just assigned in bufaloc; bit 10=1 says read

1:
clr   *$ps
bit   $22000,(r5) / if either bits 10, or 13 are 1; jump to idle
beq   1f
jsr   r0,idle; s.wait+2
br   1b

1:
add   $8,r5 / r5 points to first word of data in block just read
        / in
rts   r0

wslot:
jsr   r0,bufaloc / get a free I/O buffer; pointer to first
br   1f / word in buffer in r5

```

UNIX IMPLEMENTATION

```

1:      bit    $22000,(r5) / check bits 10, 13 (read, waiting to read)
        / of I/O queue entry
    beq    1f / branch if 10, 13 zero (i.e., not reading, or waiting
        / to read)
    jsr    r0,idle; s.wait+2 / if buffer is reading or writing to read,
        / idle
    br     1b / till finished

1:      bis    $101000,(r5) / set bits 9, 15 in 1st word of I/O queue
        / (write, inhibit bits)
    clr    *$ps / clear processor status
    add    $8,r5 / r5 points to first word in data area for this
        / block
    rts    r0

dskwr:  bic    $100000,*bufp / clear bit 15 of I/O queue entry at
        / bottom of queue

ppoke:  mov    $340,*$ps
        jsr    r0,poke
        clr    *$ps
        rts    r0

poke:   mov    r1,-(sp)
        mov    r2,-(sp)
        mov    r3,-(sp)
        mov    $bufp+nbuf+nbuf+6,r2 / r2 points to highest priority I/O
        / queue pointer

1:      mov    -(r2),r1 / r1 points to an I/O queue entry
    bit    $3000,(r1) / test bits 9 and 10 of word 1 of I/O queue
        / entry
    beq    2f / branch to 2f if both are clear
    bit    $130000,(r1) / test bits 12, 13, and 15
    bne    2f / branch if any are set
    movb   (r1),r3 / get device id
    tstb   deverr(r3) / test for errors on this device
    beq    3f / branch if no errors
    mov    $-1,2(r1) / destroy associativity
    clrb   1(r1) / do not do I/O
    br     2f

3:      cmpb   r3,$1 / device id = 1; device is disk
    blt    prf / device id = 0; device is drum
    bgt    ptc / device id greater than or equal to 1; device is
        / dec tape
    bit    $2,active / test disk busy bit
    bne    2f / branch if bit is set
    bis    $2,active / set disk busy bit
    mov    r1,rkap / rkap points to current I/O queue entry for disk
    mov    2(r1),mq / put physical block number in mq
    mov    $12.,div / divide physical block number by 12.

```

UNIX IMPLEMENTATION

```

mov    $rkda+2,r3 /
mov    ac,-(sp) / put remainder from divide on stack; gives
        / sector number
mov    $4,1sh / shift quotient 4 bits, to align with cyl and surf
        / bits in rkda
bis    mq,(sp) / or mq with sector; gives total disk address
br     3f
prf: / drum
bit    $1,active / test drum busy bit
bne    2f / branch if bit is set
bis    $1,active / set drum busy bit
mov    r1,rfap / rfap points to current I/O queue entry for drum
mov    $dae+2,r3
clr    -(sp)
movb   2(r1),1(sp) / move low byte of physical block number into
        / high byte of stack
clr    -(sp) / word
movb   3(r1),(sp) / move high byte of physical block number into
        / low byte of stack
mov    (sp)+,-(r3) / load dae with high byte of physical block
        / number
3:
mov    (sp)+,-(r3) / load rkda register; load dar register
mov    6(r1),-(r3) / load bus address register
mov    4(r1),-(r3) / load word count register
mov    $103,-(sp) / 103 indicates write operation when loaded
        / in csr
bit    $2000,(r1) / if bit 10 of word 1 of I/O queue entry is
        / a one
beq    3f / then read operation is indicated
mov    $105,(sp) / 105 indicates read operation
3:
mov    (sp)+,-(r3) / load csr with interrupt enabled, command, go
br     seta
ptc: / tape I/O
bit    $4,active
bne    2f
mov    tccm,r3
swab   r3
bic    $17,r3
add    $2,r3
cmpb   r3,(r1)
beq    3f
movb   $1,tccm / stop transport if not same unit
3:
bis    $4,active
mov    r1,tcap
mov    $20.,tcerrc
mov    $tape1,tcstate
movb   (r1),r3 / device
sub    $2,r3 / now unit
swab   r3
bis    $103,r3 / now rbn,for,unit,ie
mov    r3,tccm
seta: / I/O queue bookkeeping; set read/write waiting bits.
mov    (r1),r3 / move word 1 of I/O queue entry into r3

```

UNIX IMPLEMENTATION

```

bic    $!3000,r3 / clear all bits except 9 and 10
bic    $3000,(r1) / clear only bits 9 and 10
rol    r3
rol    r3
rol    r3
bis    r3,(r1) / or old value of bits 9 and 10 with bits 12
        / and 13
2:
cmp    r2,$bufp / test to see if entire I/O queue has been
        / scanned
bhi    1b
mov    (sp)+,r3
mov    (sp)+,r2
mov    (sp)+,r1
rts    r0

bufaloc:
mov    r2,-(sp) / save r2 on stack
mov    $340,$ps / set processor priority to 7
1:
clr    -(sp) / vacant buffer
mov    $bufp,r2 / bufp contains pointers to I/O queue entrys
        / in buffer area
2:
mov    (r2)+,r5 / move pointer to word 1 of an I/O queue entry
        / into r5
bit    $!73000,(r5) / lock+keep+active+outstanding
bne    3f / branch when any of bits 9,10,12,13,14,15 are set
        / (i.e., buffer busy)
mov    r2,(sp) / save pointer to last non-busy buffer found
        / points to word 2 of I/O queue entry)
3:
cmpb   (r5),cdev / is device in I/O queue entry same as current
        / device
bne    3f
cmp    2(r5),r1 / is block number in I/O queue entry, same as
        / current block number
bne    3f
tst    (sp)+ / bump stack pointer
br     1f / use this buffer
3:
cmp    r2,$bufp+nbuf+nbuf
blo    2b / go to 2b if r2 less than bufp+nbuf+nbuf (all
        / buffers not checked)
mov    (sp)+,r2 / once all bufs are examined move pointer to
        / last free block
bne    2f / if (sp) is non zero, i.e., if a free buffer is
        / found branch to 2f
jsr    r0,idle; s.wait+2 / idle if no free buffers
br     1b
2:
tst    (r0)+ / skip if warmed over buffer
1:
mov    -(r2),r5 / put pointer to word 1 of I/O queue entry in r5
movb   cdev,(r5) / put current device number in I/O queue entry
mov    r1,2(r5) / move block number into word 2 of I/O queue

```

UNIX IMPLEMENTATION

```

                                / entry
1:
    cmp    r2,$bufp / bump all entrys in bufp and put latest assigned
    blos   1f / buffer on the top (this makes if the lowest priority)
    mov    -(r2),2(r2) / job for a particular device
    br     1b

1:
    mov    r5,(r2)
    mov    (sp)+,r2 / restore r2
    rts    r0

tape: / dec tape interrupt
    jsr    r0,setisp / save registers and clockp on stack
    mov    tcstate,r3 / put state of dec tape in r3
    jsr    r0,trapt; tccm; tcap; 4 / busy bit
    mov    r3,pc / device control status register
                / if no errors, go to device state (an address)

taper: / dec tape error
    dec    tcerrc / decrement the number of errors
    bne    1f / if more than 1 branch
    movb   1(r2),r3 / r2+1 points to command register upper byte
    bic    $!7,r3 / clear all but bits 8-10 (Unit Selection)
    incb   deverr+2(r3) / set error bit for this tape unit
    br     tape3

1: / more than 1 error
    bit    $4000,(r2) / direction of tape
    beq    1f / if forward go to 1f
    bic    $4000,(r2) / reverse, set to forward
    mov    $tape1,tcstate / put tape 1 in the state
    br     0f

1: / put tape in reverse
    bis    $4000,(r2) / set tape to reverse direction
    mov    $tape2,tcstate / put tape 2 as the state

0:
    bis    $4,active / check active bit of tape
    movb   $!03,(r2) / set read function and interrupt enable
    br     4f / go to retisp

tape1: / read bn forward
    mov    $tcdt,r0 / move address of data register to r0
    cmp    (r0),2(r1) / compare block addresses
    blt    0b / if lt, keep moving
    bgt    taper / if gt, reverse
    mov    6(r1),-(r0) / put bus address in tcba
    mov    4(r1),-(r0) / put word count in tcwc
    mov    $!15,-(sp) / put end interrupt enable
    bit    $20000,(r1) / is "waiting to read bit" of I/O queue set?
    beq    1f / no, 1f
    mov    $!05,(sp) / yes, put and interrupt enable

1:
    movb   (sp)+,(r2) / move function into command register (tccm)
    bis    $4,active / set active bit
    mov    $tape3,tcstate / get ready for I/O transfer
    br     4f / go to retisp (rti)

tape2: / read bn bakasswards

```

UNIX IMPLEMENTATION

```

mov    tcdt,r0 / r0 has contents of data register
add    $3,r0 / overshoot
cmp    r0,2(r1)
bgt    0b / if gt keep reading
br     taper / else reverse

```

```

tape3: / I/O transfer
bic    $30000,(r1) / clear bits 12 and 13 of I/O queue entry
jsr    r0,poke / do the I/O
bit    $4,active / still busy see if pick up r-ahead, w-behind
bne    1f / yes
movb   $1,(r2) / no, indicate too bad

```

```

1:
jsr    r0,wakeup; runq; 31. / wait up
br     4f / retisp

```

```

drum: / interrupt handler
jsr    r0,setisp / save r1,r2,r3, and clockp on the stack
jsr    r0,trapt; dcs; rfap; 1 / check for stray interrupt or
                               / error
br     3f / no, error
br     2f / error

```

```

disk:
jsr    r0,setisp / save r1,r2,r3, and clockp on the stack
jmp    *$0f

```

```

0:
jsr    r0,trapt; rkcs; rkap; 2
br     3f / no, errors
mov    $115,(r2) / drive reset, errbit was set
mov    $1f,0b-2 / next time jmp *$0f is executed jmp will be
                / to 1f
br     4f

```

```

1:
bit    $20000,rkcs
beq    4f / wait for seek complete
mov    $0b,0b-2
mov    rkap,r1

```

```

2:
bit    $3000,(r1) / are bits 9 or 10 set in the 1st word of
                / the disk buffer
bne    3f / no, branch ignore error if outstanding
inc    r1
asr    (r1)
asr    (r1)
asr    (r1) / reissue request
dec    r1

```

```

3:
bic    $30000,(r1) / clear bits 12 and 13 in 1st word of buffer
mov    ac,-(sp)
mov    mq,-(sp) / put these on the stack
mov    sc,-(sp)
jsr    r0,poke
mov    (sp)+,sc
mov    (sp)+,mq / pop them off stack
mov    (sp)+,ac

```

# UNIX IMPLEMENTATION

```

4:      jmp      retisp / u4-3

trapt:      / r2 points to the
mov      (r0)+,r2 / device control register
mov      *(r0)+,r1 / transaction pointer points to buffer
tst      (sp)+
tstb     (r2) / is ready bit of dcs set?
bge     4b / device still active so branch
bit     (r0),active / was device busy?
beq     4b / no, stray interrupt
bic     (r0)+,active / yes, set active to zero
tst     (r2) / test the err(bit is) of dcs
bge     2f / if no error jump to 2f
tst     (r0)+ / skip on error

2:      jmp      (r0)

```

UNIX IMPLEMENTATION

/ u9 -- unix

trcv:

*/ tty receiver interrupt handler*

```

jsr    r0,1f
1:
mov    r1,-(sp)
mov    r2,-(sp)
mov    r3,-(sp)
mov    clockp,-(sp)
mov    $s.syst+2,clockp
sub    $trcv+4,r0 / 0%4 / calculate offset for tty causing
asl    r0 / 0%8 / this interrupt
mov    rcsr(r0),r2
mov    rcbr(r0),r1
tst    r2
blt    1f / error
tst    tty+6(r0)
beq    1f
bit    $40,r2 / parity
bne    3f / branch if set
tstb   tty+4(r0)
blt    4f / 37 parity not allowed
br     2f
3:
bitb   $100,tty+4(r0)
beq    2f / non-37 parity not allowed
4:
bic    $(177),r1 ? !177
bit    $40,tty+4(r0)
bne    3f / raw
cmp    r1,$177
beq    5f
cmp    r1,$34
bne    3f
5:
mov    tty+6(r0),r0
beq    2f
movb   r1,6(r0) / interrupt or quit
jsr    r0,wakeall
br     2f
3:
cmp    r1,$15 / or
bne    3f
bit    $20,tty+4(r0)
beq    3f
mov    $12,r1
3:
bitb   $4,tty+4(r0)

```

*A*

UNIX IMPLEMENTATION

```

    beq      3f
    cmp      r1,$'A
    blo     3f
    cmp      r1,$'Z
    bhi     3f
    add     $40,r1
3:
    movb    tty+3(r0),0f
    jsr     r0,putc; 0:.. / put char on input clist
           br 2f
    bitb    $10,tty+4(r0) / echo
    bne     4f / branch echo bit set
    cmp     r1,$12
    bne     3f
    bitb    $20,tty+4(r0) / cr
    beq     3f
4:
    cmp     r1,$4 / is char input an eot
    beq     1f
    mov     r1,-(sp) / put char on stack
    movb    tty+3(r0),0f
    inc     0f
    jsr     r0,putc; 0:.. / put char just input on output clist
           br .+2
    jsr     r0,starxmt
    mov     (sp)+,r1
3:
    bitb    $40,tty+4(r0) / raw
    bne     1f / branch if raw bit set
    cmp     r1,$12
    beq     1f
    movb    tty+3(r0),r1
    cmpb    cc(r1),$15.
    blo     2f
1:
    movb    tty+3(r0),0f
    jsr     r0,wakeup; runq; 0:.. / call wakeup for process
2:
    jmp     retisp
txmt:
    jsr     r0,1f
    jsr     r0,1f
1:
    mov     r1,-(sp)
    mov     r2,-(sp)
    mov     r3,-(sp)
    mov     clockp,-(sp)
    mov     $s.syst+2,clockp
    sub     $txmt+4,r0 / 0%4 / offset in cc

```

*/ttyx transmitter interrupt handler.*

UNIX IMPLEMENTATION

```

asl    r0 / 0%8
jsr    r0,starxmt
jmp    retisp

```

xmtto:

```

mov    r0,-(sp)
mov    2(sp),r0 / 0%2+6
sub    $6,r0
asl    r0
asl    r0 / 0%8
jsr    r0,starxmt
mov    (sp)+,r0
rts    r0

```

starxmt:

```

mov    (sp),r1 / 0%8 r1 contains 8xtty number
movb   tty+3(r1),r1 / place contents of 4th byte of "tty"
        / buf in r1 (cc,cf,cl offset)
cmpb   cc+1(r1),$10. / is char count for tty output greater
        / than or equal to 10
bhi    1f / yes
mov    r1,0f / no, make offset an arg of "wakeup"
inc    0f / increment arg of wakeup
jsr    r0,wakeup; runq+2; 0:.. / wakeup process identified
        / by wlist

```

1: / entry specified by argument in 0:

```

mov    (sp),r1 / 0%8 / r1 contains 8xtty number
asr    r1
asr    r1
asr    r1 / 0%1 r1 contains tty number
tstb   toutt+3(r1) / is tout entry for tty output = 0
bne    1f / no, return to calling routine
mov    (sp),r2 / yes, place (8xtty number) into r2
tstb   tcsr(r2) / does tty's tcsr register = 0 (is ready
        / bit = 0)
bge    1f / yes, return to calling routine
movb   tty+2(r2),r1 / no, place third byte of "tty" buf
        / into r1 (char left over after lf)
clrb   tty+2(r2) / clear third byte
tst    r1 / is third byte = 0
bne    3f / no, r1 contains a non nul character
movb   tty+3(r2),0f / yes, make byte 4 arg of "getc"
inc    0f / increment arg to make it tty output list of
        / clist
jsr    r0,getc; 0:.. / obtain next character in clist for tty
        / out and place in r1
br 1f / if no entry in clist to be output, return to
        / calling routine

```

3:

```

bic    $!177,r1 / zero out bits 7-15 of r1
movb   partab(r1),r3 / move "partab" entry (identified by
        / r1) into r3
bge    3f / if entry is greater than or equal to 0 (digit
        / 2, far left digit = 0) branch
bisb   200,r1 / if entry is less than 0 add 128 to ASC11
        / code for char to be output

```

UNIX IMPLEMENTATION

```

bic    $!177,r3 / to make it teletype code and then clear
        / bits 7-15 of r3
3:
mov     (sp),r2 / r2 contains 8xtty number
bit    $4,rcsr(r2) / is carrier present for tty
beq    starxmt / no carrier flush
mov     r1,-(sp) / yes, place character to be output on stack
cmp    r1,$11 / is character "ht"
bne    3f / no
bitb   $2,tty+4(r2) / is tab to space flag for tty set
        / (bit 1 of byte 5 in "tty" buffer area)
beq    3f / no
mov     $240,(sp) / yes, change character to space
3:
mov     (sp)+,tcbr(r2) / place char to be output in tty output
        / buffer
add    $tty+1,r2 / place addr of 2nd byte of "tty" buf
jmp    1f-2(r3) / area in r2 (which is the column count) and
        / then
incb   (r2) / normal / jmp to location determined by digits
        / 0 and 1 of character's entry in "partab" which
        / is now in r3
!:
rts    r0 / non-printing
br     1f / bs
br     2f / nl (line feed)
br     3f / tab (horizontal tab)
br     4f / vert (vertical tab)
br     5f / cr
1:
decb   (r2) / col decrement column count in byte 2 of "tty"
        / area
bge    1f / if count >= 0 return to calling routine
clrb   (r2) / col set column count = 0
br     1f
2:
bit    $1,r1 / is bit 0 of ASC11 char = 1 (char = lf)
bne    2f / yes
bitb   $20,3(r2) / cr flag is bit 4 of 5th byte of "tty"
        / area = 1
beq    2f / no (only lf to be handled)
movb   $15,1(r2) / place "cr" in 3rd byte of "tty" area
        / (character leftover after "lf")
2:
movb   (r2),r3 / place present column count in r3
beq    1f / return to calling routine if count = 0
clrb   (r2) / col clear column count
asr    r3
asr    r3
asr    r3
asr    r3 / delay = col/16
add    $3,r3 / start to determine tout entry for tty output
br     2f
3:
bitb   $2,3(r2) / is bit 1 of 5th byte of "tty" area = 1
        / (tab to space bit set)

```

*A error, label lost!!*

UNIX IMPLEMENTATION

```

beq    3f / no
incb   (r2) / increment column count
bitb   $7,(r2) / are bits 0, 1 and 2 set at col 0%8
beq    1f / no
movb   $11,1(r2) / yes, place ht in another tab next time
br     1f / 3rd byte of tty area (character left over after
        / "lf")

3:
movb   (r2),r3 / place column count in r3
bisb   $7,(r2) / make bits 0, 1 and 2 of column count = 1
incb   (r2) / increment column count
bis    $!7,r3 / clear bits 3-15 of r3
neg    r3 / delay = dcol start to determine tout entry for
        / tty out
br     2f / by neg r3

4:
mov    $176.,r3 / delay = lots start to determine tout entry
br     2f

5:
mov    $10.,r3 / cr delay 160ms for tn300 start to determine
        / tout
clrb   (r2) / set column count = 0 entry

2:
add    $5,r3 / time for this char, increment value for tout
        / entry by 5
mov    (sp),r2 / 0%8 r2 contains 8xtty number
asr    r2
asr    r2
asr    r2 / 0%1 r2 contains tty number
movb   r3,toutt+3(r2) / place value for tout entry into tout
        / table

1:
rts    r0 / return

```

partab: / contains 3 digits for each character; digit 2 is used  
/ to determine if 200 is to added to ASC11 code digits 0  
/ and 1 are used to determine value for jump table.

```

.byte 002,202,202,002,002,002,202
.byte 204,010,006,212,012,214,202,002
.byte 202,002,002,202,002,002,202,002
.byte 002,202,202,002,202,002,002,202
.byte 200,000,000,200,000,200,200,000
.byte 000,200,200,000,200,000,000,200
.byte 000,200,200,000,200,000,000,200
.byte 200,000,000,200,000,200,200,000
.byte 200,000,000,200,000,200,200,000
.byte 000,200,200,000,200,000,000,200
.byte 000,200,200,000,200,000,000,200
.byte 200,000,000,200,000,200,200,000
.byte 000,200,200,000,200,000,000,200
.byte 200,000,000,200,000,200,200,000
.byte 200,000,000,200,000,200,200,000
.byte 000,200,200,000,200,000,000,202

```

*part error* EOT  
NAK

xmtt: jsr r0,cpass / get next character from user buffer area

UNIX IMPLEMENTATION

```

tst    r1 / is character nul
beq    xmtt / yes, get next character

1:
mov    $240,*$ps / set processor priority equal to 5
mov    (sp),r2 / r2 contains 1 node number of file
asl    r2 / 0%2+28 / multiply inode number by 2
sub    $21.,r2 / 0%2+7 / subtract 21 from 2x inumber to
        / get cc, cf, cl offset
mov    r2,0f / make offset arg of putc
cmpb   cc(r2),$50. / is char count for device greater than
        / or equal to 50
bhis   2f / yes
jsr    r0,putc; 0:... / find location in freelist to assign to
        / device and
br     2f / place char in list, if none available branch
        / to put process to sleep
mov    r0,-(sp) / place calling routines return address on
        / stack
mov    0b,r0 / place offset into cc, cl and cf tables in r0
sub    $7,r0 / subtract seven from offset
asl    r0 / multiply by 2
asl    r0 / 0%8 / multiply by 2 (r0 contains 8xtty number)
jsr    r0,starxmt / attempt to output character
mov    (sp)+,r0 / pop stack
br     xmtt / get next character

2:
mov    r1,-(sp) / place character on stack
mov    0b,0f / make offset into cc, cf, cl table arg of
        / sleep (identifies location in wlist)
jsr    r0,sleep; 0:... / put process to sleep
mov    (sp)+,r1 / remove character from stack
br     1b / try again

rcvt: / read tty
sub    $28.,r1 / 0%2 r1 contains 2xtty number
asl    r1
asl    r1 / r1 contains 8xtty number
mov    r1,-(sp)
mov    tty+6(r1),r5 / r5 contains address of 4th word in
        / tty area
tst    2(r5) / is char count = 0
bne    1f / no
bitb   $40,tty+4(r1) / raw flag set?
beq    2f / no
tst    -(sp) / yes, decrement sp
jsr    r0,rcvch / get character from clist
tst    (sp)+ / increment sp
mov    (sp)+,r2 / r2 contains 8xtty number
bitb   $4,rcsr(r2) / is carrier detect bit on
beq    3f / no
jsr    r0,passc / yes, place character in users buffer area

3:
jmp    ret

2:
jsr    r0,canon; rcvch / process a line of characters in
        / clist and place results in tty buffer

```

UNIX IMPLEMENTATION

/ area

```

1:      tst      (sp)+ / increment sp
1:      tst      2(r5) / is char count for tty buffer = 0
      beq      1f / yes
      movb     *4(r5),r1 / no, move character pointer to r1
      inc     4(r5) / increment character pointer
      dec     2(r5) / decrement character count
      jsr     r0,passc / place character, whose address is in
                  / r1, in
      br      1b / user buffer area. Then get next character.
1:      jmp     ret
rcvch:  mov     4(sp),r2 / 0%8 r2 contains 8x tty number
      mov     $4,r1
      bit     r1,rcsr(r2) / is carrier detection bit on
      bne     1f / yes
      bic     $1,rcsr(r2) / no, clear data terminal ready bit
      rts     r0
1:      movb     tty+3(r2),0f / make cc offset arg for "getc"
      mov     $240,*$ps / set processor priority = 5
      jsr     r0,getc; 0:... / get next character off clist
      br     2f / clist empty
      clr     *$ps / set processor priority = 0
      rts     r0
2:      mov     0b,0f / make "getc" arg an arg for "sleep"
      mov     r5,-(sp) / save tty buffer address on stack
      jsr     r0,sleep; 0:...
      mov     (sp)+,r5
      br     rcvch
ocvt:   sub     $28.,r1 / 0%2 calculate tty table offset
      mov     r1,r2
      asl     r1 / 0%4
      asl     r1 / 0%8
      mov     r1,-(sp)
      add     $6,r2 / calculate clist id clist offset
      movb    r2,tty+3(r1) / put clist id in tty table
1:      mov     (sp),r1
      bit     $4,rcsr(r1) / carrier detect bit set
      bne     1f / if so, branch
      mov     $511,rcsr(r1) / set ready, speed, interrupt enable,
                  / supervisor transmit
      movb    tty+3(r1),0f / put clist id in sleep argument
      jsr     r0,sleep; 0:...
      br     1b
1:      mov     tty+6(r1),r5 / put tty buffer address in r5
      tstb    (r5) / first byte of tty buffer = 0

```

UNIX IMPLEMENTATION

```

    bne    1f / if not, branch
    mov    $511,rcsr(r1) / set control bits for receiver
    mov    $511,tcsr(r1) / set control bits for transmitter
    movb   $210,TTY+4(r1) / put 210 in tty table word 3 / set flags
1:
    incb   (r5) / inc first byte of tty buffer
    tst    (sp)+
    tst    u.ttyp / is there a process control tty
    bne    1f / yes, then branch
    mov    r5,u.ttyp / no, make this tty the process control tty
    br     1f / return

ccvt:
    sub    $28.,r1
    asl    r1 / 0%4
    asl    r1
    mov    TTY+6(r1),r5
    decb   (r5)
1:
    jmp    sret

```

UNIX IMPLEMENTATION

/ ux -- unix

system:

```

    .=.+2
    .=.+128.
    .=.+2
    .=.+64.
    s.time: .=.+4
    s.syst: .=.+4
    s.wait: .=.+4
    s.idlet: .=.+4
    s.chrgt: .=.+4
    s.drerr: .=.+2

```

inode:

```

    i.flgs: .=.+2
    i.nlks: .=.+1
    i.uid: .=.+1
    i.size: .=.+2
    i.dskp: .=.+16.
    i.ctim: .=.+4
    i.mtim: .=.+4
    . = inode+32.

```

mount:

```

    .=.+1024.

```

proc:

```

    p.pid: .=.+[2*nproc]
    p.dska: .=.+[2*nproc]
    p.ppid: .=.+[2*nproc]
    p.break: .=.+[2*nproc]
    p.link: .=.+nproc
    p.stat: .=.+nproc

```

tty:

```

    . = .+[ntty*8.]

```

fsp:

```

    .=.+[nfiles*8.]

```

bufp:

```

    .=.+[nbuf*2]+6

```

sb0:

```

    .=.+8

```

sb1:

```

    .=.+8

```

swp:

```

    .=.+8

```

ii:

```

    .=.+2

```

idev:

```

    .=.+2

```

cdev:

```

    .=.+2

```

deverr: .=.+12.

active: .=.+2

rfap: .=.+2

rkap: .=.+2

tcap: .=.+2

tcstate: .=.+2

tcerrc: .=.+2

mnti: .=.+2

mntd: .=.+2

mpid: .=.+2

clockp: .=.+2

rootdir: .=.+2

toutt: .=.+16.; touts: .=.+32.

runq: .=.+6

UNIX IMPLEMENTATION

```

wlist:  .=.+40.
cc:     .=.+30.
cf:     .=.+31.
cl:     .=.+31.
clist:  .=.+510.
imod:   .=.+1
smod:   .=.+1
mmod:   .=.+1
uquant: .=.+1
sysflg: .=.+1
pptiflg: .=.+1
ttyoch: .=.+1
.even
.+.100.; sstack:
buffer: .=.+[ntty*140.]
        .=.+[nbuf*520.]

. = core-64.
user:
    u.sp:      .=.+2
    u.usp:     .=.+2
    u.r0:      .=.+2
    u.cdir:    .=.+2
    u.fp:      .=.+10.
    u.fofp:    .=.+2
    u.dirp:    .=.+2
    u.namep:   .=.+2
    u.off:     .=.+2
    u.base:    .=.+2
    u.count:   .=.+2
    u.nread:   .=.+2
    u.break:   .=.+2
    u.ttyp:    .=.+2
    u.dirbuf:  .=.+10.
    u.pri:     .=.+2
    u.intr:    .=.+2
    u.quit:    .=.+2
    u.emt:     .=.+2
    u.ilgins:  .=.+2
    u.cdev:    .=.+2
    u.uid:     .=.+1
    u.ruid:    .=.+1
    u.bsys:    .=.+1
    u.uno:     .=.+1

. = core

```

# UNIX IMPLEMENTATION

/ sh -- command interpreter

```

mov     sp,r5
mov     r5,shell larg / save orig sp in shell larg
cdpb   B(r5),$'- / was this sh calleZd by init or loginx~
bne    2f / no
sys    intr; 0 / yes, turn off interrupts
sys    quit; 0

2:
sys    getuid / who is user
tst    r0 / is it superuser
bne    2f / no
movb   $'#,at / yes, set new prompt symbol

2:
cmp    (r5),$1 / tty input?
ble    newline / yes, call with '-(or with no command
        / file name)
clr    r0 / no, set tty
sys    close / close it
mov    4(r5),0f / get new file name
sys    open; 0:..; 0 / open it
bec    1f / branch if no error
jsr    r5,error / error in file name
        /<Input not found\n\0>; .even
sys    exit

1:
clr    at / clear prompt character, if reading non-tty
        / input file

newline:
tst    at / is there a prompt symbol
beq    newcom / no
mov    $1,r0 / yes
sys    write; at; 2. / print prompt

newcom:
mov    shellarg,sp /
mov    $parbuf,r3 / initialize command list area
mov    $parp,r4 / initialize command list pointers
clr    infile / initialize alternate input
clr    outfile / initialize alternate output
clr    glflag / initialize global flag

newarg:
jsr    pc,blank / squeeze out leading blanks
jsr    r5,delim / is new character a ; \n or &
br     2f / yes

mov    r3,-(sp) / no, push arg pointer onto stack
cmp    r0,$'< / new input file?
bne    1f / no
mov    (sp),infile / yes, save arg pointer
clr    (sp) / clear pointer
br     3f

1:
cmp    r0,$'> / new output file?
bne    newchar / no
mov    (sp),outfile / yes, save arg pointer
clr    (sp) / clear pointer
br     3f

```

# UNIX IMPLEMENTATION

```

newchar:
    cmp    $' ',r0 / is character a blank
    beq    lf / branch if it is (blank as arg separator)
    cmp    $'\n+200,r0 / treat \n preceded by \
    beq    lf / as blank
    jsr    pc,putc / put this character in parbuf list
3:
    jsr    pc,getc / get next character
    jsr    r5,delim / is char a ; \n or &
    br    lf / yes
    br    newchar / no, start new character tests
1:
    clrb   (r3)+ / end name with \0 when read blank, or
           / delim
    mov    (sp)+,(r4)+ / move arg opt to parp location
    bne    lf / if (sp)=0, in file or out file points to arg
    tst    -(r4) / so ignore dummy (0), in pointer list
1:
    jsr    r5,delim / is char a ; \n or &
    br    2f / yes
    br    newarg / no, start newarg processing
2:
    clr    (r4) / \n, &, or ; takes to here (end of arg list)
           / after 'delim' call
    mov    r0,-(sp) / save delimiter in stack
    jsr    pc,docom / go to exec command in parbuf
    cmpb   (sp),$'& / get a new command without wait?
    beq    newcom / yes
    tst    r1 / was chdir just executed or line ended with
           / ampersand?
    beq    2f / yes
1:
    sys    wait / no, wait for new process to terminate
           / command executed)
    bcs    2f / no, children not previously waited for
    cmp    r0,r1 / is this my child
    bne    lb
2:
    cmp    (sp),$'\n / was delimiter a new line
    beq    newline / yes
    br    newcom / no, pick up next command

docom:
    sub    $parp,r4 / put arg count in r4
    bne    lf / any arguments?
    clr    r1 / no, line ended with ampersand
    rts    pc / return from call
1:
    jsr    r5,chcom; qchdir / is command chdir?
    br    2f / command not chdir
    cmp    r4,$4 / prepare to exec chdir, 4=arg count x 2
    beq    3f
    jsr    r5,error / go to print error
           <Arg count\n\n0>; .even
    br    4f
3:

```

# UNIX IMPLEMENTATION

```

mov    parp+2,0f / more directory name to svcs call
sys    chdir; 0:0 / exec chdir
bec    4f / no error exit
jsr    r5,error / go to print error
<Bad directory\n\0>; .even / this diagnostic

4:
clr    r1 / set r1 to zero to skip wait
rts    pc / and return

2:
jsr    r5,chcom; qlogin / is command login?
br 2f / not login, go to fork
sys    exec; parbuf; parp / exec login
sys    exec; binpb; parp / or /bin/login
2: / no error return??
sys    fork / generate sh child process for command
br newproc / exec command with new process
bec    1f / no error exit, old process
jsr    r5,error / go to print error
<Try again\n\0>; .even / this diagnostic
jmp    newline / and return for next try

1:
mov    r0,r1 / save id of child sh
rts    pc / return to "jsr pc, docom" call in parent sh

error:
movb   (r5)+,och / pick up diagnostic character
beq    1f / 0 is end of line
mov    $1,r0 / set for tty output
sys    write; och; 1 / print it
br     error / continue to get characters

1:
inc    r5 / inc r5 to point to return
bic    $1,r5 / make it even
clr    r0 / set for input
sys    seek; 0; 2 / exit from runcom, skip to end of
        / input file

chcom: / has no effect if tty input
mov    (r5)+,r1 / glogin akdir r1, bump r5
mov    $parbuf,r2 / command address r2 'login'

1:
movb   (r1)+,r0 / is this command 'chdir'
cmpb   (r2)+,r0 / compare command name byte with 'login'
        / or 'chdir'
bne    1f / doesn't compare
tst    r0 / is this
bne    1b / end of names
tst    (r5)+ / yes, bump r5 again to execute login
        / chdir

1:
rts    r5 / no, return to exec command

putc:
cmp    r0,$'" / single quote?
beq    1f / yes
cmp    r0,$'" / double quote
beq    1f / yes

```

## UNIX IMPLEMENTATION

```

        bic    $!177,r0 / no, remove 200, if present
        movb   r0,(r3)+ / store character in parbuf
        rts    pc

1:      mov    r0,-(sp) / push quote mark onto stack

1:      jsr    pc,getc / get a quoted character
        cmp   ; r0,$'\n / is it end of line
        bne   2f / no
        jsr    r5,error / yes, indicate missing quote mark
                <"' imbalance\n\n0>; .even
        jmp    newline / ask for new line

2:      cmp    r0,(sp) / is this closing quote mark
        beq   1f / yes
        bic   $!177,r0 / no, strip off 200 if present
        movb  r0,(r3)+ / store quoted character in parbuf
        br    1b / continue

1:      tst    (sp)+ / pop quote mark off stack
        rts   pc\, return

/ thp\^e new process

newproc:
        mov    infile,0f / move pointer to new file name
        beq   1f / branch if no alternate read file given
        tstb  *0f
        beq   3f / branch if no file name given
        clr   r0 / set tty input file name
        sys   close / close it
        sys   open; 0:..; 0 / open new input file for reading
        bcc   1f / branch if input file ok

3:      jsr    r5,error / file not ok, print error
                <Input file\n\n0>; .even / this diagnostic
        sys   exit / terminate this process and make parent sh

1:      mov    outfile,r2 / more pointer to new file name
        beq   1f / branch if no alternate write file
        cmpb  (r2),$'> / is > at beginning of file name?
        bne   4f / branch if it isn't
        inc   r2 / yes, increment pointer
        mov   r2,0f
        svb   open; 0:..; 1 / open file for writing
        bec   3f / if no error

4:      mov    r2,0f
        sys   creat; 0:..; 17 / create new file with this name
        bec   3f / branch if no error

2:      jsr    r5,error
                <Output file\n\n0>; .even
        sys   exit

3:      sys   close / close the new write file

```

## UNIX IMPLEMENTATION

```

mov    r2,0f / move new name to open
mov    $1,r0 / set tty file name
sys    close / close it
sys    open; 0;..; 1 / open new output file, it now has
                    / file descriptor 1
sys    seek; 0; 2 / set pointer to current end of file

1:
tst    glflag / was *, ? or [ encountered?
bne    lf / yes
svs    exec; parbuf; parp / no, execute this command
sys    exec; binpb; parp / or /bin/this command

2:
sys    stat; binpb; inbuf / if can't execute does it
                    / exist?
bes    2f / branch if it doesn't
mov    $shell,parp-2 / does exist, not executable
mov    $binpb,parp / so it must be
svs    exec; shell; parp-2 / a command file, get it with
                    / sh /bin/x (if x name of file)

2:
jsr    r5,error / a return for exec is the diagnostic
<No command\n\n0>; .even
sys    exit

1:
mov    $glob,parp-2 / prepare to process *,?
sys    exec; glob; parp-2 / execute modified command
br     2b

delim:
cmp    r0,$'\n / is character a newline
beq    lf
cmp    r0,$'& / is it &
beq    lf / yes
cmp    r0,$'; / is it ;
beq    lf / yes
cmp    r0,$'? / is it ?
beq    3f
cmp    r0,$'[ / is it beginning of character string
                    / (for glob)
bne    2f

3:
inc    glflag / ? or * or [ set flag

2:
tst    (r5)+ / bump to process all except \n,;, &

1:
rts    r5

blank:
jsr    pc,getc / get next character
cmp    $',r0 / leading blanks
beq    blank / yes, 'squeeze out'
cmp    r0,$200+'\n / new-line preceded by \ is translated
beq    blank / into blank
rts    pc

getc:

```

UNIX IMPLEMENTATION

```

tst      param / are we substituting for $n
bne     2f / yes
mov     inbuf,r1 / no, move normal input pointer to r1
cmp     r1,einbuf / end of input line?
bne     1f / no
jsr     pc,getbuf / yes, put next console line in buffer
br     getc

1:
movb    (r1)+,r0 / move byte from input buffer to r0
mov     r1,inbuf / increment routine
bis     escap,r0 / if last character was \ this adds
           / 200 to current character
clr     escap / clear, so escap normally zero
cmp     r0,$'\ ' / note that \ is equal \ in as
beq     1f
cmp     r0,$'$ / is it $
beq     3f / yes
rts     pc / no

1:
mov     $200,escap / mark presence of \ in command line
br     getc / get next character

2:
movb    *param,r0 / pick up substitution character put in
           / r0
beq     1f / if end of substitution arg, branch
inc     param / if not end, set for next character
rts     pc / return as though character in r0 is normal
           / input

1:
clr     param / unset substitution pointer
br     getc / get next char in normal input

3:
jsr     pc,getc / get digit after $
sub     $'0,r0 / strip off zone bits
cmp     r0,$9. / compare with digit 9
clob    1f / less than or equal 9
mov     $9.,r0 / if larger than 9, force 9

1:
mov     shellarg,r1 / get pointer to stack for
           / this call of shell
inc     r0 / digit +1
cmp     r0,(r1) / is it less than # of args in this call
bge     getc / no, ignore it, so this $n is not replaced
asl     r0 / yes, multiply by 2 (to skip words)
add     r0l,r0 / form pointer to arg pointer (-2)
mov     2(r0),param / more arg pointer to param
br     getc / go to get substitution arg for $n

getbuf:
mov     $inbuf,r0 / move input buffer address
mov     r0,inbuf / to input buffer pointer
mov     r0,einbuf / and initialize pointer to end of
           / character string
dec     r0 / decrement pointer so can utilize normal
           / 100p starting at 1f
mov     r0,0f / initialize address for reading 1st char

```

```

l:
    inc    Of / this routine filles inbuf with line from
           / console - if there is one
    clr    r0 / set for tty input
    sys    read; 0:0; 1 / read next char into inbuf
    bcs    xitl / error exit
    tst    r0 / a zero input is end of file
    beq    xitl / exit
    inc    einbuf / eventually einbuf points to \n
           / (+1) of this line
    cmp    0b,$inbuf+256. / have we exceeded input buffer size
    bhis   xitl / if so, exit assume some sort of binary
    cmpb   *0b,$'\n / end of line?
    bne    lb / no, go to get next char
    rts    pc / yes, return

xitl:
    sys    exit

quest:
    <?\n>

at:
    <@ >

qchdir:
    <chdir\0>
glogin:
    <login\0>
shell:
    </bin/sh\0>
glob:
    </etc/glob\0>
binpb:
    </bin/>
parbuf: .=.+1000.
        .even
param: .=.+2
glflag: .=.+2
infile: .=.+2
outfile: .=.+2
        .=.+2 / room for glob
parp: .=.+200.
inbuf: .=.+256.
escap: .=.+2
inbufp: .=.+2
einbuf: .=.+2
och: .=.+2
shellarg: .=.+2

```

# UNIX IMPLEMENTATION

/ init -- process control initialization

mount = 21.

```

sys    intr; 0 / turn off interrupts
sys    quit; 0
cmp    csw,$73700 / single user?
bne    1f / no

```

help:

```

clr    r0 / yes
sys    close / close current read
mov    $1,r0 / and write
sys    close / files
sys    open; ctty; 0 / open control tty
sys    open; ctty; 1 / for read and write
sys    exec; shell; shellp / execute shell
br     help / keep trying

```

1:

```

mov    $'0,r1 / prepare to change

```

1:

```

movb   r1,tapx+8 / mode of dec tape drive x, where
sys    chmod; tapx; 17 / x=0 to 7, to read/write by owner or
inc    r1 / non-owner mode
cmp    r1,$'8 / finished?
blo    1b / no
sys    mount; rk0; usr / yes, root file on mounted rko5
        / disk is /usr
sys    creat; utmp; 16 / truncate /tmp/utmp
sys    close / close it
movb   $'x,zero+8. / put identifier in output buffer
jsr    pc.wtmprec / go to write accting info
mov    $itab,r1 / address of table to r1

```

/ create shell processes

1:

```

mov    (r1)+,r0 / 'x, x=0, 1... to r0
beq    1f / branch if table end
movb   r0,ttvx+8 / put symbol in ttvx
jsr    pc,dfork / go to make new init for this ttvx
mov    r0,(r1)+ / save child id in word offer '0, '1,...etc.
br     1b / set up next child

```

/ wait for process to die

1:

```

sys    wait / wait for user to terminate process
mov    $itab,r1 / initialize for search

```

/ search for process id

2:

```

tst    (r1)+ / bump r1 to child id location
beq    1b / ? something silly
cmp    r0,(r1)+ / which process has terminated

```

UNIX IMPLEMENTATION

lne 2b / not this one

/ take name out of utmp

```

sub    $4,r1 / process is found, point 'x' to 'x
        / for it
mov    r1,-(sp) / save address on stack
mov    (r1),r1 / move 'x to r1
sub    $'0,r1 / remove zone bits from character
asl    r1 / generate proper
asl    r1 / offset
asl    r1 / for
asl    r1 / seek
mov    r1,0f / move it to offset loc for seek
mov    $zero,r1

```

2:

```

clr    (r1)+ / cclear-
cmp    r1,$zero+16. / output buffer
blo    2b / area
sys    open; utmp; 1 / open file for writing
bes    2f / if can't open, create user anyway
mov    r0,r1 / save file desc
sys    seek; 0:...; 0 / move to proper pointer position
mov    r1,r0 / not required
sys    write; zero; 16. / zero this position in
mov    r1,r0 / restore file descriptor
sys    close / close file

```

/ re-create user process

2:

```

mov    (sp)+,r1 / restore 'x to r1
mov    (r1)+,r0 / move it to r0
movb   r0,TTYX+8 / get correct ttyx
movb   r0,ZERO+8 / move identifier to output buffer
jsr    pc,WTMPREC / go to write accting into
jsr    pc,DFORK / fork
mov    r0,(r1)+ / save id of child
br     1b / go to wait for next process end

```

dfork:

```

mov    r1,r2
sub    $ITAB+2,r2 / left over
asl    r2 / from previous
asl    r2 / version of code
mov    r2,offset
sys    fork
br     1f / to new copy of init
bes    dfork / try again
rts    pc / return

```

1:

```

sys    quit; 0 / new init turns off
sys    intr; 0 / interrupts
sys    chown; TTYX; 0 / change owner to super user
sys    chmod; TTYX; 15 / change mode to read/write owner,
        / write non-owner

```

UNIX IMPLEMENTATION

```

sys    open; ttyx; 0 / open this ttyx for reading
        / and wait until someone calls
bes    help1 / branch if trouble
sys    open; ttyx; 1 / open this ttyx for writing after
        / user call
bes    help1 / branch if trouble
sys    exec; getty; gettyp / getty types <login> and
        / executes login which logs user
        / in and executes sh-

sys    exit / HELP!

```

```

help1:  jmp    help / trouble

```

```

wtmprec:
sys    time / get time
mov    ac,zero+10. / more to output
mov    mq,zero+12. / buffer
sys    open; wtmp; 1 / open accounting file
bes    2f
mov    r0,r2 / save file descriptor
sys    seek; 0; 2 / move pointer to end of file
mov    r2,r0 / not required
sys    write; zero; 16. / write accting info
mov    r2,r0 / restore file descriptor
sys    close / close file

```

```

2:     rts    pc

```

```

ctty:  </dev/tty\0>
shell: </bin/sh\0>
shellm: <-\0>
tapx:  </dev/tapx\0>
rk0:   </dev/rk0\0>
utmp:  </tmp/utmp\0>
wtmp:  </tmp/wtmp\0>
ttyx:  </dev/ttyx\0>
getty: </etc/getty\0>
usr:   </usr\0>
        .even

```

```

shellp: shellm
        0

```

```

gettyp: getty
        0

```

```

itab:
        '0; ..
        '1; ..
        '2; ..
        '3; ..
        '4; ..
        '5; ..
        '6; ..
        '7; ..
        0

```

UNIX IMPLEMENTATION

offset: .=.+2  
zero: .=.+8.; .=.+6; .=.+2

## 1. Overview

The code of UNIX is divided into 11 files, named u0 through u9 and ux. ux contains the definitions of the system tables and data areas; the actual code is in the other sections. These files are assembled together in the order u0 ... u9 ux. The boot procedures section of the UPM explains how to test and install a newly assembled system.

There are three major portions of UNIX: the file system, the process control system, and the rest. "The rest" refers mostly to the code implementing several miscellaneous system calls which do not fit neatly into any category. Unfortunately the various parts of UNIX are fairly well strewn about its constituent source files. The following is a rough key:

- u0 initialization
- u1 system entry; some system calls
- u2 most remaining system calls
- u3 process switching, swapping
- u4 character-oriented device interrupt time routines, except DC-11
- u5 basic file system routines
- u6 more file system routines
- u7 more file system, character-oriented device non-interrupt time routines
- u8 interrupt and non-interrupt time routines for block structured devices (disks, tape)
- u9 almost all code for DC-11 asynchronous communications interfaces

It has been mentioned parenthetically that UNIX is not very modular. Its lack of modularity is reflected in this document. Therefore (to paraphrase Fenichel and McIlroy referring to their description of TMGL) no single order of reading can be recommended; instead a chimneying technique is suggested, climbing not one wall at a time, but all simultaneously.

## 2. Overview of the data base.

A description of each item in the data base is given in Section F. In core data is defined in ux

## 3. System entry and exit

The system can legitimately be entered only by some sort of trap. The trap caused by the trap instruction (that is, sys) and all otherwise unknown traps are directed to one of the synonymous labels unkni or sysent. There the registers are saved in the following order:

```
r0
...
r5
ac
```

mq  
sc

A pointer to the stack (after the save) is retained. Then the instruction being executed at the time of the trap is examined to see whether it represents a legitimate system call. If so, a jump is made to the proper routine; if not, to the label badsys. Whenever the system is entered by this route, a flag is set to indicate that system code is being executed. No traps, including system calls, are allowed within the system.

To exit from a system call, a call handler jumps either to sysret to error. The only difference is that in the latter case the error bit (c-bit) is set in the word from which the processor status will be restored.

At sysret, a check is made to determine the last-mentioned i-node the super-block, or the dismountable super block have been modified; if so, the I/O to write out the appropriate area is started via ppoke. Then a check is made to determine if the user's time quantum ran out during his execution in the system. If so, tswap is called to give another user a chance to run. The registers are restored and an rti is executed to return to the user's program.

Label badsys is reached either because the user executed an illegal trap-type instruction or because a t-bit trap occurred. (The t-bit is used to implement the quit function.) badsys calls the appropriate internal routines to write out a core image file in the user's current directory, then jumps to the sysexit routine to terminate the process.

#### 4. Fork, Exit, Wait

Fork and exit implement the creation and destruction respectively of processes.

There is a fixed maximum number of processes. Each possible process has a slot in the process tables and a swap area on the RF disk associated with it.

Label sysfork implements the fork primitive. It searches the p.stat portion of the process table to find an idle process slot, and gives an error if none is found. An entry for the new process is placed on the run queue and wswap is called to swap out a copy of the current process' core image onto the new process' disk area. The fsp entry for each file open in the process is incremented to indicate that each such file is open in another process.

sysexit implements process destruction. It is more complicated than one might think. First each open file is closed by fclose. The process' status is set to unused. Then the process table is searched to find any children of the process. Any of these that have died but not waited for are marked free.

## UNIX IMPLEMENTATION

When the parent of the dying process is found, it is awakened (by `putlu`) if it is waiting. Then the dying process enters a zombie state in which it will never be run again, but stays around until a wait is completed by its parent process. If the parent is not found, the process just dies.

`syswait` implements the process wait facility. It searches the process table for a child process. If none is found, an error is returned. If a child is found in the zombie state (terminated but not buried by wait) its process ID is returned and its process slot is freed.

If all children are still active, `syswait` calls `swap` to give up the processor.

The possible states of a process (`p.stat` values) are:

- 0 free, i.e., no process associated with this slot number
- 1 active
- 2 waiting for a child to die
- 3 terminated, but not yet waited for (zombie).

### 5. Process swapping

The important routine is `swap`. When `swap` is called, the run queues are searched for the highest priority process. It is not the same as the process in core, core is written out to the appropriate disk area, the image of the new process is read in, and `swap` returns to the point in which it was called in the new process.

If there is no process in the queues, `idle` is called. `idle` consists essentially of a wait instruction; the effect of wait is such that `idle` returns after every interrupt. `swap` searches the queues again in the hopes of finding a process entered on a queue by the interrupt routine.

The I/O to write out a core image is done by `wswap`. It must operate on a stack internal to the system. `wswap` uses the program break `u.break` to determine how much to write out. Usually, the process' stack area is copied down to the top of the program area to speed up I/O. The I/O queue entry reserved for swapping is set up and `poke` is called to initiate the I/O.

The core image reading routine is `rswap`; it also uses the system stack. The core image is unpacked by `unpack`.

It is important to realize that running processes are not on the run queues. Therefore, processes which call `swap` must already have arranged to be put back on the run queues in some way.

The `tswap` entry to `swap` is used for timer runouts; it puts the process on the lowest priority queue before flowing into `swap`.


UNIX IMPLEMENTATION

6. File System

A detailed description of the file system is given in the UPM under Format of File System and Format of Directories. The diagrams on the following pages support that write up.

FORMAT OF FILE SYSTEM

Block  
Number

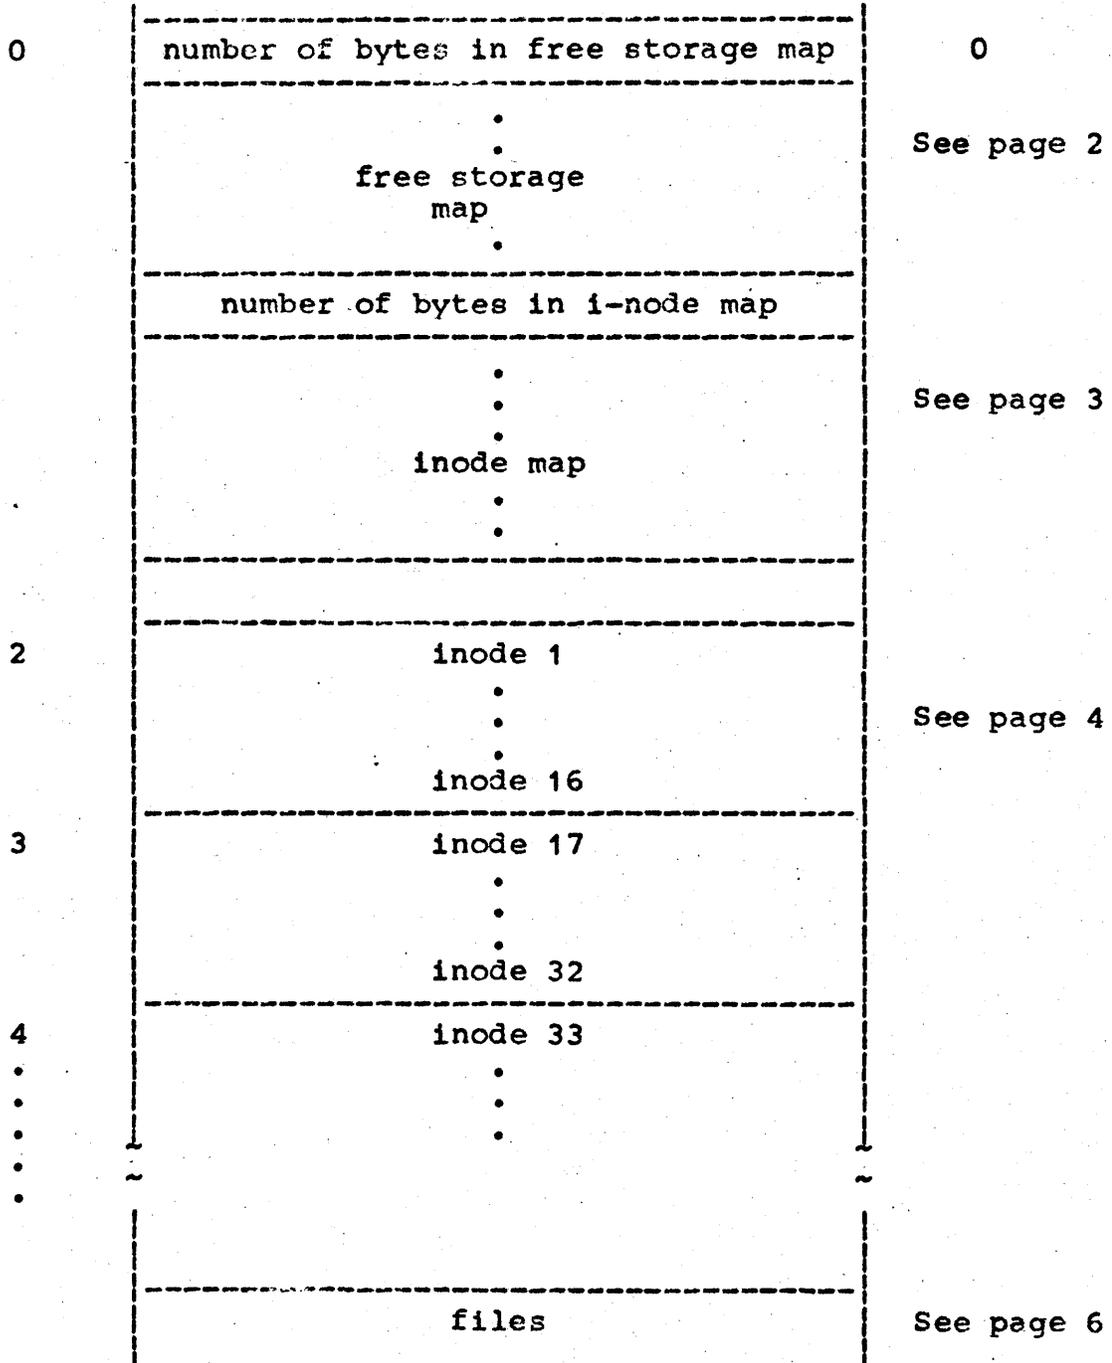

Notes: There are 256 words/block





# UNIX IMPLEMENTATION

## I-NODES

### Notes:

1. Each i-node represents 1 file.
2. I-numbers start at 1.
3. Storage begins in block 2.
4. i-nodes are 32 bytes long.  
16 inodes fit in 1 block.
5. The block number for i-node  $i$  is found by:  

$$\text{block number} = (i+31)/16$$
 The byte number from the start at the block is found by:  

$$\text{byte number} = 32 ((i+31)(\text{mod}16))$$

Ex. Find where i-node 50 is.  
 $\text{block number} = (50+31)/16 = 5$   
 it begins at byte number  $32. ((81)\text{mod}16)$   
 $= 32 (1) = 32$

block number

2	i-node 1	32 bytes/i-node
	.	
	.	
	.	
	i-node 16	
3	17	
	.	
	.	
	.	
	32	
4	33	
	.	
	.	
	.	
	48	
5	49	32 bytes
	50	_ block 5, byte 32
	.	
	.	
	.	

6. i-nodes below 41 are for special files.

UNIX IMPLEMENTATION

AN I-NODE IN DETAIL

byte		byte
	flags (see below)	0
3	user id of owner	2
	number of links	
	size in bytes	4
	1st indirect block or contents block	6
	2nd indirect or contents block	8
	.	
	.	
	.	
	.	
	8th indirect or contents block	20
	creation	22
25	time	24
	modification	26
29	time	28
	unused	30

The flags are as follows:

```

100000 i-node is allocated
040000 directory
020000 file has been modified (always on)
010000 large file
000040 set user ID on execution
000020 executable
000010 read, owner
000004 write, owner
000002 read, non-owner
000001 write, non-owner
    
```

UNIX IMPLEMENTATION

FILES

1) A small file is a file less than 8 blocks long. 2) A large file is greater than 8 blocks long. 3) Byte number "n" of a file is addressed as follows:

$$\text{block number} = n/512 = b$$

a) If the file is small (see flags)

physical block = bth entry in address portion of i-node

ex.  $i1 = 1500$

$$b = \frac{1500}{512} = 2$$

physical block = 2nd contents block in bytes 8 and 9 of the inode


b) If the file is large (greater than 8 blocks) then

$$\text{indirect block \#} = b/256$$

byte offset in indirect block =  $2 (b \text{ mod } 256)$

word found in this byte is the address of the block corresponding to b

ex.  $b = 1000$   
indirect block number =  $1000/256 = 3$   
byte offset =  $2 (1000 \text{ mod } 256) = 2 \cdot 232 = 464$

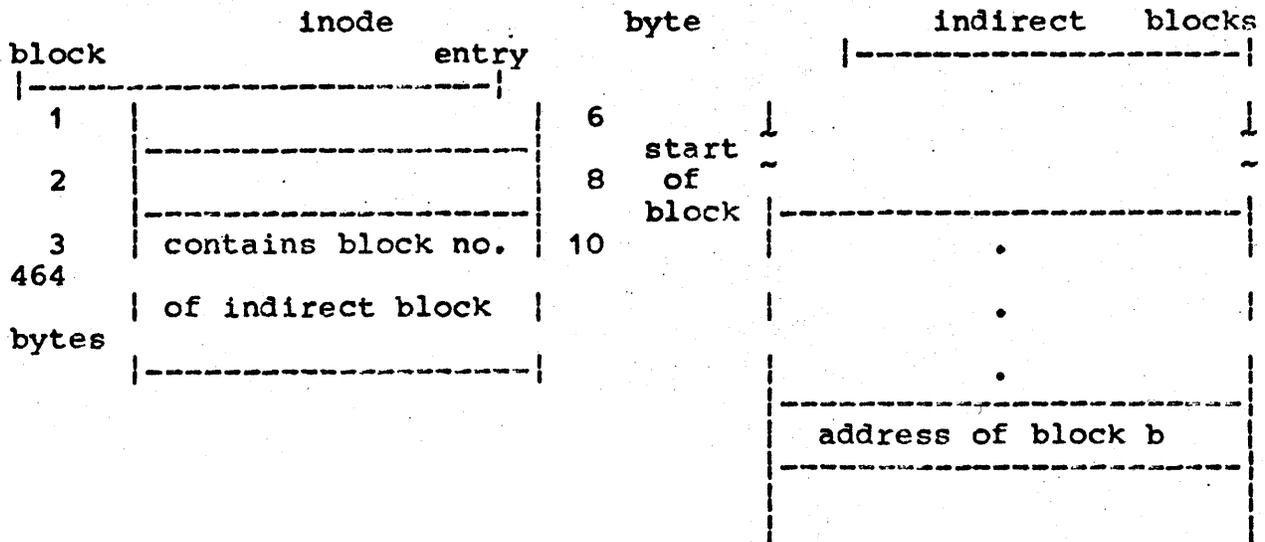

# UNIX IMPLEMENTATION

## DIRECTORIES

### Notes:

- 1) Like a file except no user (except superuser) may write into a directory.
- 2) A file is identified as a directory by a bit in the flag word of its i-node. (See i-node flag page 5)
- 3) Directory entries are 10 bytes long.

### Entry

1	i-number of directory itself (.)	10 bytes
	8 character file name	
2	i-number of parent directory (..)	
	8 character file name	
3	i-number of file represented by entry	
	8 character file name	
4	.	
.	.	
.	.	
.	.	

FSP TABLE

Notes:

- 1) The fsp table is an incore table containing information about open files.
- 2) It is 4 words/entry.
- 3) The same file can be opened more than once, and have more than one entry in the fsp table.

entry	15										
1	<table border="1"> <tr> <td>r/w</td> <td>i-number of open file</td> </tr> <tr> <td></td> <td>device number</td> </tr> <tr> <td></td> <td>offset pointer, i.e., r/w pointer to file</td> </tr> <tr> <td></td> <td> <table border="1"> <tr> <td>flag that says file has been deleted</td> <td>number of processes that have file open</td> </tr> </table> </td> </tr> </table>	r/w	i-number of open file		device number		offset pointer, i.e., r/w pointer to file		<table border="1"> <tr> <td>flag that says file has been deleted</td> <td>number of processes that have file open</td> </tr> </table>	flag that says file has been deleted	number of processes that have file open
r/w	i-number of open file										
	device number										
	offset pointer, i.e., r/w pointer to file										
	<table border="1"> <tr> <td>flag that says file has been deleted</td> <td>number of processes that have file open</td> </tr> </table>	flag that says file has been deleted	number of processes that have file open								
flag that says file has been deleted	number of processes that have file open										
2											
3											

# UNIX IMPLEMENTATION

## 7. Process Scheduling

Processes are scheduled to run according to a priority structure which is implemented via the runq table and the p.link table. These two tables are described below. (diagram on page 9)

### THE RUNQ TABLE

runq:

is a table of length 3, with one entry for each of the three ready-to-run queues of processes. The low byte of each entry contains the process number of the first process in the queue; the high byte contains the process number of the last process. The entry is 0 if there are no processes on the queue. Each queue is linked by the p.link entry in the process table.

	process number of last process on queue	process number of first process on queue	
highest priority queue	7	2	runq
	6	3	runq+2
lowest priority queue	10	4	runq+4

To demonstrate the interaction of p.link and runq:  
If the priority of process numbers was arranged as follows: 2, 8, 7, 3, 1, 6, 4, 5, 10, p.link would look like. So, the process 2 is found in the 2nd slot of the p.link table. In this case process 8.

slot numbers - ()		
8	(2)	6 (1)
5	(4)	1 (3)
4	(6)	10 (5)
7	(8)	3 (7)

p.link

p.link+2

p.link+4

p.link+6

p.link+nproc (16)

## 8. Terminal Control

The handling of character oriented devices (tty, lineprinter, console tty) is done via several tables and buffers, namely: The character count table "cc", the first character pointer table "cf", the last character pointer table "cl", the character list "clist", the tty control blocks "tty", the tty buffers "buffer" and the time out tables toutt and touts.

The tables cc, cf, cl are structured such that each entry is associated with the input or output of a specific tty or other device. The exact structure is shown in the diagram for these tables. The clist contains linked lists of characters associated with each device. See discussion in Section F.

When an input interrupt occurs from a specific device the interrupt routine puts the character received at the end of the clist string for inputs from that device. When an output interrupt occurs the next character on the clist string for outputs to the device is popped off the list and is transmitted. If the character being output generates a delay (lf, cr, ht, vt) the appropriate entry in the toutt table is set no output will be generated while the toutt entry is non-zero. Each clock generated input causes every non-zero toutt entry to be decremented. When a toutt entry becomes zero, the associated routine named in the touts table is called.

The tty buffers are used for editing the input clist strings for the tty's. When a sysread on a tty is done the clist input string for the device is scanned and put in buffer 28 #, @ or deletes are found they are stripped from the input and appropriate action is taken.

UNIX IMPLEMENTATION

TTY BLOCK AND BUFFER

I. TTY BLOCK

column tty is in		tty
sleep queue, wakeup queue, cc offset	char left over after "lf"	tty+2
	flags cr, tab, sp, raw, echo	tty+4
pointer to tty buffer		tty+6

- tty+4: bit 7 - parity 37  
 6 - parity non 37  
 5 - raw  
 4 - cr  
 3 - echo  
 2 - caps to lower case  
 1 - tab to space  
 0 - no delay

II. TTY BUFFER

	number of processes using this tty	buffer
char count		buffer+2
character pointer		buffer+4
	interrupt character	buffer+6
		buffer+8
char 2	char 1	buffer+10
char 4	char 3	
		data area
		buffer+130
		buffer+138.

UNIX IMPLEMENTATION

TOUPT, TOUTS TABLES

ppt entry	console tty entry
tty0 "	(lp)
tty2 "	tty1 entry
tty4 "	tty3 "
tty6 "	tty5 "
	tty7 "
console tty subroutine	entry point
ppt	" # <i>pptto</i> "
	(lp) ?
	: <i>xmtto</i> } <i>of these</i>
	: <i>xmtto</i>
	:

toutt  
 toutt+2  
 toutt+4  
 toutt+6  
 toutt+8  
 toutt+10  
 toutt+12  
 toutt+14  
 touts (tout+16)  
 touts+30

*time count decremented by clock interrupt*  
*when = 0 call ~~long~~ long routine*  
*touts routine*

UNIX IMPLEMENTATION

CC, CF, CL & CLIST TABLES

console <sup>in</sup> out <sup>char</sup> count	console <sup>in</sup> in <sup>char</sup> count	cc
ppt " "	ppt " "	cc+2
lp " "		cc+4
tty0 " "	tty0 " "	cc+6
tty1 " "	tty1 " "	cc+8
tty2 " "	tty2 " "	cc+10
tty3 " "	tty3 " "	cc+12
:	:	
tty7 " "	tty7 " "	cc+20
:	:	cc+22
:	:	
console <sup>in</sup> in <sup>1st</sup> char offset	free list 1st char offset	cc+8
ppt <sup>in</sup> in <sup>1st</sup> char offset	console out <sup>in</sup> 1st char offset	cc+30 cf: (cc)
tty0 <sup>in</sup> in <sup>1st</sup> char offset	ppt out <sup>in</sup> 1st char offset	cf+2
tty1 " " " "	lp " " " "	cf+4
tty0 " " " "	tty0 " " " "	cf+6
:	:	cf+8
:	:	
:	tty7 " " " "	cf+2
:	:	
2. cl(cc+31) freelist last char offset		cf+30 90 cf+30

UNIX IMPLEMENTATION

console <sup>out</sup> last char off	console <sup>in</sup> last char off	cl+1
ppt " " " "	ppt " " " "	cl+3
lp " " " "		cl+5
tty0 " " " "	tty0 " " " "	cl+7
⋮	⋮	
tty7 " " " "	tty7 " " " "	cl+21
		cl+23
⋮	⋮	
		cl+29
pointer to next char (0)	character (0)	clist (cl+3)
⋮	⋮	
pointer to next char (204)	character (204)	clist+508

## UNIX IMPLEMENTATION

active -

is a word whose bits encode the activity states of the various block-structured device controllers. If the RK disk bit is on, that device is running and should not be molested. The devices for the bits are:

bit	device
0	drum
1	disk
2	dectape

buffer -

start of the buffers used for block-structured device I/O (there are "nbuf" of them) and typewriter input (there are ntty of them).

From buffer to buffer + 1119., are the 8 tty buffers. From buffer + 1120. to buffer + 1259. is the console tty buffer. Each of these buffers is 70. words long. From buffer + 1260. to buffer + 4381. are the disk buffers. They are 256. words each plus 4 words which represent an I/O queue entry. Thus each block is 260. words. Pointers to these 260. word buffers are contained in bufp. bufp contains pointers to the I/O queue entrys of each buffer. For more information, see H.O, p. 2.

bufp -

contains pointers to the block-structured device buffers. It is 9 words long. The first 6 entries point to the I/O queue entries of the 6 buffers. The last 3 words contain:

sbo - address of I/O queue entry for the super block of the PF disk.

sbi - address of I/O queue entry for the super block of the dismountable device.

swp - address of I/O queue entry for the core image being swapped in or out.

cc -

is a 30. byte table. Each entry contains a count of the number of characters in the associated queue for that entry. The characters have either been received from a character oriented device, or are waiting to be output.

cdev -

The current device number. It is set up during the scan of a file name, and is an implicit argument to the routines which do I/O by device block number. cdev= 0-drum, 1-disk, 2... dec tape. This parameter is 1 word.

cf -

is a 31. byte table. Each entry points to the first character in an associated character queue. The first entry refers to the free list of character blocks. The pointers are offsets, divided by 2, in the "clist" table.

# UNIX IMPLEMENTATION

- cl** - is a 31. byte table. Each entry points to the last character in its associated character queue. The pointers are offsets, divided by 2, in the "clist" table.
- clist** - is a 510. byte table containing linked lists of input or output characters. Each entry is a word; the low byte contains the character; the high byte contains a pointer to the next byte in the list. The pointer is a word offset in "clist".
- clockp** - points to one of the clock cells in the super block (1 word).
- core** - address of the beginning of user core.
- dae** - disk address extension error reg. for RF-11 disk. (See Section G, pg 35)
- dcs** - disk control and status register. (See Section G, pg 34)
- deverr** - a seven word table containing the error status of devices. The index into this table is the device no. 'cdev'.
- | word | device        | codes                 |
|------|---------------|-----------------------|
| 1    | drum          | 0= no error, 1= error |
| 2    | disk          | "                     |
| 3    | dectape units | "                     |
| 4    | "             | "                     |
| 5    | "             | "                     |
| 6    | "             | "                     |
| 7    | "             | "                     |
- ecore** - address of the end of users core.
- fsp** - this table contains 8 bytes for each currently open file. It must be kept on a per-system basis since the same instance of an open file can be referred to by more than 1 process. This table has 1 entry for each "open" or "creat" call. Each entry contains information about an open file. The fsp table is indexed by the u.fp list. (See Section F, pg 8 for details.) The table is 400 bytes long.
- idata** - This 448. byte area contains assembled root, device, binary, etcetra, user and temporary directories and the cold boot initialization program directory. (See Section F, page 7 for a description of directory structure.) Preceding each of these assembled directories establishing i-nodes for the directories. Namely:

## UNIX IMPLEMENTATION

	A		A = i-node number
	B		B = i-node flags (See Section F, p. 5)
D		C	C = number of links
	E		D = user id of owner
			E = directory size in bytes "

Following the 4 word area is the directory associated with it. These directories are used in initializing the system during cold boot.

- idev** -  
the device number of the current i-node (1 word). See **ii**.
- ii** -  
the i-number of the i-node currently in the 'inode' area of core (1 word).
- imod?** -  
a flag set when the current i-node (**ii**) is modified. Whenever the current inode is changed, or whenever an exit to a user program takes place, this flag causes the i-node to be written out. This flag is 1 byte.
- inode** -  
lays out the structure of an i-node. Each i-node (32 bytes) specifies a file. While a particular file is under consideration, a copy of its i-node resides here. The current i-node number is kept in "**ii**" and its device in "**idev**". Labels beginning "**i.**" refer to locations in this area. (See Section F, pg. 5.)
- i.ctim** -  
creation time of the file. (2 words)
- i.dskp** -  
start location of an 8 word 'address' portion of the i-node. Each word contains a physical block number, from which a physical block address can be calculated. The index into this 8 word section of the inode can be considered a logical block number. If the file associated with the i-node is small (< 8 blocks). If the file is large (> 8 blocks), the physical block number indicates an indirect block which contains 256 words, each of which contains a physical block no. for a block associated with this file. A zero physical block no. in either the address words of the i-node or in an indirect block indicates that the corresponding block has never been allocated.

## UNIX IMPLEMENTATION

**i.flags** -  
flags (1 word) for the file are coded as follows:

Bit		set indicates	
0		- write, non-owner	
1		- read, non-owner	
2		- write, owner	
3		- read, owner	
4		- executable	
5		- set user ID on execution	
6		- These bits are not assigned	
7		-	"
8		-	"
9		-	"
10		-	"
11		-	"
12		- large file	
13		- file has been modified (always on)	
14		- directory	
15		- i-node is allocated	

**i.mtim** -  
modification time of the file (2 words).

**i.nlks** -  
number of links (directories) this file appears in. (1byte)

**i.size** -  
size of file in bytes. (1 word)

**i.uid** -  
id of the file owner (1 byte)

**lks** -  
clock status register. (See Section G, pg 36)

**mmod** -  
corresponding byte flag of imod above for the currently mounted desmountable file system.

**mntd** -  
is the internal device number corresponding to the device on which a removable file system is mounted. It is used with "mnti". (1 word)

**mnti** -  
records the i-number of the (inique) cross device file. That is, whenever this i-number is referred to on the RF disk, it will be translated into the root directory on the mounted device. (1 word)

**mount** -  
is the in core image of the super block for the dismountable file system currently mounted. It contains the i-node map and free map for the device.

## UNIX IMPLEMENTATION

- `mpid` -  
is the source of unique identifiers (names) for processes.  
It is incremented as each process is created. (1 word)
- `nbuf` -  
number of block-structured I/O buffers. Presently its 6 (for cold boot 2).
- `nfiles` -  
allowable number of open files in system. Presently 50.
- `nproc` -  
number of processes. Presently 16.
- `ntty` -  
number of tty's. Presently 9
- `orig` -
- `partab` -  
128. byte table.
- `ppb` -  
papertape punch buffer register. (See Section G, p. 38)
- `pps` -  
paper tape punch status register (See Section G, p. 37).
- `optiflg` -  
indicates the status of the paper tape file. (1 byte)  
0 - file not open  
2 - file just opened  
4 - file is normal  
6 - file not closed, error situation
- `prb` -  
paper tape reader buffer register. (See Section G, p. 37).
- `proc` -  
is a table with an entry for each possible process. The number of processes is given, by 'nproc'. Its length limits the number of processes which can be created, since it is always in core. Subtables in the process table have names beginning with "p."
- `prs` -  
paper tape reader status register. (See Section G, p. 37).
- `ps` -  
processor status register. (See Section G, p. )
- `p.break` -  
a 16 word table. Each word is associated with a unique process and contains the first core address not used by the process.

## UNIX IMPLEMENTATION

**p.dska -**

is a table of disk addresses for the swap area of the 16 processes. p.dska is 16 words long. Each word contains a block number for each process.

**p.link -**

is a 16 byte table indexed by process number. Given that a process is on the run queue, its p.link byte is 0 (in which case the process has no successors) or it contains the process number of the next process to be run after the process that owns that slot. If process number 2 was running next on the queue and process number 8 was next, the 2nd byte of the p.link table would contain an 8. This is how the next process in line is linked to the one ahead of it.

**p.pid -**

is a 16 word table that contains the unique identifier (or name) of a process. It is indexed by 2 X (the process number). The name of the process is actually a unique number.

**p.ppid -**

is the unique identifier (name) of the parent of the particular process. The table is 16 words long and is indexed by 2 X (the child's process number). This is where a child searches for its parent. Process number 2 would look in the 2nd word of the p.ppid table for its parent.

**p.stat -**

is 16 bytes long. Each byte represents the status of a process. Each byte is indexed by the process number. The status's are as follows:

0 - indicates the process is unused or free.

1 - indicates the process is active ~~free~~.

2 - indicates the process is waiting for a process to die.

3 - indicates a zombie (the process has died but it has not been waited for.)

**rcbr -**

receiver buffer register for the DC-11.

**rcsr -**

receiver status register for the DC-11. (See Section G, p. 26)

**rfap -**

address of the drum buffer I/O queue entry. It is passed as an argument to "trapt".

**rkap -**

address of the disk buffer I/O queue entry. It is used as an argument to "trapt".

**rkcs -**

control status register of the disk. (See Section G, p. 30)

## UNIX IMPLEMENTATION

- rkda -  
disk address register. (See Section G, p. 29)
- rkds -  
disk drive status register. (See Section G, p. 28)
- rootdir -  
is the i-number of the root directory. It is set to 41. by the initialization code and is never changed.
- rung -  
is a table of length 3, with one entry for each of the three ready-to-run queues of processes. The low byte of each entry contains the process number of the first process in the queue; the high byte contains the process number of the last process. The entry is 0 if there are no processes on the queue. Each queue is linked by the p.link entry in the process table (see above).
- sb0 -  
is the I/O queue entry for the super block for the permanent device (RF disk). It is 4 words long.
- sb1 -  
is the I/O queue entry for the super block for the dismountable device. It is 4 words long.
- smod -  
is a byte flag that is set whenever the super block is modified. During an exit to a user program, the super-block is written out if this flag is set.
- swp -  
is the I/O queue entry for the core image being swapped. It is 4 words long.
- sysflag -  
tells whether execution is going on inside the system or not. It is 0 if a system routine is executing and -1 if a user program is running. This is a byte flag.
- sstack -  
is a temporary stack used to store the stack during swaps.
- system -  
is the in-core image of the super block for the RF fixed head disk. It is updated onto the RF wherever it is changed. This area consists of 130. bytes of free-storage map (described in Section F, p. ), 64. bytes of I-node map (described in Section F, p. ), and 22. bytes of time accounting and error count information. Labels in this area start with 's.'
- s.charqt -  
is the time charged to users.

## UNIX IMPLEMENTATION

- s.drerr -  
is the drum error count.
- s.idlet -  
the time the system is idling.
- s.syst -  
is the overhead time during which the processor is executing  
in the operating system code.
- s.time -  
is the total time since the system was last cold booted.
- s.wait -  
is the disk I/O wait time.
- tcap -  
is the pointer to the dec tape I/O queue entry (1 word).
- tcba -  
is the bus address register of the DEC TAPE. (See Section C,  
p. 32.)
- tcbr -  
is the transmitter buffer register of the DC-11.
- tccm -  
is the command register for the DEC TAPE. (See Section C, p.  
32)
- tcdt -  
is the data register for the DEC TAPE. (See Section G, p.  
33)
- tcerrc -  
(1 word)
- tcsr -  
is the transmitter status register of the DC-11. (See Sec-  
tion G, p. 27)
- tcst -  
is the control and status register of the DEC TAPE. (See  
Section G, p. 31)
- tcstate -  
is the state of the DEC TAPE, e.g., idling, searching doing  
T/O. (1 word)
- tcwc -  
is the word count register of the DEC TAPE. (See Section C,  
p. 32)
- touts -  
is a 16. word table. Each word, if non-zero, is the entry  
point of a subroutine. The table is used to implement

*'toutt' byte is decremented, if it reaches zero*

interval timing in conjunction with the 'toutt' table described below.

- toutt -  
is a 16. byte table. Each byte is a count. At each clock interrupt each non-zero, the corresponding "touts" subroutine is called. All entries in these tables are fixed.
- tkb -  
is the tty reader buffer register. See Section G, p. 39.
- tkr -  
is the tty reader status register. See Section G, p. 39.
- tpb -  
is the tty punch buffer register. See Section G, p. 39.
- tps -  
is the tty punch status register. See Section G, p. 39.
- tty -  
contains 8 bytes for each DC-11 communications interface configured. Control and status information is kept therein. These are referred to as tty blocks. There are ntty (9) of them. The last one is for the consold tty. For their contents see F, page 11.
- ttyoch -  
is used during output to the console typewriter. (1 byte)
- user -  
is the start of each users data base. It resides just below the users core area and is swapped with the user. All locations in this section begin with "u".
- u.base -  
holds the "users buffer" address in core during read and write calls. Also points to u.dirbuf in "mkdir".
- u.break -  
holds the process program break point as set by sysexcc or by a sysbreak. It is the location at the end of the users program used in the swap routines. (1 word)
- u.bsys -  
is set while a process is about to be terminated for some error. A core image is produced. (1 byte)
- u.cdev -  
holds the device number of the users current directory. (1 word)
 

cdev	device
0	drum
1	disk
other	dectape

## UNIX IMPLEMENTATION

- u.cdir** -  
is the i-number of the processes current directory. (1 word)
- u.count** -  
is the number of bytes to be transferred during read or write operations. This variable is 1 word.
- u.dirbuf** -  
usually holds the i-number of an i-node in "maknod" and "mkdir". (The i-number of a new i-node) u.dirbuf + 2... u.dirbuf + g hold the name of the file in the directory entry.
- u.dirp** -  
is either an offset within a directory for a file mentioned by the user or a pointer to an empty directory slot during a "creat". It also points to a directory entry in "name1". (1 word)
- u.fofp** -  
is a word that contains a pointer to the 3rd word of an fsp table entry. This (3rd) word contains an offset (in bytes) into the file associated with the fsp table entry, and is used during read/write operations. In initializing special files, u.fofp points to u.off. For bread and bwrite, u.fofp contains a block number.
- u.fp** -  
is a list of users open files. An entry is either 0, for a non open file, or is an index into the systems fsp table (table of open files). Each byte in the list contains an entry. The list is 10 bytes long, because 10 is the maximum number of files a user can open at once. The index into this u.fp list is called a "file descriptor". It has a value from 0 to 9.
- u.ilgins** -  
determines handling of illegal instructions. If u.ilgins is 0 - the normal instruction trap handling is done the process is terminated and a core image is produced.
- If u.ilgins is  
  
a location - control is passed to that location when the trap occurs. This feature is used to implement the floating point instructions. (1 byte)
- u.intr** -  
determines the handling of interrupts. If u.intr is zero - interrupts (ASCII delete) are ignored.  
is one - interrupts cause there normal result, ie, force an exit.  
is a location - control is passed to that location when an interrupt occurs. (1 word)
- u.namep** -

## UNIX IMPLEMENTATION

is a pointer to a file name mentioned by a user to the system during system calls. (1 word)

**u.nread** -  
accumulates the number of bytes transmitted during read or write calls. (1 word) It is passed back in r0 on return.

**u.off** -  
is either a pointer to a file offset mentioned by a user during "seek" and "tell" calls or a pointer to an empty directory slot in "rkdir" or a pointer to a directory entry as in "sysunclink". (1 word)

**u.pri** -  
holds the process priority expressed as a pointer to one of the three run queues (in one word). If another process with higher priority becomes ready to run while this process is running, the remaining time quantum is set to zero.

**u.quit** -  
determines the handling of quits. If u.quit is:  
0 - quit signals are ignored (ASCII FS).  
1 - quits are re-enabled and cause execution to cease and a core image to be produced.  
a location - control is transferred to that location when a quit signal is received (1 byte).

**u.r0** -  
points to the location where the users r0 was stored on entry into the system (and where it will be restored on return). It is used to pick up and pass arguments. Most often it passes file descriptors. (1 word)

**u.ruid** -  
holds the real user id number. It is not changed by the set-user id bit being on in an inode during a "sysexec" (1 byte).

**u.sp** -  
is used to save the value of the users sp register after all the other registers have been saved. It is used to restore the sp when returning to a user so the system need not take care to pop everything off the stack before returning (1 word).

**u.ttyp** -  
is a pointer to the buffer of the tty that is in control of the process. The control tty (typewriter) is the only one which may quit or interrupt a process.

**u.uid** -  
holds the user id number used to determine protection (1 byte).

**u.uno** -  
is the process number. In sysfork it is the parent process

## UNIX IMPLEMENTATION

number. In "sysexit" it is the process number of the dying process. In "swap" it is the number of the process being swapped out.

u.usp -

is the contents of the sp at the moment the user is swapped out. It must be saved so that the appropriate return can take place after the user is swapped back in. (1 word)

u.quant -

is the users time quantum. It is set to 30. when a new user is swapped in. At every clock tick it is decremented. When it reaches zero the user is swapped out (1 byte).

wlist -

is a 40. byte table of "wait channels". Each byte is considered a channel. Each entry in this table is associated with a particular event. When a process wishes to wait for one of these events, it calls a routine (sleep) which enters the process number in the appropriate channel in this table. When the event occurs, another routine (wakeup) wakes up the process.

## UNIX IMPLEMENTATION

ID - uo; 2/allocate tty buffers

### FUNCTION -

Each DC-11 interface is assigned 140. bytes of buffer space, the first 140.-byte block beginning at location "buffer". Also for each interface a 4 word block of control and status type information is maintained. These 4-word blocks begin at location "tty", the fourth word in each block is a pointer to the beginning of the 140.-byte buffer assigned to that device. This section of code loads these pointers into the proper places in the tty blocks. The results are shown in the diagrams on H.O, page 3.

### CALLING SEQUENCE -

### ARGUMENTS -

### INPUTS -

ntty (number of DC-11 interfaces)

### OUTPUTS -

(see diagrams H.O page 3), r0, r1

# UNIX IMPLEMENTATION

ID - uo; 3/allocate disk buffers

## FUNCTION -

Block I/O devices (drum, disc, dectape) use blocks of size 256. words. Thus for each of "nbuf" block I/O buffers 256. words must be assigned. In addition to the 256. words for data each block has four additional words which represent an I/O queue entry. Thus each block contains 260 words. These blocks begin at location "buffer + 1260.". This segment of code loads pointers to these 260 word blocks in consecutive locations starting at "bufp". Thus "bufp" contains pointers to I/O queue entries since the first four words in each block represent the I/O queue entry for the block. Three additional I/O queue entries located at locations "sb0", "sb1", and "swp" also exist and pointers to them are also loaded into "bufp". Finally, the last 2 words of an I/O queue entry contain a word count and a bus address, these locations are initialized. The results are shown in the diagrams on H.O. page 3.

## CALLING SEQUENCE -

### ARGUMENTS -

### INPUTS -

r0 (points to first block I/O buffer)

### OUTPUTS -

(see diagrams H.O page 3) r1 (internal counter, r2 (internal pointer)


UNIX IMPLEMENTATION

UNIX IMPLEMENTATION

ID - uo; 3/free all character blocks

FUNCTION -

this segment of code initializes the cf, cl and clist blocks in core to the following state:

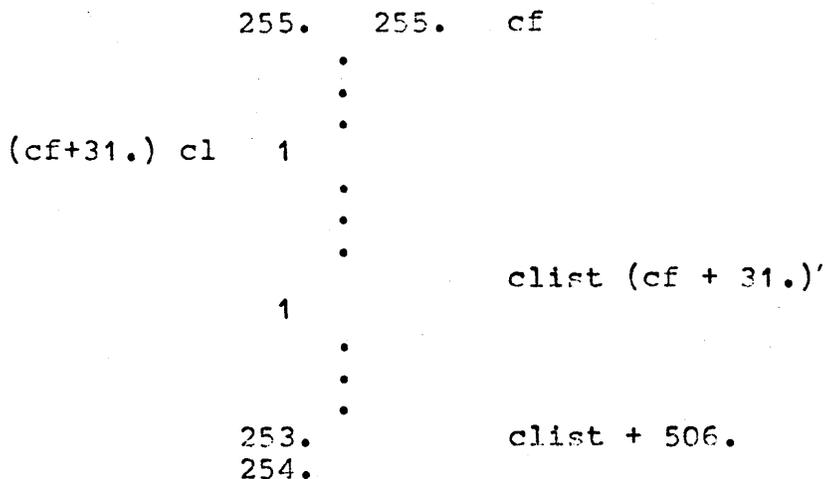

CALLING SEQUENCE -

ARGUMENTS -

INPUTS -

OUTPUTS -

CALLED BY -

CALLS - PUT

# UNIX IMPLEMENTATION

ID - uc; 3/set up drum swap addresses

## FUNCTION -

The drum is divided into 1024. blocks of 256. words. The highest 64. blocks are set aside for storing UNIX itself. Processes swapped to and from core are stored on the drum. The area in core beginning at location p.dska contains a block number which is the number of the first block on the drum where the process is swapped to. There are 17 blocks on the drum assigned as swapping area for each process.

This segment of code initializes the p.dska area in core by supplying the block numbers for each of "nproc" processes. The results appear as follows:

```
          943.  p.dska
          926.
          .
          .
          .
    960.-nproc*17.  p.dska + 2*nproc -2
```

## CALLING SEQUENCE -

ARGUMENTS -

INPUTS -

OUTPUTS -

p,dska - [p.dska + 2\*nproc -2] , r1, r2

## UNIX IMPLEMENTATION

ID - uo; 4/free rest of drum

### FUNCTION -

This portion of code is executed during 'cold' boot. (See UNIX Programmers Manual - Boot Procedures VII.) It initializes the core image of the super block for the fixed head disk. System (which represents the number of bytes in the free storage map) is set to 128. System + 130. (which represents the number of bytes in the i-node map) is set to 64.. (See Section F, pp. 1,2). Blocks 34.,...687. on the drum are freed (the corresponding bits in the free storage map are set). These blocks are for user files.

### CALLING SEQUENCE -

### ARGUMENTS -

### INPUTS -

r1 contains the number of the highest block to be freed. (See inputs for 'free'; H.5, p. 2)

### OUTPUTS -

system, system + 6, system + 8, ..., system + 85, system + 130. (See outputs for 'free'; H.5 p. 2)

ID - uo; 4/zero i-list

FUNCTION -

This portion of code is executed during 'cold' boot. (See UNIX Programmers Manual - Boot Procedures VII). It zeros blocks 1, ..., 33. on the drum. Block 1 is the 2nd block of the superblock for the drum. (Block 0 is the 1st block of the superblock. However, since the in core image of the superblock (see UNIX Implementation Manual - p. 3) is updated onto the RFO3 whenever it is changed (can be changed by a call to 'free', updated by a call to 'sysret' it does not have to be zeroed.) Blocks 2, ..., 33. are used for i-nodes 1 thru 512 (see Section F pp. 1,3,4,5.)

CALLING SEQUENCE -

ARGUMENTS -

INPUTS -

r1 contains the number of the highest block to be zeroed + 1. (See inputs for 'clear' H.3, p. 1.)

OUTPUTS -

Blocks 2, ..., 33. on disk are zeroed. (See outputs for 'clear' H.3, p. 1.)

## UNIX IMPLEMENTATION

ID U1;3 badsys

### FUNCTION -

"badsys" is called either because the user executed an illegal trap type instruction or because a t-bit trap occurred. (The t-bit is used to implement the quit function.) "badsys" first turns on the bad system flag (u.bsys) and then calls "namei" with u.namep pointing to "core". The core image file is then opened for writing via "iopen". If the file is not found, and i-node whose mode is 17 is made by "maknod", and the i-number for that node is put in r1. Parameters to write out core area then set up and the core image is written out in the users directory. Then the users area of core is written out and the file closed. sysexit is entered to terminate the process.

### CALLING SEQUENCE -

bhis badsys

### ARGUMENTS -

### INPUTS -

r1 - i-number of core image files i-node u.dirbuf contains i-number of new i-node mode by "maknod".

### OUTPUTS -

u.bsys - turn on. Its the users bad system flag.  
u.base - holds address of "core", and user during write i-calls.  
u.count - users byte count to write out.  
u.fofp - contains file offset.  
u.off - set to zero.  
r1 - has i-number of core image file.

UNIX IMPLEMENTATION

ID U1;7 error 2

FUNCTION - See 'error' routine

CALLING SEQUENCE - "

ARGUMENTS - "

INPUTS - "

OUTPUTS - "

UNIX IMPLEMENTATION

ID U1;5 error 1

FUNCTION - See 'error'

ARGUMENTS - "

CALLING SEQUENCE - "

INPUTS - "

OUTPUTS - "

## UNIX IMPLEMENTATION

ID U1;2 error

FUNCTION -

"error" merely sets the error bit of the processor status (e-bit) and then falls right into the sysret, sysrele return sequence.

CALLING SEQUENCE -

conditional branch to error.

ARGUMENTS -

INPUTS -

OUTPUTS -

processor status - c-bit is set (means error).

# UNIX IMPLEMENTATION

ID U1;9 gttv

## FUNCTION -

"gtty" is called by "sysgtty" and "sysstty". It takes the first argument of the above calls and puts it in r2. This argument is either the source or destination of information about the tty in question. The file descriptor is put in r1 and the i-number of the file is obtained via "getf". The number of the tty is gotten by (the i-number-14). If no tty with this number exists an error occurs.  $8 \times (i\text{-number}-14)$  is the tty block offset. This is outputted in r1.

## CALLING SEQUENCE -

jsr r0, gttv

## ARGUMENTS -

### INPUTS -

(u.r0) - contains the file descriptor for the tty file  
r1 - i-number of file

### OUTPUTS -

r1 - tty block offset  
r2 - source or destination of information

## UNIX IMPLEMENTATION

ID U1-4 intract

### FUNCTION -

"intract" checks to see if the process owns a quit or interrupt from the typewriter. If it owns a quit, the quit flag is cleared and the T bit (trace trap) of the processor status is set. If the interrupt character is a "del" (177), u.intr is checked to see if it is equal to the process "core". If it is, control is transferred to "core". If not, sysexit is taken.

### CALLING SEQUENCE -

br intract

### ARGUMENTS -

### INPUTS -

(sp) - contains the instruction R0 is pointing to  
u.tty - pointer to buffer of tty in control of the process  
(r1)+6 - interrupt character in the control tty's buffer  
u.intr - determines handling of interrupts (See sysintr in the UNIX Programmers Manual).

### OUTPUTS -

clock pointer is popped.

- If the interrupt char is a quit character,  
(r1)+6, the interrupt character in the control tty's buffer, is cleared  
u.quit is cleared  
T bit of ps is set

- If the interrupt char is a "del" (interrupt)  
(r1)+6 is cleared  
control is transferred to "core" if (u.intr)= core

## UNIX IMPLEMENTATION

ID U1;6 rw1

### FUNCTION -

rw1 is called by sysread and syswrite. It puts the buffer pointer (buffer) into u.base and the number of characters (nchars) into u.count. It then finds the i-number of the file to be read by getting the file descriptor in \*u.r0 and calling "getf". The i-number is returned in r1.

### ARGUMENTS -

#### INPUTS -

buffer - buffer pointer  
nchar - number of characters  
\*u.r0 - file descriptor

#### OUTPUTS -

u.base - buffer pointer  
u.count - number of characters  
r1 - contains the i-number of the file to be read

#### CALLING SEQUENCE -

jsr r0, rw1

## UNIX IMPLEMENTATION

ID U1;8 sysclose

### FUNCTION -

"sysclose", given a file descriptor in u.r0, closes the associated file. The file descriptor (index to the u.fp list) is put in r1 and "fclose" is called. (See "fclose" H.2.)

### CALLING SEQUENCE -

sysclose

### ARGUMENTS -

### INPUTS -

(u.r0) - file descriptor

### OUTPUTS -

See fclose outputs



## UNIX IMPLEMENTATION

ID U1;7 sysent;unkni

### FUNCTION -

unkni or sysent is the system entry from various traps. The trap type is determined and an indirect jump is made to the appropriate system call handler. If there is a trap inside the system a jump to panic is made. All user registers are saved and u.sp points to the end of the users stack. The sys (trap) instructor is decoded to get the system code part (see trap instruction in the PDP-11 handbook) and from this the indirect jump address is calculated. If a bad system call is made, i.e., the limits of the jump table are exceeded, "badsys" is called. If the call is legitimate control passes to the appropriate system routine.

### CALLING SEQUENCE -

through a trap caused by any sys call outside the system.

### ARGUMENTS -

arguments of the particular system call.

### INPUTS -

s.syst+2, r0, sp, r1, r2, r3, r4, r5, ac, mq, sc

### OUTPUTS -

clockp - contains, \$s.syst+2  
u.r0 - points to the location of the users r0 on the stack.  
r0 - sc saved on the stack  
u.sp - points to the end of the users stack.

## UNIX IMPLEMENTATION

ID U1;3 sysexit

### FUNCTION -

sysexit terminates a process. First each file that the process has opened is closed by "fclose". The process status is then set to unused. The p.ppid table is then searched to find children of the dying process. If any of the children are zombies, (died but not waited for) they are set free. The p.pid table is then searched to find the dying process's parent. When the parent is found, it is checked to see if it is free or it is a zombie. If its one of these, the dying process just dies. If its waiting for a child to die, it is notified that it doesn't have to wait anymore by setting its status from 2 to 1 (waiting to active). It is then awakened and put on the runq by "putlu". The dying process enters a zombie state in which it will never be run again but stays around until a "wait" is completed by its parent process. If the parent is not found, the process just dies. This means swap is called with u.uno = 0. What this does is that wswap is not called to write out the process and rswap reads a new process over the one that dies..i.e., the dying process is overwritten and destroyed.

### CALLING SEQUENCE -

sysexit or conditional branch

### ARGUMENTS -

#### INPUTS -

u.uno - the process number of the dying process  
p.pid - contains the name of the process (See F, page 10)  
p.ppid - contains the name of the parent process.  
p.stat - the status of the process.

#### OUTPUTS -

u.intr - determines handling of interrupts - it is set to 0  
all open files of the process are closed  
the process is freed  
r3 - contains the dying process's name or number  
r4 - contains its parents name  
r2 - is used to scan the process tables  
children of the dying process are freed  
r1 & r5 are used to hold the parents process number 2  
If the parent of this dying process is waiting, it is set to active and the dying process is made a zombie and the parent is put on the runq.  
u.uno is cleared and the process is killed

## UNIX IMPLEMENTATION

ID U1;5 sysfork

### FUNCTION -

sysfork creates a new process. This process is referred to as the child process. This new process core image is a copy of that of the caller of "sysfork". The only distinction is the return location and the fact that (u.r0) in the old process (parent) contains the process id (p.pid) of the new process (child). This id is used by "syswait". "sysfork" works in the following manner:

- 1) The process status table (p.stat) is searched to find a process number that is unused. If none are found an error occurs.
- 2) When one is found, it becomes the child process number and its status (p.stat) is set to active.
- 3) If the parent had a control tty, the interrupt character in that tty buffer is cleared.
- 4) The child process is put on the lowest priority run queue via "putlu".
- 5) A new process name is gotten from mpid (actually its a unique number) and is put in the child's unique identifier, the process id (p.pid).
- 6) The process name of the parent is then obtained and placed in the unique identifier of the parent process of the child (p.ppid). The parent process name is then put in (u.r0).
- 7) The child process is then written out on disk by "wswap", i.e., the parent process is copied onto disk and the child is born.
- 8) The parent process number is then restored to u.uno.
- 9) The child process name is put in (u.r0).
- 10) The pc on the stack sp + 18 is incremented by 2 to create the return address for the parent process.
- 11) The u.fp list is then searched to see what files the parent has opened. For each file the parent has opened, the corresponding fsp entry must be updated to indicate that the child process also has opened the file. A branch to sysret is then made.

CALLING SEQUENCE -  
from shell?

ARGUMENTS -

INPUTS -

- p.stat - status of a process active, dead, unused.
- u.uno - parent process number.
- u.ttyp - pointers to parents process control tty buffer.
- mpid - process name generator
- u.fp - list index into the tsp table.
- fsp - table of open files.

OUTPUTS -

- p.stat - byte for child, process is set to active if control
- tty for parent exists buffer + 6 is cleared child process
- number is put on rung + 4.

## UNIX IMPLEMENTATION

p.pid - appropriate entry in this table contains the name of the child process.

The child process is written out on drum with u.uno being the child's process number and (u.r0) containing the parents process name.

u.uno - is restored to the parents process number.

(u.r0) - contains the child's process name.

sp+18 - gets 2 added to it to change the return address of the parent.

fsp+6 - "number of processes that have opened this file" byte gets incremented in the particular fsp entry.

## UNIX IMPLEMENTATION

ID U1;9 sysgtty

### FUNCTION -

"sysgtty" gets the status of the tty in question. It stores in the three words addressed by its argument the status of the typewriter whose file descriptor is in (u.r0).

### CALLING SEQUENCE -

sysgtty; org

### ARGUMENTS -

arg - address of 3 word destination of status

### INPUTS -

r1 - tty block offset  
r2 - destination of status data  
rcsr+r1 - reader control status  
tcsr+r1 - printer control status register  
tty+4+r1 - flag byte in tty block which contains the mode.

### OUTPUTS -

(r2) - contains the reader control status  
(r2)+2 - contains the printer control status  
(r2)+4 - contains the mode control status

## UNIX IMPLEMENTATION

ID U1;8 sysmdate

### FUNCTION -

"sysmdate" is given a file name. It gets the i-node of this file into core. The user is checked to see if he is the owner or the super user. If he is neither an error occurs. "setimod" is then called to set the i-node modification byte and the modification time, but the modification time is overwritten by whatever got put on the stack during a "sys-time" call (see systime). These calls are restricted to the super user.

### CALLING SEQUENCE -

sysmdate; name

### ARGUMENTS -

name - pointer to a file name

### INPUTS -

u.uid - users id  
i.uid - owners id  
sp+4 - time set by super user  
sp+2 -

### OUTPUTS -

i.mtim - new modification time of the file  
i.mtim +2 - new modification time of the file

## UNIX IMPLEMENTATION

ID U1;8 sysmkdir

### FUNCTION -

"sysmkdir" creates an empty directory whose name is pointed to by arg 1. The mode of the directory is arg 2. The special entries "." and ".." are not present. Errors are indicated if the directory already exists, or the user is not the super user.

### CALLING SEQUENCE -

sysmkdir; name; mode

### ARGUMENTS -

name - points to the name of the directory  
mode - mode of the directory

### INPUTS -

u.uid - user id; if its 0 the user is the super user  
(sp) - contains the second argument "mode"

### OUTPUTS -

makes an i-node for the directory via "maknod"  
sets up the flag in the directory i-node  
    set user id on execution  
    executable  
    directory

## UNIX IMPLEMENTATION

ID U1;6 sysopen

### FUNCTION -

"sysopen" opens a file in the following manner:

- 1) The second argument in a sysopen calls says whether to open the file to read (0) or write ( $\neq 0$ ).
- 2) The i-node for the particular file is obtained via "namei".
- 3) The file is then opened by "iopen".
- 4) Next housekeeping is performed on the fsp table and the users open file list - u.fp.
  - a) u.fp and fsp are scanned for the next available slot.
  - b) An entry for the file is created in the fsp table.
  - c) The number of this entry is put on the u.fp list.
  - d) The file descriptor index to the u.fp list is pointed to by u.r0.

### CALLING SEQUENCE -

sys open; name; mode

### ARGUMENTS -

name - file name or path name  
mode - 0 - open for reading  
      1 - open for writing

### INPUTS -

r1 - contains an I-number (positive or negative depending on whether and open for read or open for write is desired).

### OUTPUT -

entry in fsp table and u.fp list  
\*u.r0 - index to u.fp list (the file descriptor) is put into r0's location on the stack.  
r2 - used as a counter through the u.fp list.  
r3 - used as a pointer to the beginning of an fsp entry.

## UNIX IMPLEMENTATION

ID U1;6 sysread

### FUNCTION -

sysread is given a buffer to read into and the number of characters to be read. It finds the file from the file descriptor located in \*u.r0 (r0). This file descriptor is returned from a successful open call. (See sysopen H.1, page 1.) The i-number of the file is obtained via "rw1" and the data is read into core via "readi".

### CALLING SEQUENCE -

sysread; buffer; nchars. ARGUMENTS -  
buffer - location of contiguous bytes where input will be placed.  
nchars - number of bytes or characters to be read.

### INPUTS -

r1 - contains i-number of file to be read.

### OUTPUTS -

\*u.r0 contains the number of bytes read.

## UNIX IMPLEMENTATION

ID U1;2 sysrele

### FUNCTION -

"sysrele" first calls tswap if the time quantum for a user is zero (see sysret). It then restores the users registers and turns off the system flag. It then checked to see if there is an interrupt from the user by calling "isintr". If there is the output gets flushed (see isintr) and interrupt action is taken by a branch to intract. If there is no interrupt from the user a rti is made.

### CALLING SEQUENCE -

fall through a "bne" in sysret & ?

### ARGUMENTS -

### INPUTS -

stack  
(s.chrpt+2) ?

### OUTPUTS -

sc, mq, ac, r5, r4, r3, r2, r1, r0 restored.  
sysflag - turned off  
clockp - points to s.chrpt+2

## UNIX IMPLEMENTATION

ID U1;2 sysret

### FUNCTION -

sysret first checks to see if the process is about to be terminated (u.bsyz). If it is sysexit is called. If not the following happens:

- 1) The users stack pointer is restored.
- 2) r1=0 and "iget" is called to see if the last mentioned i-node has been modified. If it has it is written out.
- 3) If the super block has been modified, it is written out via "ppoke".
- 4) If the dismountable file system's super block has been modified it is written out to the specified device via "ppoke".
- 5) A check is made to see if the users time quantum (u-quant) ran out during his execution. If so, "tswap" is called to give another user a chance to run.
- 6) sysret now goes into sysrele. (See sysrele for conclusion.)

### CALLING SEQUENCE -

jump table or brsysret

### ARGUMENTS -

#### INPUTS -

u.bsyz - user's bad system flag  
u.sp - user's stack pointer  
r1 - used internally - set to 0 for "iget" call  
smod - set if super block has been modified  
mmod - set if dismountable file systems super block has been modified  
u.quant - user's time quantum

#### OUTPUTS -

sp - points to users stack  
smod - cleared if it was set  
minod - cleared if it was set  
sb0 - write bit is set during execution of sysret  
sb1 - write bit is set during execution of sysret

UNIX IMPLEMENTATION

ID U1;5 sysret 1

FUNCTION - see 'sysret'

CALLING SEQUENCE - "

ARGUMENTS - "

INPUTS - "

OUTPUTS - "

UNIX IMPLEMENTATION

ID U1;7 sysret 2

FUNCTION - see 'sysret' routine

CALLING SEQUENCE - "

ARGUMENTS - "

INPUTS - "

OUTPUTS - "

ID U1;9 sysstty

FUNCTION -

"sysstty" gets the status and mode of the typewriter whose file descriptor is in (u.r0). First "gty" is called to get the tty block and the source of the status information. "getc" is called until the input clist is flushed. The output character list is checked. If some characters are on it, the process is put to sleep and the input list is checked again. If there are no characters, the information in the source is put into the reader control status, printer control status registers and the tty's flag byte in the tty block.

CALLING SEQUENCE -

sysstty; arg.

ARGUMENTS -

arg. - address of three consecutive words that contain the source of the status data.

INPUTS -

r1 - offset to tty block.  
 r2 - points to the source of the status information. See arg. above.  
 r1+tty+3 - contains the cc offset.  
 r3 - used to transfer the source information to the tty status registers and block.

OUTPUTS -

ps - set to 5  
 rcsr+r1 - contains new reader control status  
 tcsr+r1 - contains new printer control status  
 tty+4+r1 - contains new mode in the flag byte of the tty block.

# UNIX IMPLEMENTATION

ID U1;4 syswait

## FUNCTION -

syswait waits for a process to die. It works in the following way:

1) from the parent process number, the parents process name is found. The p.ppid table of parent names is then searched for this process name. If a match occurs r2 contains the child's process number. The child's status is checked to see if its a zombie, i.e., dead but not waited for, (p.stat=3). If it is, the child process is freed and its name is put in (u.r0). A return is then made via "sysret". If the child is not a zombie, nothing happens and the search goes on through the p.ppid table until all processes are checked or a zombie is found.

2) If no zombies are found, a check is made to see if there are any children at all. If there are none an error return is made. If there are, the parents status is set to 2 (waiting for child to die), the parent is swapped out and a branch to syswait is made to wait on the next process.

## CALLING SEQUENCE -

?

## ARGUMENTS -

## INPUTS -

u.uno - parent process number (process number of process in core)  
p.pid - table of names of processes  
p.ppid - table of parents names of processes.  
p.stat - contains status of process

- 0 - free or unused
- 1 - active
- 2 - waiting for process to die
- 3 - zombie

## OUTPUTS -

r2 - used as index to p.pid, p.ppid, p.stat tables  
r3 - used to keep track of the number of children  
r1 - has parents process number  
If zombie found - its status p.stat is freed (set to 0)  
- its name is put in (u.r0)  
If no zombies found - status of parent is set to 2  
(waiting for child to die)  
- parent is swapped out

## UNIX IMPLEMENTATION

ID U1-6 syswrite

### FUNCTION -

syswrite is given a buffer to write, onto an output file and the number of characters to write. It finds the file from the file descriptor located in \*u.r0 (r0). This file descriptor is returned from a successful open or creat call (see sysopen or syscreat). The i-number of the file is obtained via "rw1" and the buffer is written on the output file via "write1".

### CALLING SEQUENCE -

syswrite; buffer; nchar

### ARGUMENTS -

buffer - location of contiguous bytes to be written  
nchar - number of characters to be written

INPUTS - r1 - contains the i-number of the file to be written on

### OUTPUTS -

\*u.r0 - contains the number of bytes written

# UNIX IMPLEMENTATION

ID U2-9 anyi

## FUNCTION -

"anyi" is called if a file has been deleted while open. "anyi" checks to see if someone else has opened this file. It searches the fsp table for an i-number contained in r1. If that i-number is found (if someone else opened the file) the "file deleted" flag in the upper byte of the 4th word of the fsp entry is incremented (see F, page 8). In other words the deleted flag is passed onto the other entry of this file in the fsp table. Note: The same file may appear more than once in the fsp table.

If the i-number is not found in the fsp table (no one else has opened the file) the corresponding bit in the i-node map is cleared freeing that i-node and all blocks related to that i-node.

## CALLING SEQUENCE -

jsr r0, anyi

## INPUTS -

r1 - contains an i-number  
fsp - start of table containing open files  
r2 - points to the i-number in an fsp entry

## OUTPUTS -

"deleted" flag set in fsp entry of another occurrence of this file and r2 points to 1st word of this fsp entry.

if file not found - bit in i-node map is cleared  
(i-node is freed)  
- all blocks related to i-node are freed  
- all flags in i-node are cleared

## UNIX IMPLEMENTATION

ID U2-6 arg

### FUNCTION -

arg extracts an argument for a routine whose call is of form:

sys 'routine'; arg1  
or  
sys 'routine'; arg1; arg2  
or  
sys 'routine'; arg1;...; arg10 (sysexec)

### CALLING SEQUENCE -

jsr r0, arg; 'address'

### ARGUMENTS -

'Address' - address in which extracted argument is stored

### INPUTS -

u.sp+18 - Contains a pointer to one of arg1,..., argn. This pointer's value is actually the value of the updated pc at the time the trap to sysent (unkni) is made to process the sys instruction.

r0 - Contains the return address for the routine that called arg. The data in the word pointer to by the return address is used as the address in which the extracted argument is stored.

### OUTPUTS -

'address' - Contains the extracted argument

u.sp+18 - is incremented by 2.

r1 - Contains the extracted argument

r0 - Points to the next instruction to be executed in the calling routine.

### CALLS -

### CALLED BY -

rw1, sysent, sysilgins, sysmdate, gtty, sysunlink, sysfstat, syschdir, arg2, sysbreak, seektell, sysintr, sysquit, sysumount

# UNIX IMPLEMENTATION

ID U2-7 arg2

## FUNCTION -

Takes first arg. in system call (pointer to name of file) and puts it in location u.namep; takes second arg and puts it in u.off and on top of the stack.

## CALLING SEQUENCE -

jsr r0, arg2

## ARGUMENTS -

## INPUTS -

u.sp, r0

## OUTPUTS -

u.namep

u.off

u.off pushed on stack

r1

UNIX IMPLEMENTATION

ID U2-4 error 3

FUNCTION - See 'error' routine

CALLING SEQUENCE - "

ARGUMENTS - "

INPUTS - "

OUTPUTS - "

UNIX IMPLEMENTATION

ID U2-1 error 4

FUNCTION - See 'error' routine

CALLING SEQUENCE - "

ARGUMENTS - "

INPUTS "

OUTPUTS - "

UNIX IMPLEMENTATION

ID U2-1 error 9

FUNCTION - See 'error' routine

CALLING SEQUENCE - "

ARGUMENTS - "

INPUTS - "

OUTPUTS - "

ID U2-9 fclose

## FUNCTION -

Given the file descriptor (index to the u.fp list), "fclose" first gets the i-number of the file via "getf". If the i-node is active (i-number  $\neq$  0) the entry in the u.fp list is cleared. If all the processes that opened that file close it, then the fsp entry is freed and the file is closed. If not, a return is taken. If the file has been deleted while open (see "deleted flag" F, page 8) "anyi" is called to see if anyone else has it open, i.e., see if it appears in another entry in the fsp table (see "anyi" for details H.2 page 0). Upon return from "anyi" a check is made to see if the file is special.

## CALLING SEQUENCE -

jsr r0, fclose

## ARGUMENTS -

## INPUTS -

r1 - contains the file descriptor (value = 0, 1, 2....9)  
 u.fp - list of entries in the fsp table  
 fsp - table of entries (4 words/entry) of open files.  
 (see F, page 8)

## OUTPUTS -

r1 - contains the same file descriptor it entered with  
 if all processes that open file close it, the fsp entry  
 is freed and the file is closed.  
 if "anyi" is called the outputs in "anyi" occur (H.2, page 0)  
 the "number of processes" byte in the fsp entry is decremented  
 (see F, page 8)  
 r2 - contains i-number.

## UNIX IMPLEMENTATION

ID U2-4 getf

### FUNCTION -

"getf" first checks to see that the user has not exceeded the maximum number of open files (10.) If he has an error occurs. If not, the index into the fsp table is calculated from the u.fp list: u.fofp contains the address of the 3rd word in that fsp entry. (The file offset. See E, page 8) cdev and r1 contain the device and i-number of the file.

### CALLING SEQUENCE -

jsr r0, getf

### ARGUMENTS -

### INPUTS -

r1 - contains index into u.fp list

### OUTPUTS -

u.fofp - contains address of 3rd word in that fsp entry.  
cdev - contains files device number  
r1 - contains files i-number.

# UNIX IMPLEMENTATION

ID U2-3 "isdir"

## FUNCTION -

"isdir" checks to see if the i-node whose i-number is in r1, is a directory. If it is, an error occurs, because "isdir" is called by syslink and sysunlink to make sure directories are not linked. If the user is the super user (u.uid = 0), "isdir" does not bother checking. The current i-node is not disturbed.

## CALLING SEQUENCE -

jsr r0, isdir

## ARGUMENTS -

## INPUTS -

r1 - contains the i-number whose i-node is being checked.  
u.uid - user id  
ii - current i-node number  
i.flgs - flag in i-node (this is tested to see if the i-node is a directory i-node)

## OUTPUTS -

r1 - contains current i-number upon exit  
current i-node back in core

## UNIX IMPLEMENTATION

ID U2-6 isown

### FUNCTION -

"isown" is given a file name. It finds the i-number of that file via "namei" then gets the i-node into core via "iget". It then tests to see if the user is the super user. If not, it checks to see if the user is the owner of the file. If he is not, an error occurs. If user is the owner "setimod" is called to indicate the i-node has been modified and the 2nd argument of the call is put in r2.

### CALLING SEQUENCE -

jsr r0, isown

### ARGUMENTS -

### INPUTS -

arguments of syschmod or syschown calls

### OUTPUTS -

u.uid - id of user

imod - set to a 1

r2 - contains second argument of the system call

## UNIX IMPLEMENTATION

ID U2-7 maknod

### FUNCTION -

maknod creates an i-node and makes a directory entry for this i-node in the current directory. It gets the mode of the i-node in r1 the name is used in mkdir for the directory entry (see mkdir E.2). The i-node is made in the following manner. First the allocate flag is set in the mode. A scan of i-nodes above 0 begins. The i-node map is checked to see if that i-node is active. If it is the next i-node in the bit map is checked until a free one is found. If one is found a check is made to see if it is already allocated. If it is, the search continues. If not the i-number is put in u.dir bit and a directory entry is made via mkdir. Then the new i-node is fetched into core and its parameters are set (see outputs).

### CALLING SEQUENCE -

jsr r0, mknod

### ARGUMENTS -

#### INPUTS -

r1 - contains mode ii - current i-number - should be at the current directory mg, r2 - bit position & byte address in i-node map

#### OUTPUTS -

u.dirbit - contains i-number of free i-node  
i.flgs - cflag in new i-node  
i.uid - filled with u.uid  
i.nlks - 1 is put in the number of links  
i.ctim - creation time  
i.ctim+2 - modification time  
imod - set via call to setimod

## UNIX IMPLEMENTATION

ID U2-2 mkdir

### FUNCTION -

"mkdir" makes a directory entry from the name pointed to by u.unamep into the current directory. It first clears the locations u.dirbuf+2 - u.dirbuf+10. "mkdir" then moves a character at a time into u.dirbuf+2 - u.dirbuf+10, checking each time to see if the character is a "/". If it is an error occurs, because "/" should not appear in a directory name.

A pointer to an empty directory slot is then put in u.off. The current directory i-node is brought into core and an entry is written into the directory.

### ARGUMENTS -

#### INPUTS -

r2, u.unamep - points to a file name that is about to become a directory entry.  
r3 - points to u.dirbuf locations.  
ii - current directory's i-number.

#### OUTPUTS -

u.dirbuf+2 - u.dirbuf+10 - contains file name  
u.off - points to entry to be filled in the current directory  
u.base - points to start of u.dirbuf  
r1 - contains i-number of current directory  
See wdir for others.

## UNIX IMPLEMENTATION

ID U2-4 namei

### FUNCTION -

"namei" takes a file path name (address of string in u.namep) and searches the current directory or the root directory (if the first character in the string pointed to by u.namep is a "/") and returns the i-number for the file in r1. namei operates in the following manner:

A file may be referenced in one of two ways; either relative to the users directory or relative to the rootdir directory; in the second case the file path name must begin with the char /. Whenever a / is encountered in a path name it indicates that the characters preceding it represent the path name of a directory, and the file name following the / is stored in that directory.

Directories contain 10 byte entries, the first 2 bytes contain an i-number, the last 8 bytes a file name associated with the i-number.

namei scans the file path name until it reaches a "/" or a nul it reads the current directory until it finds a file name which matches the scanned portion of the file path name. When a match is found, the i-number is taken from the matched directory entry. If namei has scanned to a nul then the i-number is that for the file specified by the file path name. If namei scanned to a "/" then the i-number is that of the next directory in the path. namei scans the file path name until it reaches a "/" or a nul, etc. If no file is found return to nofile; otherwise normal.

### CALLING SEQUENCE -

jsr r0, namei; nofile; normal:

### ARGUMENTS -

#### INPUTS -

u.namep (points to a file path name)  
u.cdir (i-number of users directory)  
u.cdev (device number on which user directory resides)  
r1 - contains the i-number of the current directory (u.edir)

#### OUTPUTS -

r1 (i-number of file referenced by file path name)  
cdev  
r2, r3, r4 (internal)  
u.dirb - points to the directory entry where a match occurs in the search for the file path name.  
If no match u.dirb points to the end of the directory and  
r1 = i-number of the current directory

## UNIX IMPLEMENTATION

ID U2-8 seektell

### FUNCTION -

seektell puts the arguments from a sysseek and systell call in u.base and u.count. It then gets the i-number of the file from the file descriptor in \*u.r0 and by calling getf. The i-node is brought into core and then u.count is checked to see if it is a 0, 1 or 2.

If it is 0 - u.count stays the same

1 - u.count = offset (u.fofp)

2 - u.count = i.size size of file

### CALLING SEQUENCE -

jsr r0, seektell

### ARGUMENTS -

#### INPUTS -

u.base - puts offset from sysseek or systell call  
u.count - put pfname from sysseek or systell call  
\*u.r0 - contains file descriptor (index to u.fp list)  
i.size - size of file in bytes  
\*u.fofp - points to 3rd word of fsp entry

#### OUTPUTS -

an i-node in core via "iget"  
r1 - i-number of file in question  
u.count - see function above

## UNIX IMPLEMENTATION

ID U2-7 sysbreak

### FUNCTION -

"sysbreak" sets the programs break point. It checks the current break point (u.break) to see if it is between "core" and the stack (sp). If it is, it is made an even address (if it was odd) and the area between u.break and the stack is cleared. The new breakpoint is then put in u.break and control is passed to "sysret".

### CALLING SEQUENCE -

sysbreak; addr

### ARGUMENTS -

addr - address of the new break point

### INPUTS -

u.break - the current break point

### OUTPUTS -

u.break - contains new break point  
area between old u.break and "stack" is cleared if u.break is between "core" and the stack "sp".

## UNIX IMPLEMENTATION

ID U2-6 syschdir

### FUNCTION -

syschdir makes the directory specified in its argument the current working directory.

### CALLING SEQUENCE -

syschdir; name

### ARGUMENTS -

name - address of the path name of a directory terminated by a nul byte.

### INPUTS -

i.flgs - i-node flag  
r1 - contains i-number  
cdev - contains device number of i-node

### OUTPUTS -

r1 - contains i-number  
u.cdir - i-number of users current directory (same as r1)  
u.cdev - device number of current directory

## UNIX IMPLEMENTATION

ID U2-2 sysexec

### FUNCTION -


sysexec initiates execution of a file whose path name is pointed to by "name" in the sysexec call. sysexec performs the following operations:

1. obtains i-number of file to be executed via "namei".
2. obtains i-node of file to be executed via "iget".
3. sets trap vectors to system routines.
4. loads arguments to be passed to executing file into highest locations of user's core.
5. puts pointers to arguments in locations immediately following arguments.
6. save number of arguments in next location.
7. initializes user's stack area so that all registers will be zeroed and the PS cleared and the PC set to core when sysret restores registers and does an rti.
8. initializes u.ro and u.sp.
9. zeros user's core down to u.ro.
10. reads in executable file from storage device into core starting at location "core".
11. sets u.break to point to end of user's code with data area appended.
12. calls "sysret" which returns control at location "core" via rti instruction.

continued on page 17

UNIX IMPLEMENTATION

The layout of core when sysexec calls sysret is:

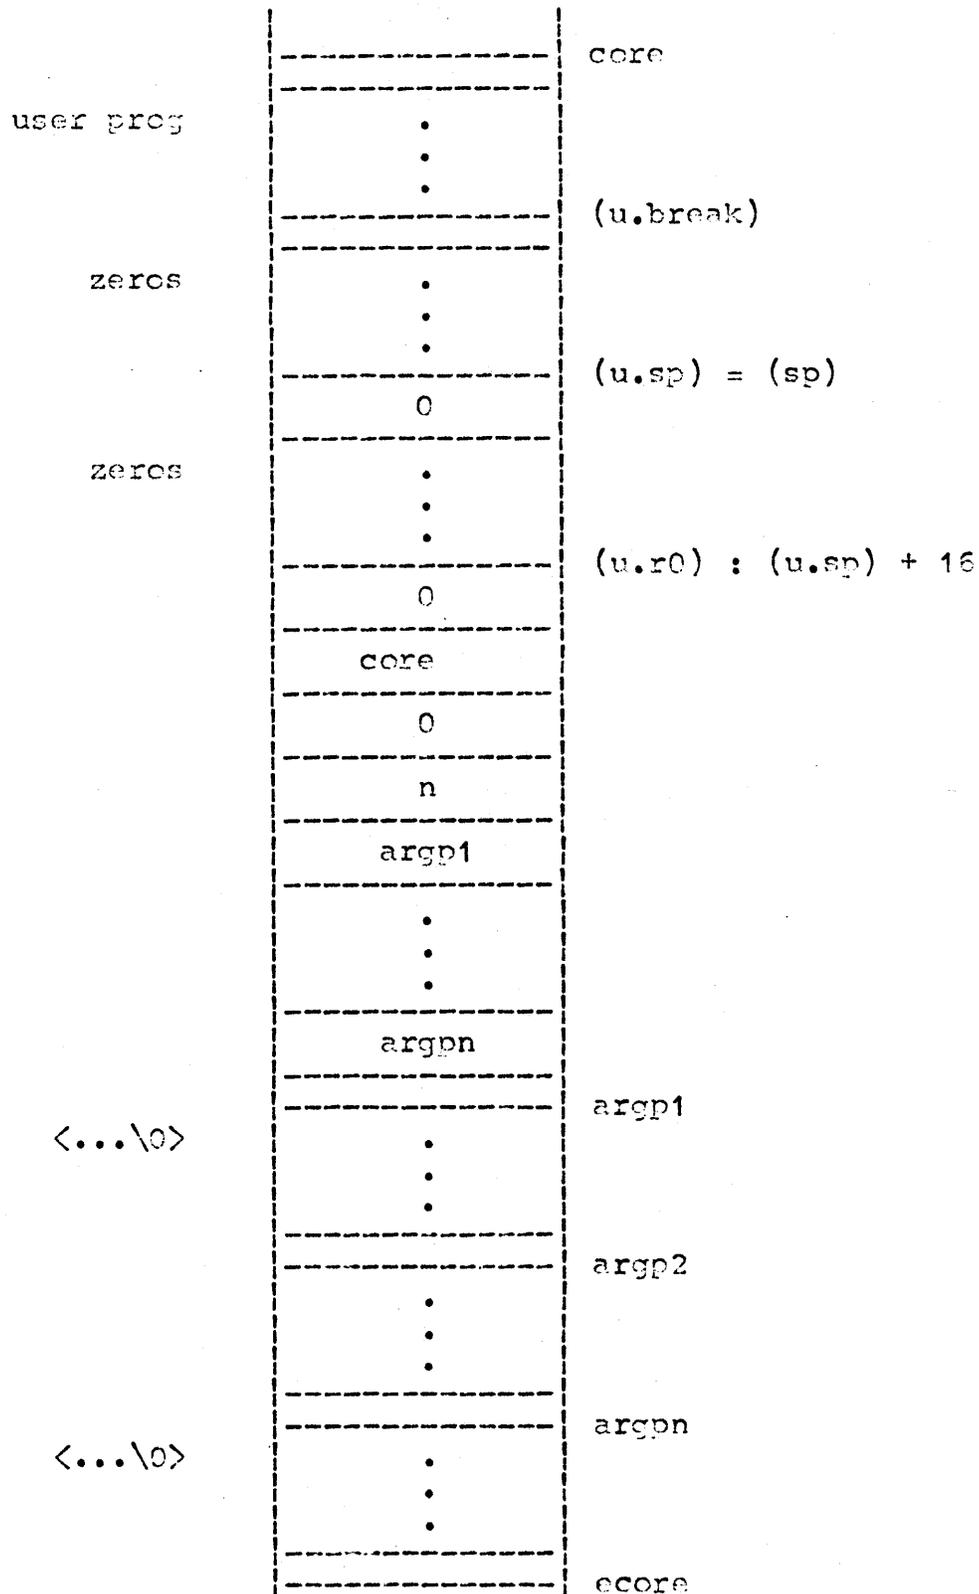

## UNIX IMPLEMENTATION

### CALLING SEQUENCE -

sys exec; namep; argp

### ARGUMENTS -

namep (points to file path name of file to be executed)  
argp (address of table of argument pointers)  
argp1, ..., argpn (table of argument pointers)  
argp1: <...0>, argp2: <...0>, ..., argpn: <...0> (argument strings)

### INPUTS -

namep  
argp

### OUTPUTS -

## UNIX IMPLEMENTATION

ID U2-4 sysfstat

### FUNCTION -

"sysfstat" is identical to "sysstat" except that it operates on open files instead of files given by name. It puts the buffer address on the stack, gets the i-number and checks to see if the file is open for reading or writing. If the file is open for writing (i-number is negative) the i-number is set positive and a branch into sysstat is made.

### CALLING SEQUENCE -

sysfstat; buf

### ARGUMENT -

buf - buffer address

### INPUTS -

(u.r0) file descriptor

### OUTPUTS -

buffer is loaded with file information. See UNIX Programmers Manual under sysstat (II) for format of the buffer.

## UNIX IMPLEMENTATION

ID U2-2 sysgetuid

### FUNCTION -

"sysgetuid" returns the real user ID of the current process. The real user ID identifies the person who is logged in, in contradistinction to the effective user ID, which determines his access permission at each moment. It is thus useful to programs which operate using the "set user ID" mode, to find out who invoked them.

### CALLING SEQUENCE -

sysgetuid

### ARGUMENTS -

### INPUTS -

u.ruid - real users id

### OUTPUTS -

(u.r0) - contains the real users id.

## UNIX IMPLEMENTATION

ID U2-8 sysintr

### FUNCTION -

"sysintr" sets the interrupt handling value. It puts the argument of its call in u.intr. "sysintr" then branches into the "sysquit" routine. u.tty is checked to see if a control tty exists. If one does the interrupt character in the tty buffer is cleared and sysret is called. If one does not exist sysret is just called.

### CALLING SEQUENCE -

sysintr; arg

### ARGUMENT -

- arg - if 0, interrupts (ASCII DELETE) are ignored.
- if 1, interrupts cause their normal result, i.e., force an exit.
- if arg is a location within the program, control is passed to that location when an interrupt occurs.

### INPUTS -

u.tty - pointer to control tty buffer.

### OUTPUTS -


u.intr has value of arg.  
(r1)+6 (interrupt char in tty buffer) is cleared if a control tty exists.

# UNIX IMPLEMENTATION

ID U2-1 syslink

## FUNCTION -

syslink is given two arguments, name 1 and name 2. name 1 is a file that already exists. name 2 is the name given to the entry that will go in the current directory. name 2 will then be a link to the name 1 file. The i-number in the name 2 entry of the current directory is the same i-number for the name 1 file. At the end of a syslink call the following structure is constructed.

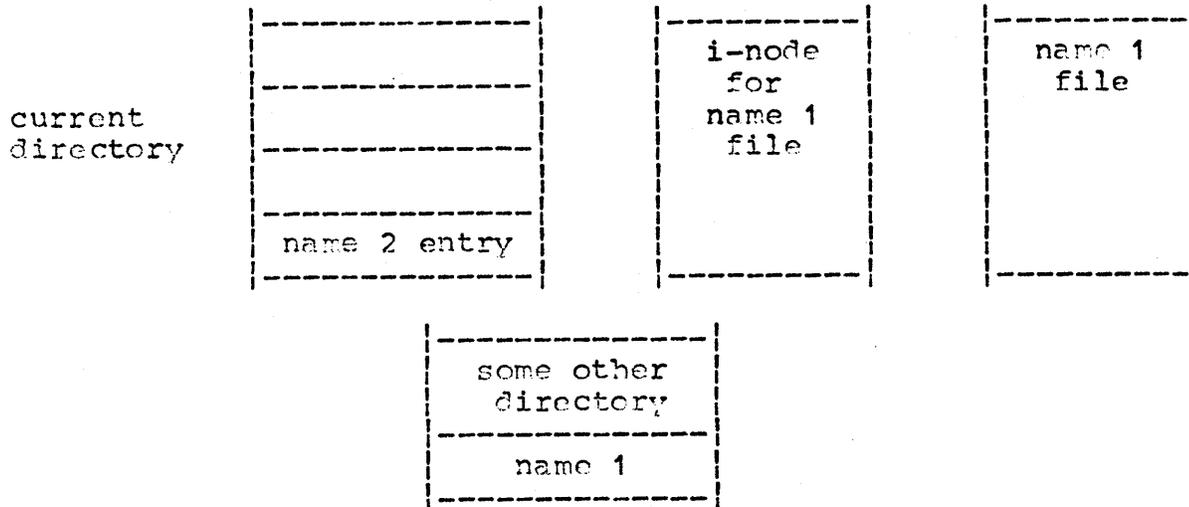

## CALLING SEQUENCE -

syslink; name1; name2

## ARGUMENTS -

name 1 - file name to which link will be created.  
name 2 - name of entry in current directory that links to name 1.

## INPUTS -

u.namep - points to the arguments above.

## OUTPUTS -

entry in the current directory with name, name 2.  
r1 - contains i-number of name 1 on exit and i-number of current directory intermittently during subr.  
i.nlks - incremented by 1 to indicate another link added.  
imod - set by call to setimod.

## UNIX IMPLEMENTATION

ID U2-3 sysquit

### FUNCTION -

sysquit turns off the quit signal. It puts the argument of the call in u.quit. u.tty is checked to see if a control tty exists. If one does, the interrupt character in the tty buffer is cleared and sysret is called. If one does not exist, sysret is just called.

### CALLING SEQUENCE -

sysquit; arg

### ARGUMENT -

- arg - if 0 this call disables quit signals from the typewriter (ASC11 FS).
- if 1, quits are re-enabled and cause execution to cease and a core image to be produced.
- if an address in the program, a quit causes control to be sent to that location.

### INPUTS -

u.tty - pointer to control tty buffer.

### OUTPUTS -

u.quit - has value of arg  
(r1)+6 - (interrupt char in tty buffer) is cleared if a control tty exists.

UNIX IMPLEMENTATION

ID U2-4 sysret 3

FUNCTION - See "sysret" routine

CALLING SEQUENCE - "

ARGUMENTS - "

INPUTS - "

OUTPUTS - "

UNIX IMPLEMENTATION

ID U2-1 sysret 4

FUNCTION - See "sysret" routine

CALLING SEQUENCE - "

ARGUMENTS - "

INPUTS - "

OUTPUTS - "

UNIX IMPLEMENTATION

ID U2-1 sysret 9

FUNCTION - See "sysret" routine

CALLING SEQUENCE - "

ARGUMENTS - "

INPUTS - "

OUTPUTS - "

## UNIX IMPLEMENTATION

ID U2-3 sysseek

### FUNCTION -

sysseek changes the r/w pointer (3rd word in an fsp entry) of an open file whose file descriptor is in u.r0.

The file descriptor refers to a file open for reading or writing. The read (or write) pointer for the file is set as follows:

if ptrname is 0, the pointer is set to offset.

if ptrname is 1, the pointer is set to its current location plus offset.

if ptrname is 2, the pointer is set to the size of the file plus offset.

The error bit (e-bit) is set for an undefined file descriptor.

### CALLING SEQUENCE -

sysseek; offset; ptrname

### ARGUMENTS -

offset - number of bytes desired to move the r/w pointer by  
ptrname - a switch indicated above

### INPUTS -

u.base  
u.count (Sec seektell)

### OUTPUTS -

u.fofp - points to the r/w pointer in the fsp entry.  
The r/w pointer is changed according to offset and ptrname.

## UNIX IMPLEMENTATION

ID U2-4 sysstat

### FUNCTION -

"sysstat" gets the status of a file. Its arguments are the name of the file and a buffer address. The buffer is 34 bytes long and information about the file is placed in it. sysstat calls "namei" to get the i-number of the file. Then "iget" is called to get the i-node in core. The buffer is then loaded and the results are given in the UNIX Programmers Manual sysstat (II).

### CALLING SEQUENCE -

sysstat; name; buf

### ARGUMENTS -

name - points to the name of the file  
buf - address of a 34. byte buffer

### INPUTS -

sp - contains the address of the buffer  
r1 - i-number of file

### OUTPUTS -

buffer is loaded with file information.

## UNIX IMPLEMENTATION

ID U2-9 syssetuid

### FUNCTION -

"syssetuid" sets the user id u.uid of the current process to the process id (u.r0). Both the effective user and u.uid and the real user u.ruid are set to this. Only the super user and make this call.

### CALLING SEQUENCE -

syssetuid

### ARGUMENTS -

#### INPUTS -

(u.r0) - contains the process id  
u.ruid - real user id  
u.uid - effective current user id

#### OUTPUTS -

u.ruid - set equal to the process id (u.r0)  
u.uid - set equal to the process id (u.r0)

## UNIX IMPLEMENTATION

ID U2-7 sysstime

FUNCTION -

"sysstime" sets the time. Only the super user can use this call.

CALLING SEQUENCE -

sysstime

ARGUMENTS -

INPUTS -

sp+2, sp+4 time system is to be set to.

OUTPUTS -

s.time, s.time+2 new time system is set to.

# UNIX IMPLEMENTATION

ID U2-7 systime

FUNCTION -

"systime" gets the time of the year. The present time is put on the stack.

CALLING SEQUENCE -

systime

ARGUMENTS -

INPUTS -

s.time, s.time+2 - present time

OUTPUTS -

sp+2, sp+4 - present time

## UNIX IMPLEMENTATION

ID U2-1 sysunlink

### FUNCTION -

"sysunlink" removes the entry for the file pointed to by name from its directory. If this entry was the last link to the file, the contents of the file are freed and the file is destroyed. If, however, the file was open in any process, the actual destruction is delayed until it is closed, even though the directory entry has disappeared.

The error bit (e-bit) is set to indicate that the file does not exist or that its directory cannot be written. Write permission is not required on the file itself. It is also illegal to unlink a directory (except for the super-user).

### CALLING SEQUENCE -

syslink; name

### ARGUMENTS -

name - name of directory entry to be removed

### INPUTS -

u.namep - points to name  
r1 - i-number associated with name

### OUTPUTS -

i.nlks - number of links to file gets decremented  
u.off - gets moved back 1 directory entry  
imod - gets set by call to setimod  
if name was last link contents of file freed and file destroyed  
entry "name" in directory is free (its first word that usually contains an i-number is zeroed).

## UNIX IMPLEMENTATION

ID U2-2 wdir

### FUNCTION -

wdir - write a directory entry into the current directory whose i-number is in ii.

### CALLING SEQUENCE -

jsr r0, wdir - in syslink  
follows mkdir directly

### ARGUMENTS -

### INPUTS -

u.dirbuf - address of where name of directory is kept  
ii - contains the current directory's i-number

### OUTPUTS -

an entry in the current directory  
u.base - points to u.dirbuf  
u.count - = 10  
r1 - contains the current directory's i-number

## UNIX IMPLEMENTATION

ID U3-3 clear

### FUNCTION -

"clear" zero's out a block (whose block number is in r1) on the current device (cdev). "clear" does this in the following manner:

1) 'w slot' is called, which obtains a free I/O buffer (See 'poke' H.8, page 5) via 'bufaloc'.

Bits 9 and 15 of the 1st word of the I/O queue entry are set to set up the buffer for writing.

2) The buffer is zeroed and written out on the current device for the block (indicated by r1) via 'dskwr'.

### CALLING SEQUENCE -

jsr r0, clear

### ARGUMENTS -

#### INPUTS -

r1 - contains block number of block to be zeroed

cdev - current device number

r5 - points to data area of a free I/O buffer

See inputs for bufaloc, wslot, dskwr

#### OUTPUTS -

a zeroed I/O buffer onto the current device

r5 - points to last entry in the I/O buffer

r3 - has 0 in it. It counts from 256-0. It is used as a word counter in the block.

## UNIX IMPLEMENTATION

ID U3-3 copyz

**FUNCTION -**

clears core from arg1 to arg2.

**CALLING SEQUENCE -**

jsr r0, copyz; arg1; arg2

**ARGUMENTS -**

arg1 - address of lowest location in core to be cleared.

arg2 - address of highest location in core to be cleared.

arg1 < arg2

**INPUTS -**

r0 - return address for the routine calling copyz. It is used to access arg1, then arg2 and, finally, set to the actual return address of the calling routine.

**OUTPUTS -**

r0 - points to the next instruction to be executed in the calling routine.

## UNIX IMPLEMENTATION

ID U3-3 idle

### FUNCTION -

"idle" saves the present processor status word on the stack then clears the processor status word. clockp is saved on the stack. It points to one of the clock cells in the super block. clockp is then made to point to another set of clock cells specified as an argument in its call. When an interrupt occurs clockp and the processor status word are popped off the stack thus being reset to their values before the call took place.

### CALLING SEQUENCE -

jsr r0, idle

### ARGUMENTS -

s.wait + 2

### INPUTS -

ps - process status  
clockp - clock pointer

### OUTPUTS -

ps - restored to original value  
clockp restored to original value

# UNIX IMPLEMENTATION

ID U3-3 putlu

## FUNCTION -

"putlu" is called with a process number in r1 and a pointer to the lowest priority Q (runc+4) in r2. A link is created from the last process on the queue to the process in r1 by putting the process number in r1 into the last process's link. (The last process's number slot in p.link.) The process number in r1 is then put in the last process position on the queue. If the last process on the queue was "L" and the process number in r1 was "n" then upon return from putlu the following would have occurred:



## ARGUMENTS -

### INPUTS -

- r1 - user process number
- r2 - points to lowest priority queue

### OUTPUTS -

- r3 - process number of last process on the queue upon entering putlu
- p.link-i + (r3) - process number in r1
- r2 - points to lowest priority queue

## UNIX IMPLEMENTATION

ID U3-2 rswap

### FUNCTION -

"rswap" reads a process, whose number is in r1, from disk into core. 2 \* (the process number) is used as an index into p.break and p.dska. The word count in the p.break table is put in the 3rd word of the swp I/O queue entry. The disk address in the p.dska table is put in the second word. The first word of the swp I/O queue entry is set up to read. (bit 10 set to a 1) and "ppoke" is called to read the process into core.

### CALLING SEQUENCE -

jsr r0, rswap

### ARGUMENTS -

#### INPUTS -

r1 - contains process number of process to be read in  
p.break - table containing the negative of the word count for the process  
p.dska - table containing the disk address of the process  
u.emt - determines handling of emt's  
u.ilgins - determines handling of illegal instructions

#### OUTPUTS -

10 = (ilgins)  
30 = (u.emt)  
swp - bit 10 is set to indicate a read (bit 15=0 when reading is done)  
swp+2 - disk block address  
swp+4 - negative word count

## UNIX IMPLEMENTATION

ID U3-1 swap

### FUNCTION -

swap is the routine that controls the swapping of processes in and out of core. It works in the following manner:

- 1) The processor priority is set to 6.
- 2) The runq table is searched for the highest priority process. If none are found, idle is called to wait for an interrupt to put something on the queue. Upon returning after an interrupt, the queues are searched again.
- 3) The highest priority process number is put in r1. If it is the only process on that queue the queue entry is zeroed. If there are more processes on this queue the next one in line is put in the queue from p.link (see F, page 9).
- 4) The processor priority is set to 0.
- 5) If the new process is the same as the process presently in core, nothing happens. If it isn't, the process presently in core is written out onto its corresponding disk block and the new process is read in. "wswap" writes out the old process. "rswap" reads in the new one. For more information see "wswap", "rswap", "unpack" and p17 of Implementation Manual.
- 6) The new processes stack pointer is restored. The address where this process left off before it was swapped out, is put in r0. So when "rts r0" is executed this new process will continue where it left off.

### ARGUMENTS -

#### INPUTS -

- runq table - contains processes to be run. See F, page 9.
- p.link - contains next process in line to be run. See F, page 9.
- u.uno - process number of process in core.
- s.stack - swap stack used as an internal stack for swapping.

#### OUTPUTS -

- present process to its disk block
- new process into core
- u.quant = 30. (Time quantum for a process)
- u.pri - points to highest priority run Q
- r2 - points to the run queue
- r1 - contains new process number
- ps - processor status = 0
- r0 - points to place in routine or process that called swap
- all user parameters

## UNIX IMPLEMENTATION

ID U3-1 tswap

### FUNCTION -

"tswap" is the time out swap. "tswap" is called when a user times out. The user is put on the low priority queue. This is done by making a link from the last user on the low priority queue to him via a call to "putlu". Then he is swapped out.

### CALLING SEQUENCE -

jsr r0, tswap

### ARGUMENTS -

### INPUTS -

u.uno - users process number  
runq+4 - lowest priority queue

### OUTPUTS -

r0 - users process number  
r2 - lowest priority queue address

## UNIX IMPLEMENTATION

ID U3-2 unpack

### FUNCTION -

"unpack" unpacks the users stack after swapping and puts the stack in its normal place. Immediately after a process is swapped in its stack is next to the program break. "unpack" move the stack to the end of core.

If u.break is less than "core" or greater than u.usp nothing happens. If u.break is in between these locations, the stack is moved from next to u.break to its normal location at the end of core.

### CALLING SEQUENCE -

jsr r0, unpack

### ARGUMENTS -

### INPUTS -

u.break - users break point (end of users program)

### OUTPUTS -

stack gets moved if proper conditions stated above are met.

# UNIX IMPLEMENTATION

ID U3-1 wswap

## FUNCTION -

"wswap" writes out the process that is in core onto its appropriate disk area. The process stack area is copied down to the top of the program area to speed up I/O. The word count is calculated and put in "swp+4". The disk address (block number) is put in "swp+2". "swp" is set up to write by setting bit 9 and "ppoke" is called to initiate the writing. The area from user to the end of the stack is written out. The I/O queue entry "swp" is shown below just before the process is written out by ppoke.

	bit 9 among others is set	swp
	disk block address	swp+2
	neg. word count	swp+4
constant	user (address to start writing from)	swp+6

When the writing is done, bit 15 is cleared.

## ARGUMENTS -

### INPUTS -

u.break - points to end of program  
u.usp - stack pointer at moment of swap  
core - beginning of process program  
ecore - end of core  
user - start of user parameter area  
u.uno - user process number  
p.dska - holds block number of process

### OUTPUTS -

swp I/O queue (see above)  
p.break - negative word count of process  
r1 - processes disk address  
r2 - negative word count

## UNIX IMPLEMENTATION

ID U4-1 clock

### FUNCTION -

"clock" handles the interrupt for the 60 cycle clock. It increments the time of day, increments the appropriate time category and decrements the users time quantum. It then searches through the toutt table and does the following:

1) If the processor priority is high (>4) and the time in the toutt entry is not zero ( $\neq 0$ ), the time in the entry is decremented. If it turns 0 when decremented it is incremented so that it will turn 0 next time when the priority might be low (see 2 below).

2) If the processor priority is low and (1) the user is not timed out or (2) we are presently inside the system and a toutt entry gets decremented to 0, the corresponding routine in the touts table is called. If the toutt entry was 0 before decrementing nothing happens. If the user is timed out and we are outside the system the users r0 is restored to him and "sysrele" is called to swap him out and bring in another process.

### CALLING SEQUENCE -

interrupt vector

### ARGUMENTS -

### INPUTS -

lks - clock status register  
s.time+2 - time of day  
clockp - points to one of the clock cells in the super block  
u.quant - users time quantum  
sysflg - system flag - 1 is outside system, 0 is inside  
toutt - table of bytes. Each byte is a time count  
touts - table of entry points of subroutines

### OUTPUTS -

s.time+2 - incremented  
clockp - incremented  
u.quant - decremented  
toutt - entries decremented  
r0 - contains users r0 if conditions of (2) above are met

## UNIX IMPLEMENTATION

ID U4-3 ppti - paper tape input interrupt routine

### FUNCTION -

ppti does one of following dependent on value of "pptiflg"

1. If "pptiflg" indicates file not open (=0), nothing is done.
2. If "pptiflg" indicates file just opened (=2), a check is made to determine if the error bit in prs is set. If it is "pptito" is called to place I/O in the toutt entry for ppt input. If the error bit is not set, "pptiflg" is changed to indicate "normal operation" (set to 4) and "wakeup" is called to wakeup process identified in wlist for ppt input. Also, the character in the prb buffer is placed in clist if there is room. If there is no room, the character is lost. Finally a check is made to determine if the character count in the ppt input area of clist has less than 50 characters. If it does, the reader enable bit is set.
3. If "pptiflg" indicates file normal (=4) the process in the ppt input entry of wlist is woken up (via "wakeup"). A check is then made to determine if the error bit in prs is set. If it is, the "pptiflg" is set equal to 6. If it is not the contents of prb are placed in the clist via "putc". If clist is full, the character is lost. In addition if the character count for ppt input in the clist is less than 50, the reader enable bit is set.
4. If "pptiflg" indicates the file is not closed (=6), this is an indication that the error bit was set when pptiflg equalled four and therefore nothing is done.

### CALLING SEQUENCE -

ppti is the paper tape input interrupt routine

### INPUTS -

pptiflg - flag which indicates function tube performed  
prs - paper tape read status bits  
cc+2 - character count for ppt input in clist  
prb - input character

### OUTPUTS -

pptiflg - (see above)

## UNIX IMPLEMENTATION

ID U4-4 isintr

### FUNCTION -

"isintr" checks to see if an interrupt or quit from a tty belongs to the current user. If so, it won't skip on return; if not it will skip. When the interrupt does belong the output list in clist is erased via calls to getc. This prevents output coming out after the interrupt key is hit. Nothing happens except the return is skipped when:

### Case I

- 1) u.tty, the tty buffer pointer = 0
- 2) interrupt character in buffer = 0
- 3) interrupt char = "delete" and u.intr = 0
- 4) char = "fs" and u.quit = 0
- 5) no tty block is found that matches u.tty

### Case II

The return is not skipped and the output gets flushed if:

- 1) interrupt character = "fs" u.quit ≠ 0 and the tty block in control is found
- 2) interrupt character = "delete" and u.intr ≠ 0 and the tty block in control is found.

### CALLING SEQUENCE -

jsr r0, isintr

### ARGUMENTS -

### INPUTS -

u.ttyp - pointer to buffer of tty in control of the current process  
u.intr - determines handling of interrupts if 0 - nothing happens  
u.quit - determines handling of interrupts if 0 - nothing happens  
tty+6 - pointer to buffer of first tty block

### OUTPUTS -

Case I - nothing except return is skipped  
Case II - processor priority = 5  
getc - erases the output character list

## UNIX IMPLEMENTATION

ID U4-4 pptito - paper tape input touts subroutine

### FUNCTION -

If "pptiflg" indicates the file has just been opened (=2),  
"pptito":

1. places 10 in the toutt entry for ppt input
2. checks error bit in prs and sets reader enable bit if error bit not set.

For all other values "pptiflg" pptito does nothing.

### CALLING SEQUENCE -

jsr r0, pptito

### INPUTS -

pptiflg - values of this parameter indicates to pptito the function it is to perform  
prs - status of ppt reader

### OUTPUTS -

toutt+1 - contains tic count (= 10) for ppt input  
prs - read enable bit

## UNIX IMPLEMENTATION

ID U4-3 ppto - paper tape output interrupt routine

**FUNCTION -**

Calls starppt to output next character in clist ppt output.

**CALLING SEQUENCE -**

interrupt routine

**INPUTS -**

see inputs for "starppt"

**OUTPUTS -**

see outputs for "starppt"

## UNIX IMPLEMENTATION

ID U4-5 sleep

### FUNCTION -

sleep puts the process whose process number is in u.uno on the wait list (wlist) and swaps it out of core. It works in the following way:

1) A wait channel number is given as an argument to sleep. The process number occupying that channel is saved on the stack. The process number that is getting put to sleep (u.uno) is put in that wait channel.

2) A call is made to "isintr" to see if that user has any interrupts or quits. If he does a return to him via "sys-ret" is made. If he doesn't swap is called to swap out the process so it can sleep.

3) A check is made on the new user (the one who got swapped in) to see if he has any interrupts or quits. If not, a link is created to the old process number that first occupied the wait channel by a call to "putiu" a normal return is then made.

### CALLING SEQUENCE -

jsr r0, sleep; arg

### ARGUMENTS -

arg - wait channel number

### INPUTS -

u.uno - process number that gets put to sleep

w.list - wait channel list

runq+1 - lowest priority run Q

### OUTPUTS -

sleeping process number onto wlist

sleeping process onto disk

## UNIX IMPLEMENTATION

ID U4-2 tty1

### FUNCTION -

"tty1" puts a character from the tty reader buffer in r1 sets the enable bit of the tty status register, and strips the character to 7 bits. Depending on what the character is the following things may occur:

1. If the character is a letter (A-Z). It is changed to lower case and put on the clist via "putc". It is then put on the tty output buffer via "startty". If the number of characters on that clist (cc) exceeds 15 a call to "wakeup" is made to clear that list. If less than 15 nothing else happens.

2) If the character is a "}" or a "del". If also, the last tty blocks buffer pointer is zero wakeall is called and all processes are put on the low priority queue.

If the last tty blocks buffer pointer to the char (}or del) is put in the 7th byte of the buffer and wakeall is called.

3) If the char is an "eot" or "nl" cc is not checked and wakeup is called.

### CALLING SEQUENCE -

### ARGUMENTS -

### INPUTS -

tkb - tty reader buffer  
tks - tty reader status register  
cc - number of characters on the character list

### OUTPUTS -

r1 is used to contain the character  
ttyoch - has the character  
see function for other outputs depending on what the character is.

## UNIX IMPLEMENTATION

ID U4-3 ttyo

### FUNCTION -

"ttyo" is the console typewriter output interrupt routine. It calls setisp to save registers during the interrupt then calls startty to put the character in the tty output buffer and then restores the registers and returns from the interrupt.

### CALLING SEQUENCE -

interrupt routine called via trap

### ARGUMENTS -

### INPUTS -

character in ttyoch

### OUTPUTS -

see startty

## UNIX IMPLEMENTATION

ID U4-2 wakeall

### FUNCTION -

"wakeall" wakes up all the processes on the wait list by making consecutive calls to wakeup going through all the wait channels. The processes are linked together on the lowest priority queue (runq+4) used to notify the world when a quit or interrupt happens from a typewriter.

### CALLING SEQUENCE -

jsr r0, wakeall

### ARGUMENTS -

### INPUTS -

### OUTPUTS -

all sleeping processes are put on the lowest priority queue.

## UNIX IMPLEMENTATION

ID U4-5 wakeup

### FUNCTION -

wakeup is called with two arguments: arg1 is one of the run queues and arg2 is a wait channel number. wakeup wakes the process sleeping in the specified wait channel by creating a link to it from the last user process on the run queue specified by arg1. This is done by a call to "putlu". If there is no process to wake up, (wait channel contains a 0) nothing happens.

### CALLING SEQUENCE -

jsr r0, wakeup; arg1; arg2

### ARGUMENTS -

arg1 - points to one of the three run queues  
arg2 - is the number of the wait channel of the process to be awakened.

### INPUTS -

wlist - wait channel  
u.pri - users process priority

### OUTPUTS -

if u.pri > arg1 uquant = 0  
wlist (r3) = 0 - entry in wait channel = 0  
r2 - is used to point to one of the run queues  
r3 - contains the number of the wait channel

## UNIX IMPLEMENTATION

ID U4-5 starppt

### FUNCTION -

"starppt" checks the character count for ppt output in the clist. If it is greater than 10, "starppt" uses "wakeup" to wakeup process identified in "wlist" entry for ppt output. "starppt" then checks the ready bit in the punch status word. If it is set, "starppt" uses "getc" to fetch the next character in the clist and then places it in prb.

### CALLING SEQUENCE -

jsr r0, starppt

### INPUTS -

cc+3 - character count for ppt output in clist  
pps - contains ready bit

### OUTPUTS -

See outputs for "getc" and "wakeup"  
ppb - ppt output buffer

## UNIX IMPLEMENTATION

ID U4-3 retisp

### FUNCTION -

"retisp" pops the stack and restores the values of r0, r1, r2, r3 and clockp to what they were before the interrupt occurred. retisp then executes an rti and returns.

### CALLING SEQUENCE -

jmp retisp

### ARGUMENTS -

### INPUTS -

### OUTPUTS -

r0, r1, r2, r3, clockp

### CALLED BY -

trapt

### CALLS -

## UNIX IMPLEMENTATION

ID U4-1 setisp

FUNCTION -

"setisp" stores r1, r2, r3 and clockp on the stack. Puts \$s.systt2 in clockp and returns via a jump without popping the stack.

CALLING SEQUENCE -

jsr r0, setisp

ARGUMENTS -

INPUTS -

OUTPUTS -

CALLED BY -

drum

CALLS

## UNIX IMPLEMENTATION

ID U4-4 startty

### FUNCTION -

"startty" prepares the system to output a character on the console tty. It performs the following operations:

- 1 - some fooling with wakeup?
- 2 - tests console output status register read bit, if bit is clear; return.
- 3 - if bit is set check time out byte for console (toutt), if non zero; return.
- 4 - if toutt is zero, put char to be output in r1.
- 5 - load character in console data buffer register.
- 6 - if char = lf, make next char to be output a cr.
- 7 - if char = ht or cr, set time out to 15 clock cycles.

### CALLING SEQUENCE -

jsr r0, startty

### ARGUMENTS -

### INPUTS -

ttyoch (character to be output), toutt

### OUTPUTS -

tpb (loads a character in tty output data buffer register),  
r1 (character output), toutt.

## UNIX IMPLEMENTATION

ID U5-3 access

### FUNCTION -

reads in section of core beginning at location "inode" the i-node for file with i-number n. Checks whether user is owner and whether user can open file for reading or writing based on file protection bits in "i.flgs" (see Section G).

### CALLING SEQUENCE -

jsr r0, access; arg.

### ARGUMENTS -

arg0 (user, owner flagmask)

### INPUTS -

r1 (i-number of file), u.uid, i.uid

### OUTPUTS -

inode, r2 (internal)

## UNIX IMPLEMENTATION

ID U5-2 alloc

### FUNCTION -

"alloc" scans the free storage map of the super block of a specified device. When it finds a free block it saves the physical block number in r1, it then sets the corresponding bit in the free storage map and sets the super block modified byte (smod, mmod).

### CALLING SEQUENCE -

jsr r0, alloc

### ARGUMENTS -

### INPUTS -

cdev (current device), r2, r3

### OUTPUTS -

r1 (physical block number of block assigned), smod, mmod, system (drum super block), mount (dismountable super block), r2 (internal), r3 (internal).

# UNIX IMPLEMENTATION

ID U5-2 free

## FUNCTION -

Given a block number for a block structured I/O device, 'free' calculates the byte address and bit position of its associated bit in the free storage map of the in-core image of the superblock for the device (rf fixed head disk or mountable device super block). It then declares the specified block free by setting this bit. Then a flag is set to indicate that:

1) the super block for the rf-fixed head disk has been modified (smod = smod+1).

or

2) the super block for a mountable device has been modified (mmod = mmod+1).

## CALLING SEQUENCE -

jsr r0, free

## ARGUMENTS -

### INPUTS -

byte mask table:

Mask for bit	1	2	1	Mask for bit	0
" "	3	10	4	" "	2
" "	5	40	20	" "	4
" "	7	200	100	" "	6

r1 - block number for a block structured device

cdev - current device; 0=drum, nonzero=mountable device

### OUTPUTS -

mount -  $\text{system} + (\text{r2})$  word in free storage map portion of the in core image of the super block for a mountable device. If the device is mountable the appropriate bit is set to free the block. If the device is not mountable, the bit remains unchanged.

$\text{system} + 2 + (\text{r2})$  same as above, but for drum with the super block for the fixed head disk.

mmod - is incremented if the superblock for the mountable device was modified.

smod - is incremented if the superblock for the drum was modified.

r2 - saved on stack and restored on return

r3 - saved on stack and restored on return

## UNIX IMPLEMENTATION

ID U5-4 icalc

### FUNCTION -

icalc calculates the physical block number from the i-number of an i-node. It then reads in that block and calculates the byte offset in the block for the i-node with the particular i-number, then depending on whether the argument in the icalc call is a 0 or a 1 it reads the inode in the data buffer in core starting at location "inode" (argument =0). Or it will take the inode information currently stored at location "inode" and write it out on the device (argument = 1).

The physical block number and byte offset for an inode is calculated as follows:

```
let n = i-number, pbn = physical block number, bo = byte
offset
then pbn = (n+31)/16
and bo = 32.* ((n+31.) mod 16.) (See Section F for gen-
eral discussion of inodes.)
```

### CALLING SEQUENCE -

```
jsr r0, icalc; arg
```

### ARGUMENTS -

```
arg = arg = 0 read inode
arg = 1 write inode
```

### INPUTS -

```
inode = r1 (i-number)
```

### OUTPUTS -

```
inode -- r1 (internal), r5 (internal), r3 (internal)
```

## UNIX IMPLEMENTATION

ID U5-4 iget

### FUNCTION -

"iget" gets a new i-node whose i-number is in r1 and whose device is in cdev. If the new i-number and its device are the same as the current i-number and its device (r1=ii and cdev=idev) no action is taken. If they do not agree, "iget" checks to see if the current i-node has been changed (imod  $\neq$  1). If it has been changed the current i-node is written out to its device. Then if the current device is the drum, the new i-node i-number is checked to see if it is the i-number of the cross device file, if it is the current device becomes the mounted device and the i-number is set to 41. (thus the root directory for the mounted device is referenced). Then the new inode is read into the "inode" block in core via "icalc".

### CALLING SEQUENCE -

jsr r0, iget

### ARGUMENTS -

#### INPUTS -

ii (current i-number), rootdir  
cdev (new i-node device)  
idev (current i-node device)  
imod (current i-node modified flag)  
mnti (cross device file i-number)  
r1 (i-number of new i-node)  
mntd (mountable device number)

#### OUTPUTS -

cdev, idev, imod, ii, r1

## UNIX IMPLEMENTATION

ID U5-3 imap

### FUNCTION -

"imap" finds the byte in core containing the allocation bit for an i-node whose number is in r1. This core area is a copy of the super block and happens to be the i-node map. The byte address is calculated as follows:

byte addr = addr of start of map + (i-number-41)/8  
The bit position = (i-number-41) mod 8

### CALLING SEQUENCE -

jsr r0, imap

### ARGUMENTS -

#### INPUTS -

r1 - contains i-number of i-node in question

#### OUTPUTS -

r2 - has byte address of byte with the allocation bit

mq - has a mask to locate the bit position.

a 1 is in the calculated bit position

r3 - used internally

## UNIX IMPLEMENTATION

ID U5-5 itrunc

### FUNCTION -

"itrunc" truncates a file whose i-number is given in r1 to zero length. "itrunc" gets an inode via iget. It increments through the i.dskp (list of contents or indirect blocks in the inode) table and frees the blocks specified there. If the file is small, the block numbers in the i.dskp list are freed. If the file is large, i.dskp contains pointers to indirect blocks. The block numbers in these indirect blocks are then freed and the indirect blocks are freed.

### CALLING SEQUENCE -

jsr r0, itrunc

### ARGUMENTS -

#### INPUTS -

r1 - contains i-number for use by "iget"  
i.dskp - pointer to "contents or indirect blocks" in an inode  
i.flgs - contains flag for large file. See Section F, page 5  
i.size - size of file

#### OUTPUTS -

i.flags - "large file" flag is cleared  
i.size - set to 0  
i.dskp - idskp+16 - the entire list is cleared  
setimod - set to indicate i-node has been modified  
r1 - contains i-number on return from this subr.  
r3 - used in subroutine

## UNIX IMPLEMENTATION

ID U5-1 mget

### FUNCTION -

"mget" takes the byte number of a byte to be read/written in a file and obtains the physical block number of the block in which it occurs. The file offset for the byte (i.e. the byte number) is passed by passing a pointer to the offset in u.fofp. The block number for the byte is returned in r1.

Along the way several things can happen:

1. The file is small (less than  $8 * 256$  words) and the byte number extends beyond the current size of the file but does not exceed  $8 * 512$ . In this case mget assigns a new block from the free area of the file device and updates the i-node for the file by adding the physical block number of the new block and modifying the free storage map.

2. The file is small and the byte number exceeds  $8 * 512$ . In the case the status of the file changes from small to large. mget sets the large file bit in i.flgs of the i-node. Next an indirect block is assigned to the file. The block pointers in i-node are moved into the new indirect block and a pointer to the indirect block is put in the inode. Next a new data block is assigned via the large file handling logic, described below.

3. The file is large and the byte number exceeds the current size of the file, but does not exceed the capacity of the highest indirect block. mget assigns a new file block and adds a new entry to the indirect block.

4. The file is large and the byte number exceeds the current size of the file, and also exceeds the limit of the highest indirect block. A new indirect block is assigned from free storage and a pointer to it put in the i-node. Then a new file block is assigned and a pointer to it stored in the new indirect block.

(See File Structure write up in the UNIX Programmer's Manual.)

### CALLING SEQUENCE -

jsr r0, mget

### ARGUMENTS -

#### INPUTS -

u.fofp (file offset pointer), inode, u.off (file offset)

#### OUTPUTS -

r1 (physical block number), r2 (internal), r3 (internal), r5 (internal)

## UNIX IMPLEMENTATION

ID U5-3 setimod

FUNCTION -

sets byte at location "imod" to a 1, thus indicating that the i-node has been modified. Also puts the time of modification into the i-node.

CALLING SEQUENCE -

jsr r0, setimod

ARGUMENTS -

INPUTS -

s.time, s.time+2 (current time)

OUTPUTS -

imod, i.mtim, i.mtim+2

## UNIX IMPLEMENTATION

ID U6-4 cpass

### FUNCTION -

"cpass" gets the next character from the user into r1. A non-local return takes place (to the caller of "writei") when the users count (u.count) becomes zero.

### CALLING SEQUENCE -

jsr r0, cpass

### ARGUMENTS -

#### INPUTS -

u.count - users character count  
u.base - points to a users character buffer

#### OUTPUTS -

if u.count  $\neq$  0  
u.count gets decremented  
r1 contains the next character  
u.nread gets incremented  
u.base - gets incremented to point to next character  
if u.count = 0  
r0 - return address to program that called "writei"  
r1 - i-number of file under consideration

## UNIX IMPLEMENTATION

ID U6-1 readi

### FUNCTION -

"readi" reads from an i-node whose number is in r1. If the file in i-node is special a transfer is made to the appropriate routine. If not "dskr" is called and the file is read into user core. See "dskr" for details.

### CALLING SEQUENCE -

jsr r0, readi

### ARGUMENTS -

#### INPUTS -

u.count - byte count user desires  
u.base - points to user buffer  
u.foft - points to word with current file offset

#### OUTPUTS -

u.nread - accumulates total bytes passed back  
see "dskr"

## UNIX IMPLEMENTATION

ID U6-2 dskr

### FUNCTION -

"dskr" gets an inode into core via "iget". It then sets u.count according to the following rules. If the number of bytes left to read in a file is greater than the number of bytes he wants to read u.count is unchanged. If the number of bytes left to read in the file is less than u.count, u.count gets set to that number.

If the user offset u.fofp is greater than the file length there is nothing left to read so dskr returns. Once u.count is established a block address for the file is calculated via mget, the file is read into system buffers and the data is transferred to user buffers in core. If u.count is not 0 the process is repeated until u.count is 0. Processor status is then cleared.

### CALLING SEQUENCE -

jmp dskr

### ARGUMENTS -

#### INPUTS -

r1 - contains i-number  
i.size - file size in bytes  
u.count - byte count desired  
u.fofp - offset in file telling how many bytes have been read

#### OUTPUTS -

data in user buffers in core  
r2 - internal register  
ps - 0  
r3 - internal register

## UNIX IMPLEMENTATION

ID U6-4 dskw

### FUNCTION -

"dskw" writes user specified data into a file on the drum, as follows:

"dskw" obtains an i-node number from the stack. If the i-node currently residing in the i-node area of core has been modified, this i-node is written out onto the drum in its appropriate position in the i-list. In any event, the i-node specified in the stack by the caller is read into the i-node area of core. A file is composed of blocks. The caller can modify several blocks in several passes thru a single call to 'dskw'. The number of the block to be modified next is calculated by 'dskw' from the file offset (relative to the start of the file in bytes) specified by the caller in (u.fofp). The caller specifies the number of bytes to be modified in u.count. If the number of bytes the user specifies plus the offset into the file is greater than the present size of the file in bytes, i.size, then the size of the file is increased to incorporate the data overflow by changing the file size field in the i-node for the file (which is currently in the i-node area of core). The time that this file size change occurs is also inserted into the i-node and the i-node modification flag (imcd) is set. 'dskw' then uses (u.fofp) to calculate an offset (relative to the start of the block) which specifies the 1st location within the block at which the callers data is to be written. Note that the offset determines the maximum number of bytes of user data that can be written on the file during this pass thru 'dskw', 512.-file offset. If the number of data bytes the caller specifies is less than a block, the block is read from drum into a system buffer, then the appropriate bytes are overwritten. If the number of data bytes is less than a block, but exceeds 512.-file offset, only 512.-file offset bytes are overwritten. Succeeding passes thru 'dskw' are necessary to write out the rest of the data. After each pass, the modified file block (in the system buffer) is written out on drum. When all required blocks are written, counters and pointers are returned to the caller.

### CALLING SEQUENCE -

```
jsr r0, dskw
```

### ARGUMENTS -

## UNIX IMPLEMENTATION

### INPUTS -

sp - i-node number  
(u.fofp) - file offset  
u.count - number of bytes of data the caller desires to write  
i.size - size (in bytes) of file to be altered (this parameter appears in the i-node whose number is in sp).  
see inputs for "iget", "setimod", "mget", "dskrd", "wslot", "sioreg"  
r1 - pointer to callers data area  
(r1), (r1), +1, ..., (r1) + (u.count-1) - the callers data

### OUTPUTS -

i.size - file size (may have been modified by (dskw)  
see outputs for "iget", "setimod", "mget", "dskrd", "wslot", "sioreg"  
r1 - points to the location succeeding the last caller data byte transferred  
r2 - points to the location (in the system buffer) succeeding the last system buffer byte overwritten.  
r3 - 0  
u.count - 0  
modified drum file

## UNIX IMPLEMENTATION

ID U6-2 passc

### FUNCTION -

"passc" moves a byte of information specified in the lower half of r1 to the byte address specified by (u.base). It then increments u.base to point to the next byte address, increments u.nread, the number of bytes passed, and decrements u.count the number of bytes yet to be moved. If there are no more bytes to be moved, a "non-local return" to the caller of "readi" (through which control was eventually passed to passc) is taken. The current i-number is popped off the stack into r1. If there are more bytes to be transferred, the processor status is cleared and control is returned to the caller.

### CALLING SEQUENCE -

jsr r0, passc

### ARGUMENTS -

#### INPUTS -

r1 - contains a data byte in the lower half  
u.base - contains a pointer to the user area of core to which the data byte is to be transferred.  
u.nread - the number of bytes transferred  
u.count - the number of bytes to be read  
(sp) - the non-local return address  
(sp+2) - the value of r1 prior to calling "passc"

#### OUTPUTS -

(u.base) - 0, ..., (u.base)-(u.count-1) contain the transferred information  
u.base - points to the last byte transferred  
u.nread - contains the number of bytes transferred and original value of u.nread  
u.count - contains the number of bytes that still must be read  
(sp) - if non-local return popped twice  
ps - cleared

UNIX IMPLEMENTATION

ID U6-2 rcrd

FUNCTION - See "error" routine

CALLING SEQUENCE - "

ARGUMENTS - "

INPUTS - "

OUTPUTS - "

## UNIX IMPLEMENTATION

ID U6-2 ret

### FUNCTION -

"ret" is a special subroutine return, used by the following subroutines:

1. reti
2. rppt
3. dskr
4. passc
5. dskw
6. bread
7. bwrite
8. rcvt

in place of the standard return. In addition to performing standard return functions, "ret" pops the stack and puts its value in r1. It also clears the program status word. "ret" can be used simply to clear the program status word by entering via its 2nd entry point.

### CALLING SEQUENCE -

control should be passed to this routine by either a conditional or non conditional transfer to "ret" (the 1st entry point), or to '1', the secondary entry point.

### ARGUMENTS -

#### INPUTS -

- A. for primary entry : (sp)
- B. for secondary entry : -----

#### OUTPUTS -

- A. for primary entry : r1, ps
- B. for secondary entry : ps

## UNIX IMPLEMENTATION

ID U6-2 rppt - read paper tape

### FUNCTION -

"rppt" uses "pptic" to get a character in ppt input section of clist and to set reader enable bit in prs. If the ppt input section is empty and pptiflg = 6 (indication that the error bit was set during "normal operation") return is made to "rppt" to instruction "br ret" which eventually causes a return to the caller of "readi". If a character is available in clist, return is made to "rppt" at "jsr r0, passc".

Upon return from "pptic", "rppt" uses "passc" to place the character fetched by pptic into the users buffer area. If the number of characters that were specified by the user to be read in has been read in, return from "passc" is made to the caller of "readi".

It is appropriate at this point to describe how all the ppt input routines and subroutines are tied together to read ppt. First of all the ppt file must be open. To do this a "sysopen" for reading which sets the "pptiflg" indicating-file open. It also sets the reader interrupt enable bit in the prs and empties the ppt input portion of clist.

Once the file is open, a "sysread" of the ppt file is made. A pointer to the location where the characters are to be placed along with the number of characters to be read are passed as arguments to "sysread". "sysread" then uses "rwi" to set "u.count" equal to the number of characters to be read and "u.base" to the location where the characters are to be placed. "readi" is then called which jumps to "rppt" which is described above. It should be noted that when "pptic" is called to obtain a character from "clist", the process will be put to sleep if no characters are in clist (with pptiflg #6) and all characters to be read in have not been read. Also the reader enable bit is set. Upon completion of the input of the next character (ready bit set) the ppt input interrupt routine (ppti) is started which uses "wakeup" to wake up the process previously put to sleep.

### CALLING SEQUENCE -

jmp rppt

### INPUTS -

see inputs for "pptic", "passc"

### OUTPUTS -

see outputs "pptic" and "passc"

## UNIX IMPLEMENTATION

ID U6-1 rtty

### FUNCTION -

essentially, "rtty" transfers characters from the console tty buffer into a user area of core, starting at byte address (u.base). If there are no characters in the console tty buffer, "rtty" calls "canon", which gets a line (120 characters) from the console tty clist and puts it in the console tty buffer. The caller specifies the number of characters to be transferred in u.count. If the number specified is greater than the number actually in the console tty buffer, a synthetic return is taken to the caller after the characters in the buffer have been transferred. If the number specified is less than or equal to the number actually in the console tty buffer, a non-localized return to the caller of "readi" (which is the routine via which control was actually transferred to "rtty") is made when all the characters have been transferred to the users core area (via "passc").

### CALLING SEQUENCE -

[conditional or unconditional branch, or jmp] rtty

### ARGUMENTS -

#### INPUTS -

tty + 70. - contains pointer to the header of the console tty buffer.  
2(tty+70.) - 2nd word of console tty buffer header; contains a count of characters in the buffer.  
4(tty+70.) - contains a pointer to the next character in the buffer. Pointer values can include (tty+70.) + ?, (tty+70.) + 7, ..., (tty + 70.) + ?  
see inputs for "canon", "passc", "retf"

#### OUTPUTS -

r1, r5 used internally by "rtty", original values destroyed  
r5 - points to header of console tty buffer  
see outputs for "canon", "passc", "retf"

## UNIX IMPLEMENTATION

ID U6-3 wppt - write paper tape

### FUNCTION -

wppt uses "cpass" to get a character from the users buffer area and "pptoc" to output the character on the punch.

It is appropriate at this point to describe how all the ppt output routines and subroutines are tied together to output data on the ppt punch. First the ppt file must be open. This is done via a "sysopen" for writing. This places entries in the fsp table and the user's fp area.

Once the file is open a "syswrite" of the ppt file is made. A pointer to the location where the characters are stored along with the number of characters to be punched are passed as arguments to syswrite. Then uses "rw1" to set "u.count" equal to the number of characters to be punched and "u.base" equal to the location of the characters. "write1" is then called which jumps to "wppt".

"wppt" as mentioned above uses "cpass" to get a character from the user's buffer area. If the number of characters as specified in "syswrite". If not "pptoc" is called. "pptoc" first checks to see if character count for ppt output in the "clist" is 250. If it is the process is put to sleep. If it isn't the character is placed in the "clist" and "starppt" is called.

"starppt" uses "getc" to get a character from clist and inserts it into the ppb if the ready bit is set. If it isn't, control is passed back to "pptoc".

Upon completion of output of the character in ppb (ready bit set) the paper tape output interrupt routine (ppto) is started via an interrupt. This routine calls "starppt" which performs the following function on an interrupt in addition to those described in the previous paragraph. It checks to see if the character count for ppt output is less than 10. If it is it will wake up the process in the wlist entry for ppt output.

As seen from above a process puts itself to sleep when it has 250. characters in clist and is "awakened" by the paper tape output interrupt routine (ppto) when the count becomes less than 10.

### CALLING SEQUENCE -

jmp ppt

### INPUTS -

(see inputs for "cpass" and "pptoc")

### OUTPUTS -

(see outputs for "cpass" and "pptoc")

## UNIX IMPLEMENTATION

ID U6-5 sioreg

### FUNCTION -

1. calculates the first byte location (in the I/O buffer assigned to the caller) into which the callers data is to be written.
2. calculates the number of user data bytes to be transferred into this I/O buffer.
3. performs bookkeeping functions, supplying the caller with information pertinent to the data transfer.

### CALLING SEQUENCE -

jsr r0, sioreg

### ARGUMENTS -

#### INPUTS -

- (u.fofp) - specifies the byte in a file (relative to the start of the file) at which the user wants to start writing data.
- r5 - address of data area of I/O buffer assigned to the user.
- u.base - address of 1st byte of user data.
- u.count - number of bytes of data to be transferred from user data area to I/O buffer.
- u.nread - number of bytes of data written out on the file for this user previously.

#### OUTPUTS -

- (u.fofp) - specifies the byte immediately following the last byte of the file area in which the u.count bytes of user data is to be written.
- r1 - address of 1st byte of user data.
- u.base - specifies the byte immediately following the last byte of user data to be transferred to the I/O buffer.
- u.count - specifies the number of bytes of user data left to be transferred after the preceding set is transferred.
- u.nread - updated to include the count of to be transferred bytes.
- r2 - specifies the byte in the I/O buffer assigned to the caller at which the transfer of user's data is to start.
- r3 - number of bytes of user data to be transferred to users I/O buffer.

# UNIX IMPLEMENTATION

ID U6-2 write1

**FUNCTION -**

"write1" checks to see if there is any data to be written (on any device). If not, it does nothing more than return to the routine which called it. If there is data to be written, "write1" saves the i-node number of the file to be written on the stack, so it can be used by the appropriate output routine. Then "write1" checks to see if the output is to a special file (those files associated with i-nodes 1,...40., or to a non-special file. Writes for non-special files are routed to the "dskw" routine. Writes for special files are routed to appropriate routines, as follows:

Special File	Write Routine
ASR-33 : console tty	wtty
PC11 : paper tape punch	wppt
core	wmem
RF11/RS11 : fixed head disk (drum)	wrf0
RK03/RK11 : movable head disk	wrk0
TC11/TU56 : dectape unit 1	wtap
"                    "      2	"
"                    "      3	"
"                    "      4	"
"                    "      5	"
"                    "      6	"
"                    "      7	"
(any std. tty) : tty unit 1	xmtt
"                    "      2	"
"                    "      3	"
"                    "      4	"
"                    "      5	"
"                    "      6	"
"                    "      7	"

**CALLING SEQUENCE -**

n srvr0, write1

**INPUTS -**

u.count - contains a count of the number of bytes to be written  
 vr1 - contains the number of the i-node for the output file

**OUTPUTS -**

- A: to the calling routine if return is made to it by "write1"  
     u.nread - is cleared
- B: to the write routine for non-special files  
     u.nread - is cleared  
     (sp) - contains the i-node number
- C: to the write routine for special files  
     u.nread - cleared  
     (sp) - contains the i-node number  
     r1 - contains the index into the special file routine jump table

## UNIX IMPLEMENTATION

ID U6-3 wtty

### FUNCTION -

"wtty" uses "cpass" to obtain the next character in the user buffer area. If the character count for console tty is greater than or equal to 20, the process is put to sleep. If not, it then uses putc to determine if there is an entry available in "freelist" portion of "clist". If there is "putc" places the character there and assigns the location to the console tty portion of "clist". If there is no place available in the "freelist" portion of "clist", the process is put to "sleep". If there was a vacant location, "startty" is used to attempt to output the character on the tty. Upon return from "startty", the next character is obtained from the user buffer. If the buffer is empty, control is passed via "cpass" back to "syswrite". When the process is awakened by "wakeup", it again tries to find a location available in "freelist" and the character count for the console tty less than 20 so it can output the character.

### CALLING SEQUENCE -

jmp wtty

### ARGUMENTS -

#### INPUTS -

cc+1 - contains character count for console tty output.  
(see inputs for "cpass", "putc", "startty", "sleep")

#### OUTPUTS -

r1 - (character from user buffer)  
ps - processor priority set to 5  
(see outputs for "cpass", "putc", "startty", "sleep")

## UNIX IMPLEMENTATION

ID U7-1 canon

### FUNCTION -

canon handles the erase kill processing on the teletypewriters. (console tty). r5 points to the start of the tty buffer. The argument following the call is where the characters are obtained. "canon" returns only when, (1) a full line has been gathered, (2) a new line has been received, (3) an eot (004) has been received, or (4) 120 characters (the length of the buffer) have been received.

canon works in the following way:

- 1) The address of the start of the characters is put in buffer + 4 (4(r5)).
- 2) buffer + 2 (2(r5)) is cleared. This is the character count.
- 3) a character is gotten off the queue. If it is a kill character 'e' a return to the beginning is made. Actually one starts over.
- 4) If the character is an erase '#', the next character will overwrite the previous one and thereby erase it.
- 5) If the character is an eot (004) the byte pointer is reset to the first character and a return is made.
- 6) If char is none of the above, it is put in the buffer when the character pointer tells it to go "4(r5).
- 7) The character count 2(r5) and the character pointer 4(r5) are then incremented.
- 8) If the char is a new line (\n) the char pointer is reset and a return is made.
- 9) If the buffer is full (byte count > 120) the char pointer is reset and a return is made.
- 10) If the buffer isn't full, the next character off the queue is put through the above tests.

Note: canon should only be called when the number of already treated characters is zero, i.e., when the char count = 0; 2 (r5) = 0. If the char count is  $\neq$  0 the character pointer, 4 (r5) points to the first character not yet picked up.

### CALLING SEQUENCE -

jsr r0, canon, arg

### ARGUMENTS -

arg - where characters are to be obtained from


# UNIX IMPLEMENTATION

## INPUTS -

- r5 - points to tty buffer address
- 10(r5) - start of character buffer
- 2(r5) - character count
- 4(r5) - points to next character position in data area

## OUTPUTS -

- a full buffer, or a full line
- r1 pointers to buffer + 10
- 4(r5) - character pointer reset to start of data area buffer + 10

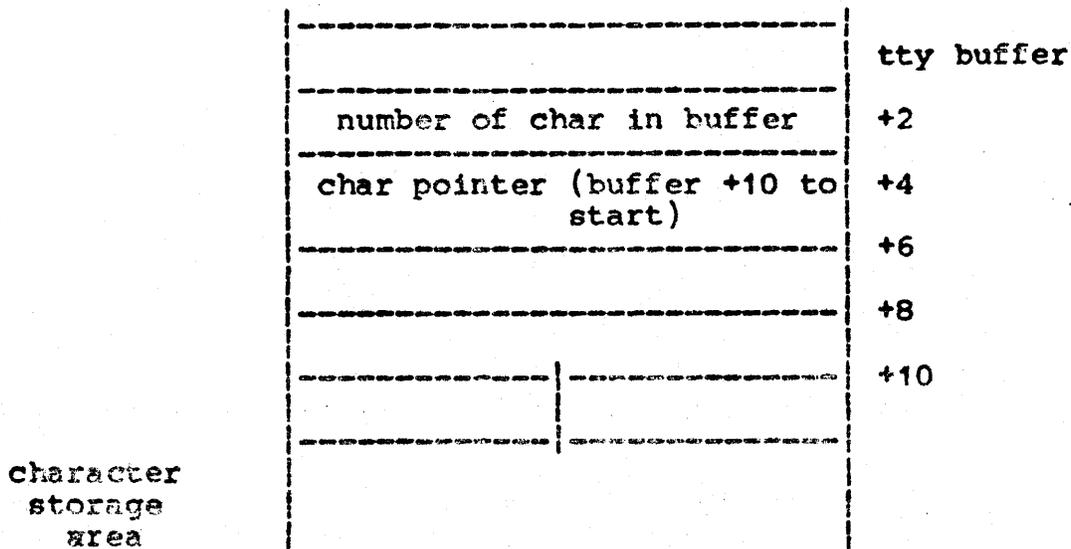

## UNIX IMPLEMENTATION

ID U7-1 cesc

### FUNCTION -

"cesc" is called by canon to check for an erase "#" or kill "@" character. r1 contains the character being tested. If the character is not an erase or kill the return is skipped. If the char is an erase or kill the character count and character pointer are decremented. If the previous character was a "\", the # or @ are taken literally and the return is not skipped.

### CALLING SEQUENCE -

jsr r0, cesc; arg

### ARGUMENTS -

arg 100 - @ means kill the line  
43 - # means erase last character

### INPUTS -

r1 - character to be tested  
2(r5) - character count  
\*4(r5) - previous character

### OUTPUTS -

skip return if test char is not erase or kill  
if character was erase or kill  
2(r5) - character count gets decremented  
4(r5) - character pointer gets decremented

## UNIX IMPLEMENTATION

ID U7-7 cppt - close paper tape file

FUNCTION -  
"cppt" assigns all ppt input locations in clist to freelist  
and sets "ppt, flg" to indicate file closed (=0).

CALLING SEQUENCE -  
jmp cppt

INPUTS -

OUTPUTS -  
See outputs for "getc".  
ps - processor priority set to 5  
pptiflg - set to "0" to indicate file closed

## UNIX IMPLEMENTATION

ID U7-6 ctty

### FUNCTION -

"ctty" closes the console tty. All it does is decrement the number of processes that have opened the console tty file. The first byte of the console tty buffer is the "number of processes that have opened this tty byte. See F, page 11. A return is made via "sret".

### CALLING SEQUENCE -

jmp table in i-close

### ARGUMENTS -

### INPUTS -

### OUTPUTS -

r5 - points to console tty's buffer  
(r5) - first byte of buffer gets decremented.

# UNIX IMPLEMENTATION

ID U7-8 error a

FUNCTION - See "error" routine

CALLING SEQUENCE - "

ARGUMENTS - "

INPUTS - "

OUTPUTS - "

## UNIX IMPLEMENTATION

ID U7-3 get

### FUNCTION -

Removes the first clist entry from the list identified by r1, makes the second entry the first. Puts the clist offset of entry removed from list in r2 return to "normal".

If the list identified by r1 is empty, r2 is returned equal to zero, and return made to "empty".

If the list has just one entry, the entry is removed and the first and last character pointers for the list are zeroed.

### CALLING SEQUENCE -

jsr r0, get; empty: ; normal:

### ARGUMENTS -

### INPUTS -

r1 (list identifier), cf+1(r1), cl+1(r1) (see Section G for general description of tty I/O handling)

### OUTPUTS -

r2 (offset into clist of entry just removed from list r1), cf+1(r1), cl+1(r1), clist (r2)

## UNIX IMPLEMENTATION

ID U7-2 getc

### FUNCTION -

"getc" removes the first clist entry from a list identified by arg, via call to get; decrements character count for list; puts the clist entry removed onto the free\_list; puts the character in the entry into r1 and takes "normal" return. If list is empty take "empty" return.

### CALLING SEQUENCE -

jsr r0, getc; arg; empty: ; normal:

### ARGUMENTS -

arg - list identifier

### INPUTS -

r2 (clist offset from put)

### OUTPUTS -

r1 (character on top of list), cc(arg), clist (r2)

## UNIX IMPLEMENTATION

ID U7-8 getspl

### FUNCTION -

"getspl" gets a device number from a special file name. "u.namep" points to the name. "namei" is called to get the i-number. i-number -4 is the device number. If it is less than or equal to zero or it is greater than 9 an error occurs. If not the device number is returned in r1.

### CALLING SEQUENCE -

jsr r0, getspl

### ARGUMENTS -

### INPUTS -

u.namep - points to the name of the special file

### OUTPUTS -

r1 - device number of the special file

## UNIX IMPLEMENTATION

ID U7-5 iclose

### FUNCTION -

"iclose" checks to see if the file, whose i-number is in r1, is special. If it is, a transfer is made to the appropriate routine. If it isn't a return is made.

### CALLING SEQUENCE -

jsr r0, iclose

### ARGUMENTS -

### INPUTS -

r1 - contains i-number of file being closed

### OUTPUTS -

If special file, r1 is put on the stack, i.e., the i-number is put on the stack.

## UNIX IMPLEMENTATION

ID U7-4 iopen

### FUNCTION -

"iopen" opens the file whose i-number is in r1. If the file is to be opened for reading "access" is called and the i-number is checked to see if the file is special. If it is special, a jump table of transfer addresses takes care of transferring control to the correct special file routine. If non-special file, a return is made. If the file is to be opened for writing, "access" is called and a check is made to see if the file is a directory. If it is, an error occurs, because users cannot write into directories. Special files are handled in the same manner as above.

### CALLING SEQUENCE -

jsr r0, iopen

### ARGUMENTS -

### INPUTS -

r1 - contains i-number of the file to be opened

### OUTPUTS -

files i-node is in core

r1 - if i-number was negative upon entry it is positive on exit

## UNIX IMPLEMENTATION

ID U7-5 oppt - open paper tape file for read or write

### FUNCTION -

oppt performs the following functions:

1. Sets the reader enable bit in prs.
2. Assigns all ppt input locations in "clist" to freelist.
3. Sets "pptiflg" to indicate file just open (=2) and places 10 in toutt entry for ppt input.

### CALLING SEQUENCE -

jmp oppt

### INPUTS -

pptiflg - used to determine if file already open

### OUTPUTS -

pptiflg - set by oppt to indicate file just open  
ps - processor priority set to 5  
prs - contains reader enable bit  
toutt ti - contains count for ppt input  
See outputs for "getc".

## UNIX IMPLEMENTATION

ID U7-5 otty

### FUNCTION -

"otty" opens the console tty for reading or writing. The interrupt enable bits are set in the tks and the tps. If the console is the first tty opened in this process assign its buffer address to u.ttyp return through "sret".

### CALLING SEQUENCE -

[conditional or unconditional branch, or jmp] otty

### ARGUMENTS -

#### INPUTS -

see inputs for "sret"

u.ttyp - points to the buffer header for the process control typewriter

(tty+70.) - lower byte of 1st word of header contains the number of processes that opened the buffer

tty+70. - contains pointer to the header of the console tty buffer

#### OUTPUTS -

u.ttyp - points to the console tty buffer header if it was the 1st tty opened by the process. Otherwise points to ?

r5 - points to header of console tty buffer

(r5) - lower byte (number of processes that opened the buffer) incremented by one.

tks - reader status register interrupt enable bit set, rest of bits zeroed.

tps - punch status register

See outputs for sret

## UNIX IMPLEMENTATION

ID U7-2 pptic - paper tape input control

### FUNCTION -

"pptic" performs the following functions for ppt input:

1. If the error, busy and done bits are not set in the prs and the character count for ppt input in the clist is less than 30, pptic sets the reader enable bit.
2. Uses "getc" to get character from paper tape input area of clist. If this area of "clist" is empty, a check is made to see if "pptiflg" is set equal to six (indication that error flag in prs is set during normal operation). If it is, return is made to the calling routine which in turn vreturns to its calling routine. If "pptiflg" does not equal six, the process is put to sleep.

### CALLING SEQUENCE -

jsr r0, pptic

### INPUTS -

cc+2 - contains clist character count for ppt input  
prs - contains status bits for ppt reader  
pptiflg - indicates condition of ppt file

### OUTPUTS -

prs - contains reader\_enable bit  
see outputs for getc  
ps - processor priority set to 5 and then to 0.

## UNIX IMPLEMENTATION

ID U7-2 pptoc - paper tape output control

### FUNCTION -

"pptoc" first checks to see if the character count for ppt output in the clist is greater than 50. If it is, the process is put to sleep. If it isn't "putc" is used to place the character which is in r1, in the clist. If the clist is full, the process is put to sleep. If the character is placed in clist, "starppt" is called to output the next entry in the ppt output section of clist.

### CALLING SEQUENCE -

jsr r0, pptoc

### INPUTS -

cc+3 - character count for ppt input in clist

### OUTPUTS -

ps - processor priority set equal to fluf  
see outputs for "starppt" and "sleep" and "putc"

## UNIX IMPLEMENTATION

ID U7-3 put

### FUNCTION -

Takes a clist entry pointed to by r2, and makes it the last entry in the list identified by r1.

If this is the first entry in a currently empty list then the first char pointer in cf is also updated.

### CALLING SEQUENCE -

jsr r0, put

### ARGUMENTS -

### INPUTS -

r1 (list identifier)  
r2 (clist offset)

### OUTPUTS -

cl+1(r1), clist-1(r2), cf+1(r1)

## UNIX IMPLEMENTATION

ID U7-3 putc

### FUNCTION -

Puts a character at the end of a list identified by the argument in the putc call.

In detail it takes a clist entry from the free list via call to "get". Appends the entry to the list identified by arg via call to "put". Then fills in the new entry with a character passed in r1.

### CALLING SEQUENCE -

jsr r0, putc; arg

### ARGUMENTS -

arg - list identifier (see discussion in G on tty device I/O)

### INPUTS -

r1 - character from device buffer.

### OUTPUTS -

r2 - clist offset where character stored, cc(arg), clist-1(r2)

## UNIX IMPLEMENTATION

ID U7-7 sysmount

### FUNCTION -

"sysmount" announces to the system that a removable file system has been mounted on a special file. The device number of the special file is obtained via a call to "getspl". It is put in the I/O queue entry for the dismountable file system (sb1) and the I/O queue entry is set up to read. (bit 10 is set). "ppoke" is then called to read the file system into core, i.e. the first block on the mountable file system is read in. This block is the super block for the file system. This call is super user restricted.

### CALLING SEQUENCE -

sysmount; special; nami

### ARGUMENTS -

special - pointer to name of special file (device)  
name - pointer to the name of the root directory of the newly mounted file system. "name" should always be a directory.

### INPUTS -

mnti - records i-number of unique cross file device  
sp - contains the name of the file  
sb1 - I/O queue entry for the dismountable file system

### OUTPUTS -

mnti - i-number of special file  
mntd - device number of special file  
sb1 - has device number in lower byte  
cdev - has device number  
file system is read into core via ppoke

## UNIX IMPLEMENTATION

ID U7-8 sysumount

### FUNCTION -

"sysumount" announces to this system that the special file, indicated as an argument, is no longer to contain a removable file system. "getspl" gets the device number of the special file. If no file system was mounted on that device an error occurs. mntd and mnti are cleared and control is passed to sysret.

### CALLING SEQUENCE -

sysumount; special

### ARGUMENTS -

special - special file to dismount (device)

### INPUTS -

mntd - device number of mounted device

sb1 - I/O queue entry for the dismountable file system

### OUTPUTS -

mntd - zeroed

mnti - zeroed

## UNIX IMPLEMENTATION

ID U7-8 sysreta

FUNCTION - See "sysret" routine

CALLING SEQUENCE - "

ARGUMENTS - "

INPUTS - "

OUTPUTS - "

## UNIX IMPLEMENTATION

ID U7-1 ttych

### FUNCTION -

"ttych" gets characters from the queue of characters inputted to the console tty. If there are none, sleep is called. ttych works in the following manner:

1. the processor priority is set to 5
2. a character is gotten off the queue via "getc" if the list is empty, sleep is called.
3. if not the process status is cleared and a return is made.

### CALLING SEQUENCE -

```
jsr r0, *(r0) ttych was an argument in the call to  
"canon".
```

### ARGUMENTS -

### INPUTS -

### OUTPUTS -

ps = 0  
r1 - character on top of list  
See getc number 7, page 2 for others.

## UNIX IMPLEMENTATION

ID U8-1 bread

### FUNCTION -

"bread" reads a block from a block structured device (rk, rf, tape). It operates in the following way:

1. If "cold" =1 (cold boot) the block specified in r1, is read into an I/O buffer via "preread". If its a warm boot (cold=0) the block in r1 and the next consecutive block are read into I/O buffers via "preread". The reason two blocks are read in is to speed up the overall reading process. On a cold boot, however, only two I/O buffers are available, so only one buffer is used.
2. The block number is always checked to see if the maximum block number allowed on the device has been exceeded. (see argument) If the block number does exceed the maximum, an error occurs.
3. "preread" is called again on the first block. Since the first block is already in an I/O buffer, all preread will do is reverse the priority (see bufaloc H.8, page 9) so that the first block is of higher priority than the second.
4. Bit 14 of the first block's I/O buffer is set.
5. Bits 10 and 13 (the read bits) of this I/O buffer are now checked. If they are set (reading is still in progress) and the device is disk or drum, or the device is tape and "uquant"  $\neq$  0 "idle" is called. If the device is tape and uquant = 0, "sleep" is called. If bits 10 and 13 are 0 (read done), bit 14 of the I/O buffer is cleared and the data is moved from the I/O buffer to the users area. "dioreg" does the bookkeeping on the transfer.
6. If u.count =0 the reading is finished. If not a branch back to the start is taken and the above steps are repeated.
7. A return is taken to the routine that called "readi".

### CALLING SEQUENCE -

```
jsr r0, bread; arg
```

### ARGUMENTS -

arg - maximum block number allowed on device

### INPUTS -

r2 - points to the users data area; r3 has the byte count  
(u.fofp) - is the block number  
cdev - is the device  
u.base - base of users data area  
u.count - number of bytes to read in  
r1 - is used internally as the block number  
cold - 0 warm boot or 1 cold boot  
r5 - points to the beginning of the I/O buffer or the data area  
u.quant - time quantum allowed for each process

## UNIX IMPLEMENTATION

### OUTPUTS -

block or blocks of data into the users area starting at u.base  
(u.fofp) - points to next consecutive block to be read  
r3=0 - (used internally)

## UNIX IMPLEMENTATION

ID U8-3 dioreg

### FUNCTION -

"dioreg" does the bookkeeping on block transfers of data. It first checks to see if there are more than 512 bytes to transfer. If so, it just takes 512. If not, it takes u.count.

### ARGUMENTS -

#### INPUTS -

u.count - number of bytes user wants transferred  
u.base - start of users data area

#### OUTPUTS -

r3 - used internally to hold the count  
u.nread - updated by adding r3  
u.base - updated by adding r3  
u.count - updated by subtracting r3  
r2 - has value of u.base before it gets updated

## UNIX IMPLEMENTATION

ID U8-2 bwrite

### FUNCTION -

"bwrite" writes on a block structured device (rf, rk, tape). It operates in the following way:

- 1) The block number is placed in r1.
- 2) If the block number exceeds the maximum allowable block number of the device an error occurs.
- 3) (u.fofp) is incremented to point to the next block in sequence.
- 4) "wslot" is called to get an I/O buffer to write into.
- 5) "dioreg" is called to set up the bookkeeping for the transfer.
- 6) The data is then transferred from the users area to the I/O buffer.
- 7) "dskwr" is called to write it onto the device.
- 8) If u.count ~~≠ 0~~, the procedure is repeated. If it is, a return to the routine that called "writei" is made.

### CALLING SEQUENCE -

```
jsr r0, bwrite; arg
```

### ARGUMENTS -

arg - is the maximum allowable block number for the device.

### INPUTS -

(u.fofp) is the block number  
cdev - is the device  
r1 - is used internally to hold the block number  
r5 - points to the I/O data buffer  
r2 - points to the users data area; initially its u.base  
u.count - number of bytes user desires to write  
r3 - has the byte count

### OUTPUTS -

(u.fofp) is the next block to be written into  
r3=0 (used internally)

## UNIX IMPLEMENTATION

ID U8-7 drum

### FUNCTION -

"drum" is the interrupt handling routine for the drum. drum is called after the transfer of data to or from the drum is complete, i.e., when the ready bit in the dcs (drum control register) is set. (see interface manual, page 73-74.) r1, r2, r3 and clockp are saved on the stack (see setisp) calls "trapt" to check for stray interrupt or error. If neither, it clears bits 12 and 13 in 1st word of transaction buffer, checks for more disk buffers to read into or write; then returns from interrupt by calling retisp.

### CALLING SEQUENCE -

called by interrupt vector at location 204 after data transmission has taken place, i.e., ready bit of dcs set.

### INPUTS -

same as setisp, trapt and retisp

### OUTPUTS -

same as setisp, trapt and retisp

### CALLED BY -

interrupt vector

### CALLS -

setisp, trapt



## UNIX IMPLEMENTATION

byte 2.3 - physical block number (see Section F, discussion of file system)

byte 4-5 - word count - number of words in buffer; loaded into word count register for device.

byte 6-7 - bus address - address of first word of data buffer.

In addition to the general I/O queue entries there are three special entries at locations sb0, sb1, and swp. These are the I/O queue entries for the super block for drum (sb0), the super block for the mounted device (sb1), and the core image being swapped in or out (swp) - these entries are initialized in the "allocate disk buffers" segment of code in u0.

An area in core starting at location "bufp" and extending nbuf + 3 words, contains pointers to the I/O queue entries. This table of pointers represents the priority of I/O requests, since poke scans these pointers starting at the highest address in "bufp", examining the control bits in byte 1 of each I/O queue entry pointed to by the bufp pointers. If either bit 9 or 10 is set and neither of bits 15, 13, or 12 is set then poke will attempt to honor the I/O request.

To honor an I/O request, poke checks "active" to see if the bit associated with the device is clear. If it is clear poke initiates the I/O operations by loading the appropriate device registers. In all I/O operations the interrupt is enabled and thus when completed an appropriate routine is called via the interrupt. When poke initiates a I/O operation it clears bit 9 or 10 and sets bit ~~11~~<sup>12</sup> or ~~12~~<sup>13</sup>. The routine called upon completion of the I/O operation will clear bit ~~11~~<sup>12</sup> or ~~12~~<sup>13</sup> thus freeing that I/O queue entry.

"poke" calculates a physical disk address (which is loaded into register rkda) from the physical block number in the following way:


```
let N = physical block number
then
    sector number = remainder N
                    -
                    12.
    surface = 0; quotient N even
                    -
                    12.
                1; quotient N odd
                    -
                    12.

    cylinder = quotient quotient N /2
                    -
                    12.
```

## UNIX IMPLEMENTATION

"poke" calculates a physical disk address for the drum from the physical block number in the following way:

The drum address is given in the dae and dar registers.

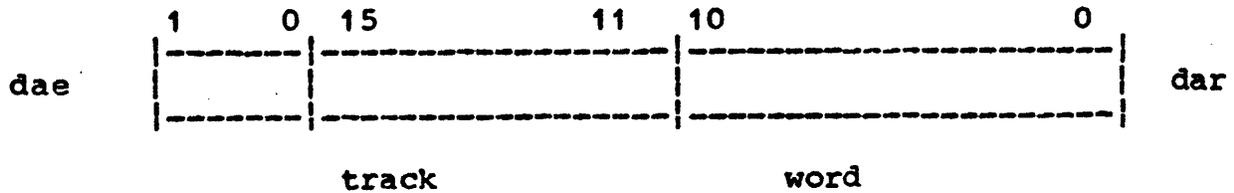

The physical block number is essentially multiplied by 256 (by shifting the low order byte into the high order byte of the dar, and shifting the high order byte into the low order byte of the dae).

CALLING SEQUENCE -  
jsr r0, poke

ARGUMENTS -

INPUTS -  
buffer pointers,  
I/O queue entries

OUTPUTS -  
sets bits 12 and 13 on I/O queue entries where I/O operation is initiated.

## UNIX IMPLEMENTATION

ID U8-5 bufaloc

### FUNCTION -

"bufaloc" scans the I/O buffers for block structured devices, looking for an active buffer (bits 9,...15 of the 1st word in the I/O queue entry for the buffer are set) which has already been assigned to the block number and device currently under consideration, or for a free buffer (bits 9,...15 not set) which has been previously assigned to this device and block number. If there is no such buffer, the vacant buffer with the highest core address is assigned. If no free buffer is found, "bufaloc" calls "idle". Eventually, a buffer is located. The routine "poke" which actually performs the I/O operations scans the "bufp" area of core from the highest to the lowest address. Thus the priority of an I/O queue entry is established by where a pointer to the I/O queue entry appears in bufp.

The newly assigned buffer I/O queue entry pointer is placed in "bufp" thus making it the lowest priority I/O operation in the queue. The other entries in "bufp" are moved into higher addresses to accomodate the newly assigned buffers I/O queue entry pointer at location bufp.

Once the buffer has been assigned the device number is put into the low half of word 1 of the corresponding I/O queue entry and the block number is put into word 2 of the I/O queue entry.

### CALLING SEQUENCE -

```
jsr r0, bufaloc
```

### ARGUMENTS -

#### INPUTS -

```
cdev, r1 (block number), bufp+2*n-2, (bufp+2*n-2),  
(bufp+2*n-2) +2:n=1,...,nbuf}
```

#### OUTPUTS -

```
r5 (pointer to buffer assigned), bufp,...,bufp+12, (bufp),  
(bufp)+2,ps
```

## UNIX IMPLEMENTATION

ID U8-3 dskrd

### FUNCTION -

"dskrd" acquires an I/O buffer, puts in the proper I/O queue entries (via bufaloc) then reads a block (number specified in r1) into the acquired buffer. If the device is busy at the time dskrd is called, dskrd calls idle. Once the I/O operation is completed r5 is set to point to the first data word in the buffer.

### CALLING SEQUENCE -

jsr r0, dskrd

### ARGUMENTS -

### INPUTS -

### OUTPUTS -

r5 - pointer to first word in data block; (r5) ; ps

# UNIX IMPLEMENTATION

ID U8-3 dskwr

FUNCTION -

*7. des!*  
"dskwr" writes a block out on disk, via ppoke. The only thing dskwr does is set bit 15 in the first word of the I/O queue entry pointed to by "bufp". "wslot" which must have been called previously has supplied all the information required in the I/O queue entry.

CALLING SEQUENCE -

jsr r0, dskwr

ARGUMENTS -

INPUTS -

OUTPUTS -

(bufp)

## UNIX IMPLEMENTATION

ID U8-3 error 10

FUNCTION - See "error" routine

CALLING SEQUENCE - "

ARGUMENTS - "

INPUTS - "

OUTPUTS - "

## UNIX IMPLEMENTATION

ID U8-3 preread

### FUNCTION -

"preread" is called by "bread" to read in a disk block on device "cdev". The block number is in r1. "preread" gets a free I/O buffer via "bufaloc". It sets bit 10 of the first word of the I/O buffer and then reads the specified block into the I/O buffer via "poke". If the I/O buffer already contains the specified block bit 10 is not set and the call to "poke" is skipped. The processor status is then cleared.

### CALLING SEQUENCE -

jsr r0, preread

### ARGUMENTS -

#### INPUTS -

r1 - block number to read  
r5 - points to first word of I/O buffer

#### OUTPUTS -

specified block into an I/O buffer  
ps = 0  
r5 - points to first word of the I/O buffer

## UNIX IMPLEMENTATION

ID U8-1 rtap

### FUNCTION -

"rtap" is the read routine for dec tape. The device number is  $(i\text{-number}/2)-4$ . The i-number is in r1 upon entry. "bread" is called to read the proper block or blocks.

### CALLING SEQUENCE -

from jump table in readi

### ARGUMENTS -

#### INPUTS -

r1 - is the i-number of the special file

#### OUTPUTS -

cdev is the device number  
see outputs for "bread".

## UNIX IMPLEMENTATION

ID U8-6 tape

### FUNCTION -

"tape" handles the dec tape interrupts. "setisp" is first called to save registers and the clockp. The state of the dec tape (tstate) i.e., reading, writing, idle, etc. is put in r3. "trapt" is then called to check for data transmission errors. If none occur control passes to the appropriate dec tape routine depending on what the stat is. Control is passed by putting r3 in the pc. If an error occurs a jump to "taper" is made.

### CALLING SEQUENCE -

interrupt vector

### ARGUMENTS -

### INPUTS -

tcstate - the state of the dec tape (read, write, etc.)

### OUTPUTS -

control passes to appropriate dec tape routine

pc - set to address of above routine

r3 - is used to hold the address of above routine

## UNIX IMPLEMENTATION

ID U8-8    trapt

### FUNCTION -

"trapt" is part of the drum, disk, or dec tape interrupt handler. The ready bit of the device control register is checked. If the ready bit is not set the device is still active so a return through "retisp" is made. It then checks to see if a stray interrupt has occurred. If not, "trapt" checks to see if an error in the data transmission has occurred. If so, the return is skipped. If not, the return is not skipped. The return is via a jmp.

### CALLING SEQUENCE -

```
jsr r0, trapt; dv; buf; act  
br normal  
br error
```

### ARGUMENTS -

dv - device control status register (for dec tape it is the command register)  
buf - contains address of disk buffer being read into or written  
act - tested against the bits in "active" to see if the device was busy

### INPUTS -

active - contains bits that tell which devices are busy

### OUTPUTS -

r1 - points to the disk buffer  
r2 - points to the device control and status register or command register depending on the argument.

## UNIX IMPLEMENTATION

ID U8-2 tst devc

### FUNCTION -

"tstdevc" checks to see whether a permanent error has occurred on special file I/O. (It only works for tape, however.) If there is an error, the error is cleared and the user is notified.

### CALLING SEQUENCE -

jsr r0, tstdevc

### ARGUMENTS -

### INPUTS -

cdev - the device in question  
(r1)+deverr - the device's in question error indicator

### OUTPUTS -

r1 = cdev = the device number  
If no error, nothing else happens  
If error, (r1) + deverr gets cleared and user notified via error 10.

## UNIX IMPLEMENTATION

ID U8-3 wslot

### FUNCTION -

"wslot" calls "bufaloc" and obtains as a result, a pointer to the I/O queue of an I/O buffer for a block structured device. "bufaloc" has inserted into this I/O queue the device number and block number which "wslot" passes from its caller to "bufaloc".

It then checks the first word of the I/O queue entry. If bits 10 and/or 13 (read bit, waiting to read bit-sec H.8, p. 5) are set, "wslot" calls "idle".

When "idle" returns, or if bits 10 and/or 13 are not set, "wslot" sets bits 9 and 15 of the first word of the I/O queue entry (write bit, inhibit bit), sets the processor priority to zero, and sets up a pointer to the first data word in the I/O buffer associated with the I/O queue.

### CALLING SEQUENCE -

jsr r0, wslot

### ARGUMENTS -

#### INPUTS -

See inputs for "bufaloc" - H.8 p. 1

#### OUTPUTS -

(bufp) - bits 9 and 15 are set, the remainder of the word is left unchanged

ps - 0

r5 - points to first data word in I/O buffer

See outputs for "bufaloc" - H.8 p. 1. Note that outputs given above take precedence over outputs from "bufaloc"

## UNIX IMPLEMENTATION

ID U9-6 rcvch - receive character

### FUNCTION -

"rcvch" uses "getc" to read a character from the tty's read section of the clist. If it is empty, the process is put to sleep. When the process is awakened, rcvch again tries to obtain a character from clist.

### CALLING SEQUENCE -

jsr r0, rcvch

### INPUTS -

r2 - contains 8xtty no.  
msr + 8xttyn - carrier detect and clear data term bits  
See inputs for "getc" and "sleep".

### OUTPUTS -

ps - set processor status to 5  
See outputs for "sleep" and "getc"

## UNIX IMPLEMENTATION

ID U9-6 rcvt - read tty

### FUNCTION -

"rcvt" places tty characters in the user buffer area. If the "raw" flag in the tty area is set a character is obtained from the tty's input area of clist. If the flag is not set, "canon" is used to process a line of tty characters and place them in the users buffer area.

### CALLING SEQUENCE -

jmp rcvt

### INPUTS -

r1 - contains 2xttyno.  
rcsr+8xttyno - carrier detect and clear data term bits  
tty+8xttyno+6 - pointer to tty buffer  
tty+8xttyno+4 - raw data flag  
See inputs for "canon", "passc", getc and rcvch

### OUTPUTS -

ps - set processor priority to 5  
See "canon", "passc", "getc", "rcvch" and "sleep" outputs.

## UNIX IMPLEMENTATION

ID U9-3 starxmt

### FUNCTION -

starxmt does the following:

1. checks to see if the output character count for the tty in clist is less than 10. If it is, "starxmt" uses "wakeup" to wakeup the process identified in the "wlist" entry for the tty output channel.
2. Checks to see if the toutt entry for the tty output is equal to zero. If it is not, control is passed back to the calling routine.
3. Checks to see if the ready bit in the tty's tscr register is set. If it is not, control is passed back to calling routine.
4. Checks 3rd byte of tty's "tty" area (contains character left over after lf.) for a null character. If the byte contains a non null entry, the entry is used as the next character to be output. If the entry is nul, the next character to be output is obtained from the clist via "getc".
5. Adds 200 to ASC11 code of character to be output if digit 2 (far left digit) of entry in "partab" table for character is a "2".
6. Checks tty's rcsr buffer to determine if carrier is present. If it is not, the character is "dropped" and a new character is obtained by returning to the beginning of the subroutine. If the carrier is present a check is made to determine if the character to be output is "ht". If it is a check is made to see if the tab to space flag (bit 1 of 5th byte in tty area) is set. If it is the character to be output is changed to a space (ASC11 40).
7. Places character to be output in tty's "tcsr" buffer. "starxmt" then does one of the following dependent on the character to be output (digits 0 and 1 of the characters "partab" entry are used as offsets into jump table).
  - a. For ASC11 codes 40-176, increments column pointer which is in byte 2 of tty area.
  - b. For ASC11 codes 0-7, 16-37 and 177, does nothing.
  - c. For ASC11 0 10 (bs), decrements column pointer.
  - d. For ASC11 012 (lf), checks for setting of cr flag (bit 4 of 4th byte in "tty" area). If it is set ASC11 015 (cr) is placed in byte 3 of "tty" area (character left over after line feed). "starxmt" then determines value for the tty's output entry in the tout table. This value is dependent on whether "lf" is to be output or both "lf" and "cr".

## UNIX IMPLEMENTATION

e. For ASC11 011 (ht) does some fooling around with column count and 3rd byte of "tty" area (character left over after lf) dependent on value of "tab to space" flag in 5th byte of "tty" area. It then determines value for the tty's output entry in the tout table.

f. For ASC11 013 (vt), determines value for the tty's output entry in tout table.

g. For ASC11 015 (cr), determines value for the tty's output entry in tout table and sets column pointer = 0.

### CALLING SEQUENCE -

jsr r0, starxmt

### INPUTS -

(sp) - contains 8xtty number

tty+3+8xttynumber - contains offset in cc, cf, and cl lists for tty

cc+(tty+3+8xttynumber)+1 - contains character count for tty output in clist

tty+1+8xttynumber - contains column pointer for tty

tty+2+8xttynumber - contains character left over after lf for tty

tty+4+8xttynumber - contains flags for tty

See outputs for "getc".

rcsr+8xttynumber - contains carrier present flag for tty

tcsr+8xttynumber - contains ready flag for tty

### OUTPUTS -

See inputs to "getc"

cc+(tty+3+8xttynumber)

tty+1+8xttynumber

see inputs above

tty+2+8xttynumber

tcsr+8xttynumber - contains character to be output on tty

toutt+3+ttynumber - contains tout entry for tty

## UNIX IMPLEMENTATION

ID U9- xmtt

### FUNCTION -

"xmtt" uses "cpass" to obtain the next character in the user's buffer area. If the character count for the tty (identified by i-node number of tty's special file in stack) is greater than 50, the process is put to sleep. If not, "xmtt" uses "putc" to determine if there is an entry available in "freelist" portion of "clist". If there is, "putc" places the character there and assigns the location to the tty portion of "clist". If there is no location available in "freelist" portion of "clist", the process is put to sleep. If there is a vacant location, "starxmt" is used to attempt to output the character on the tty. Upon return from "starxmt" the next character is obtained from the user's buffer area. If the buffer is empty, control is passed back to the calling routine via "cpass". When the process is awakened by "awake", it tries again to find a location available in freelist and a character count for the tty output less than 50 so it can output characters.

### CALLING SEQUENCE -

jmp xmtt

### INPUTS -

See inputs for "cpass".  
(sp) - contains i-number of tty's special file  
r1 - contains character to be placed in clist uponvreturn from "cpass"

### OUTPUTS -

See inputs for "starxmt" and "putc"  
processor priority set to 5